


PRODUCT FEATURES

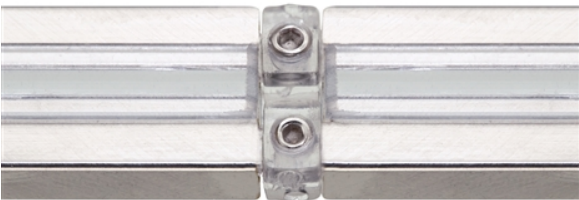

LAMPING

Two common uses are in runs using more than 300w or in runs over 30ft where two power feeds are required to avoid voltage drop. All dual-feed canopies and dual-feed surface transformers are shipped with isolating connectors; order additional if required by layout. Pair.

MonoRail Isolating Connectors



MonoRail Isolating
Connectors

ORDERING INFORMATION

700MOCINC


700MOCINC	_____
JOB NAME	_____
NOTES	_____

MONORAIL ISOLATING CONNECTORS

VISUAL COMFORT & CO.

SPECIFICATIONS

PRIMARY MATERIAL	
SHADE MATERIAL	
NET WEIGHT	0.01 lbs
HEIGHT	0.3in
WIDTH	1.1in
LENGTH	1.1in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	



LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**			1 Year	

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

