

MONORAIL RIGID STANDOFF

VISUAL COMFORT & CO.

PRODUCT FEATURES



LAMPING

Rigid standoffs are compatible with various power feed options: Use the chart below to determine the appropriate standoff for your run.

MonoRail Rigid Standoff



MonoRail Rigid Standoff

ORDERING INFORMATION

700MOS	LENGTH (A)	FINISH
	01 1"	R AGED BRASS
	02 2"	Z ANTIQUE BRONZE
	03 3"	S SATIN NICKEL
	04 4"	
	05 5"	
	06 6"	
	12 12"	
	24 24"	
	36 36"	
	48 48"	
	96 96"	

Aged Brass only available in certain lengths.


700MOS

JOB NAME

NOTES

SPECIFICATIONS

PRIMARY MATERIAL	
SHADE MATERIAL	
NET WEIGHT	0.25 lbs
HEIGHT	0.8in
WIDTH	0.7in
LENGTH	
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

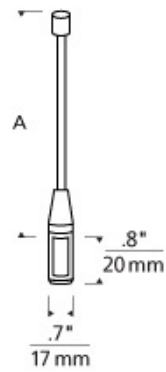

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**	1 Year			

* Dimming information available at www.techlighting.com/Downloads#dimming
** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.