

# Visual Comfort and Company

## TEST REPORT

**SCOPE OF WORK**

LM-79 testing report

**REPORT NUMBER**

230223104GZU-003

**ISSUE DATE**

21-March-2023

**REVISION DATE**

None

**NUMBER OF PAGES**

13

**DOCUMENT CONTROL NUMBER**

Report format for LM-79:2008\_F

© 2021 INTERTEK



Report No.: 230223104GZU-003

## TEST REPORT

### TEST OF ONE LED LUMINAIRE

MODEL NO. SLPC11830X

(Remark: "X" denote other appearance colors for the characters that change)

#### RENDERED TO

Visual Comfort and Company

Contact Name: Tess Gallagher

7400 LINDER AVE. SKOKIE, IL, 60077

Email: Tgallagher@visualcomfortco.com  
Phone No.: 8474104774

|                                 |                                                                                                                                                                |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <u>TEST:</u>                    | Electrical and Photometric as required to the IES LM-79 test standard.                                                                                         |
| <u>STATEMENT OF LIMITATION:</u> | The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.       |
| <u>AUTHORIZATION:</u>           | The testing performed was authorized by signed quote number: QGZ230214004.                                                                                     |
| <u>STANDARDS USED:</u>          | The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen: |
| IES LM-79: 2008                 | Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products                                                               |
| ANSI C78.377:2017               | Specifications of the Chromaticity of Solid State Lighting Products                                                                                            |
| <u>DESCRIPTION OF SAMPLE:</u>   | The client submitted one sample of model SLPC11830X. The sample was received, in undamaged condition. The sample designation was S230223104-003.               |
| <u>DATES OF TESTS:</u>          | 25 February 2023                                                                                                                                               |
| <u>ISSUED BY:</u>               | Intertek Testing Services Shenzhen Ltd. Guangzhou Branch                                                                                                       |
| <u>TEST LOCATION:</u>           | Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China                    |

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### SUMMARY

|               |                |
|---------------|----------------|
| Model Number: | SLPC11830X     |
| Description:  | LED Luminaries |
| Brand Name:   | --             |

#### Test Condition: 120V, 60Hz For SLPC11830X

| Criteria                           | Result    |
|------------------------------------|-----------|
| Total Lumen Output                 | 711.3 lm  |
| Total Power                        | 18.8 W    |
| Luminaire Efficacy                 | 37.9 lm/W |
| S/MH(C0/180)                       | 1.26      |
| S/MH(C90/270)                      | 1.16      |
| Correlated Color Temperature (CCT) | 2810 K    |
| Color Rendering Index (CRI)        | 94        |
| R9                                 | 69        |
| Chromaticity Coordinate (x)        | 0.4480    |
| Chromaticity Coordinate (y)        | 0.4027    |
| Chromaticity Coordinate (u')       | 0.2584    |
| Chromaticity Coordinate (v')       | 0.5225    |

#### Remark:

Measurement uncertainty for applicable tests has been established.

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### EQUIPMENT LIST

| Equipment Used                      | Model Number | Control Number |
|-------------------------------------|--------------|----------------|
| Goniophotometer System              | Go-R5000     | SA063-16       |
| KONICA MINOLTA - Illuminance meter  | CX-2B_WL     | SA063-16-01    |
| Standard Lamp                       | D215S        | SA063-16-06    |
| Digital Power Meter                 | PLM3000      | SA063-16-09    |
| AC power source for Goniophotometer | PCR-1000WH   | SA063-16-10    |
| Temperature Meter                   | RC-HT601A    | SA047-62       |

### GENERAL REMARK

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

When determining for test conclusion, measurement uncertainty of tests has been considered.

Throughout this report a ☐ comma ☒ point is used as the decimal separator.

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### TEST METHOD

#### Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IES LM-79

#### Light Distribution and Output Measurements

Light Distribution and total light output (luminous flux) were measured using a Go-R5000 Type-C Rotating Mirror Goniophotometer. Temperature 25°C and relative humidity of 60% was measured at a position in the testing laboratory.

The lamp rotates only around the fixed vertical axle in the prescribed burning position. The lamp and mirror permit the measurement of luminous intensity at the direction of any horizontal or vertical angle without tilting the lamp. The lamp was allowed to stabilize before measurements were made.

#### Chromaticity Measurements

Chromaticity was measured using a 2 meters integrating sphere spectral lamp measurement system, 4 $\pi$  geometry, with an interior coating reflectance no less than 95 %. Temperature was measured at a position inside the sphere shielded from direct light. Relative humidity of 65% was measured at a position in the testing laboratory.

Spectral radiant flux measurements were made using spectroradiometer attached to the detector port of the integrating sphere. Each lamp was allowed to stabilise before measurements were made. The calibration of the integrating sphere spectroradiometer system is by the reference/standard lamps which are traceable to National Institute of Metrology P.R. CHINA. Lamp efficacy (lumens per watt) for each lamp model was then computed based on the luminous flux result. Electrical measurements including voltage, power and power factor were measured using EVERFINE - Digital Power Meter., model PLM3000.

Correction factor (self-absorption) has been considered when doing measurement.

Standard lamp used for Goniophotometer method:

Model: D215S

Current: 4.809A DC

Standard lamp used for integrating sphere:

Model: 110V/100W

Current: 0.8851A

\*\*\*\*\* End of Page \*\*\*\*\*


## TEST REPORT

### RESULTS OF TESTS

**Test Condition: 120V, 60Hz For SLPC11830X**

Spectral Distribution over Visible Wavelengths

| nm  | mW/nm  | nm  | mW/nm  | nm  | mW/nm  | nm  | mW/nm  | nm  | mW/nm  |
|-----|--------|-----|--------|-----|--------|-----|--------|-----|--------|
| 380 | 0.0413 | 480 | 0.0090 | 580 | 0.0340 | 680 | 0.3503 | 780 | 0.9468 |
| 385 | 0.0360 | 485 | 0.0092 | 585 | 0.0390 | 685 | 0.3898 |     |        |
| 390 | 0.0352 | 490 | 0.0093 | 590 | 0.0437 | 690 | 0.4338 |     |        |
| 395 | 0.0250 | 495 | 0.0096 | 595 | 0.0512 | 695 | 0.4923 |     |        |
| 400 | 0.0271 | 500 | 0.0085 | 600 | 0.0585 | 700 | 0.5555 |     |        |
| 405 | 0.0188 | 505 | 0.0085 | 605 | 0.0654 | 705 | 0.6213 |     |        |
| 410 | 0.0233 | 510 | 0.0082 | 610 | 0.0735 | 710 | 0.6986 |     |        |
| 415 | 0.0157 | 515 | 0.0091 | 615 | 0.0817 | 715 | 0.7915 |     |        |
| 420 | 0.0209 | 520 | 0.0109 | 620 | 0.0931 | 720 | 0.8866 |     |        |
| 425 | 0.0142 | 525 | 0.0111 | 625 | 0.1048 | 725 | 0.9828 |     |        |
| 430 | 0.0160 | 530 | 0.0100 | 630 | 0.1179 | 730 | 1.0677 |     |        |
| 435 | 0.0132 | 535 | 0.0131 | 635 | 0.1325 | 735 | 1.1403 |     |        |
| 440 | 0.0129 | 540 | 0.0125 | 640 | 0.1481 | 740 | 1.2090 |     |        |
| 445 | 0.0127 | 545 | 0.0135 | 645 | 0.1651 | 745 | 1.2375 |     |        |
| 450 | 0.0125 | 550 | 0.0145 | 650 | 0.1850 | 750 | 1.2602 |     |        |
| 455 | 0.0109 | 555 | 0.0172 | 655 | 0.2039 | 755 | 1.2399 |     |        |
| 460 | 0.0119 | 560 | 0.0189 | 660 | 0.2277 | 760 | 1.1916 |     |        |
| 465 | 0.0093 | 565 | 0.0220 | 665 | 0.2559 | 765 | 1.1369 |     |        |
| 470 | 0.0098 | 570 | 0.0259 | 670 | 0.2817 | 770 | 1.0752 |     |        |
| 475 | 0.0107 | 575 | 0.0299 | 675 | 0.3145 | 775 | 1.0114 |     |        |

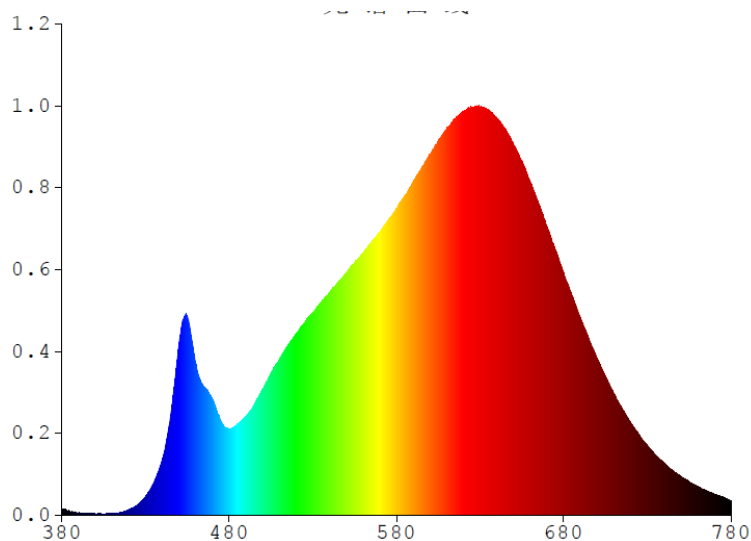

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### RESULTS OF TESTS (cont'd)

#### Test Condition: 120V, 60Hz For SLPC11830X

Total operation burning time: 60 minutes

Stabilization time: 45 minutes


#### Photometric Measurements at 25°C – Integrating Sphere Method

| Intertek<br>Sample<br>No. | Base<br>Orientation | Correlated<br>Color<br>Temperatur<br>e (K) | CRI | R9 | CIE 31'     | CIE 31'     | CIE 76'     | CIE 76'     |
|---------------------------|---------------------|--------------------------------------------|-----|----|-------------|-------------|-------------|-------------|
|                           |                     |                                            |     |    | Chromaticit | Chromaticit | Chromaticit | Chromaticit |
|                           |                     |                                            |     |    | y           | y           | y           | y           |
|                           |                     |                                            |     |    | Coordinate  | Coordinate  | Coordinate  | Coordinate  |
|                           |                     |                                            |     |    | (x)         | (y)         | (u')        | (v')        |
| SLPC11830X                |                     |                                            |     |    |             |             |             |             |
| S2302231<br>04-003        | --                  | 2810                                       | 94  | 69 | 0.4480      | 0.4027      | 0.2584      | 0.5225      |

#### Photometric and Electrical Measurements at 25°C – Distribution Method

| Intertek<br>Sample<br>No. | Base<br>Orientation | Input<br>Voltage<br>(Vac) | Input<br>Current<br>(mA) | Input<br>Power<br>(Watts) | Input<br>Power<br>Factor | Absolute                     | Lumen                            |
|---------------------------|---------------------|---------------------------|--------------------------|---------------------------|--------------------------|------------------------------|----------------------------------|
|                           |                     |                           |                          |                           |                          | Luminous<br>Flux<br>(Lumens) | Efficacy<br>(Lumens<br>Per Watt) |
| SLPC11830X                |                     |                           |                          |                           |                          |                              |                                  |
| S2302231<br>04-003        | --                  | 120.2                     | 157.5                    | 18.8                      | 0.991                    | 711.3                        | 37.9                             |

#### Intensity (Candlepower) Summary at 25°C – Candelas

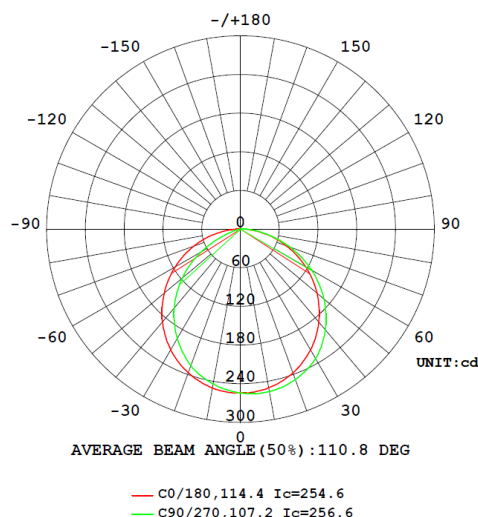

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### RESULTS OF TESTS (cont'd)

**Test Condition: 120V, 60Hz For SLPC11830X**

Intensity (Candlepower) Summary at 25°C - Candelas

| V \<br>H(°) | 0     | 22.5  | 45    | 67.5  | 90    |
|-------------|-------|-------|-------|-------|-------|
| 0           | 254.4 | 254.4 | 254.4 | 254.4 | 254.4 |
| 5           | 253.4 | 254.5 | 255.4 | 256.0 | 256.5 |
| 10          | 250.2 | 252.4 | 254.2 | 255.6 | 256.0 |
| 15          | 244.9 | 247.9 | 250.7 | 252.6 | 253.4 |
| 20          | 237.4 | 241.4 | 245.0 | 247.3 | 248.4 |
| 25          | 227.9 | 233.0 | 237.3 | 240.0 | 241.4 |
| 30          | 216.6 | 222.5 | 227.5 | 230.8 | 232.2 |
| 35          | 203.4 | 210.2 | 215.9 | 218.9 | 219.5 |
| 40          | 188.4 | 196.0 | 202.4 | 203.7 | 204.1 |
| 45          | 172.0 | 180.1 | 185.6 | 186.5 | 187.1 |
| 50          | 154.4 | 163.0 | 167.2 | 167.8 | 168.5 |
| 55          | 135.7 | 144.7 | 147.3 | 147.9 | 148.4 |
| 60          | 116.1 | 125.0 | 126.2 | 126.6 | 126.9 |
| 65          | 95.9  | 103.8 | 104.5 | 104.2 | 104.4 |
| 70          | 75.2  | 81.9  | 81.8  | 81.2  | 81.3  |
| 75          | 54.8  | 59.9  | 59.1  | 57.7  | 58.3  |
| 80          | 34.8  | 38.4  | 37.3  | 37.2  | 37.7  |
| 85          | 15.4  | 17.3  | 18.0  | 19.2  | 19.7  |
| 90          | 0.2   | 1.6   | 3.8   | 4.5   | 5.3   |
| 95          | 0.1   | 0.1   | 0.1   | 0.1   | 0.1   |
| 100         | 0.1   | 0.1   | 0.1   | 0.1   | 0.0   |
| 105         | 0.1   | 0.1   | 0.1   | 0.1   | 0.1   |
| 110         | 0.1   | 0.1   | 0.1   | 0.1   | 0.1   |
| 115         | 0.1   | 0.2   | 0.1   | 0.1   | 0.1   |
| 120         | 0.2   | 0.2   | 0.1   | 0.1   | 0.1   |
| 125         | 0.2   | 0.2   | 0.2   | 0.1   | 0.1   |
| 130         | 0.2   | 0.2   | 0.2   | 0.2   | 0.2   |
| 135         | 0.3   | 0.3   | 0.2   | 0.2   | 0.2   |
| 140         | 0.3   | 0.3   | 0.3   | 0.3   | 0.3   |
| 145         | 0.3   | 0.3   | 0.3   | 0.3   | 0.3   |
| 150         | 0.4   | 0.4   | 0.4   | 0.3   | 0.3   |
| 155         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |
| 160         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |
| 165         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |
| 170         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |
| 175         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |
| 180         | 0.4   | 0.4   | 0.4   | 0.4   | 0.4   |

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### RESULTS OF TESTS (cont'd)

**Test Condition: 120V, 60Hz For SLPC11830X**

#### Zonal Lumen Summary and Percentages at 25°C

| Zone       | Lumens (lm) | % Luminaire (%) |
|------------|-------------|-----------------|
| SLPC11830X |             |                 |
| 0-30       | 197.8       | 27.8            |
| 0-40       | 323.7       | 45.5            |
| 0-60       | 568.3       | 79.9            |
| 0-90       | 710.0       | 99.8            |
| 60-90      | 141.7       | 19.9            |
| 0-180      | 711.3       | 100.0           |

#### Beam Angle

**Total Beam Angle (°)**


110.8

#### Illumination Plots

Model No.: SLPC11830X

Mount Height: 2.5 m

#### Illuminance - Cone of Light

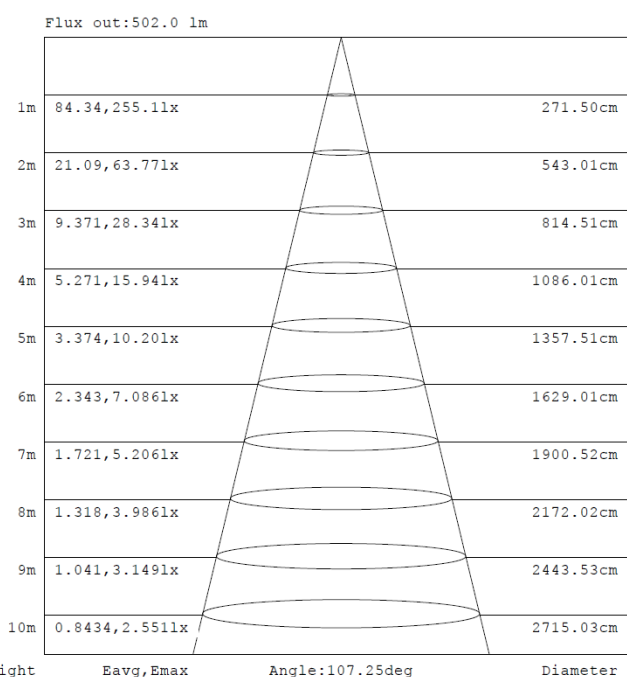

\*\*\*\*\* End of Page \*\*\*\*\*

# TEST REPORT


## RESULTS OF TESTS (cont'd)

**Test Condition: 120V, 60Hz For SLPC11830X**

Model No.: SLPC11830X

Mount Height: 2.5 m

Isoillumination Plot

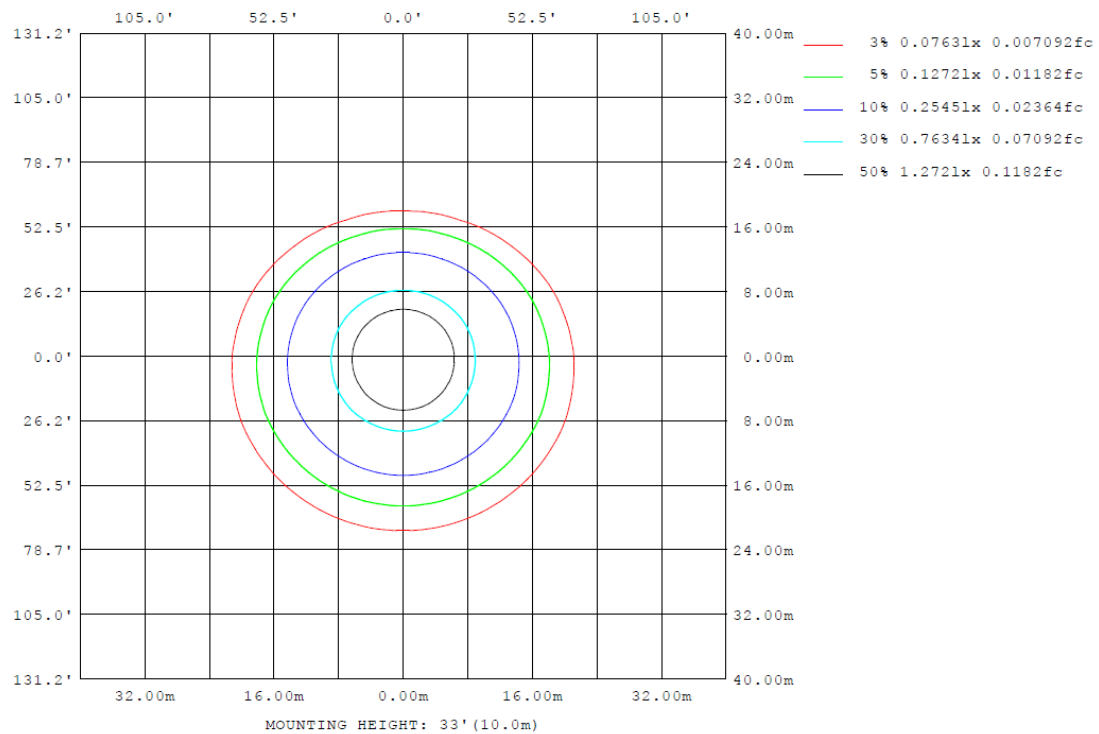

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For SLPC11830X







#### ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: Visual Comfort and Company

Date: 2023/2/25

Model: SLPC11830X

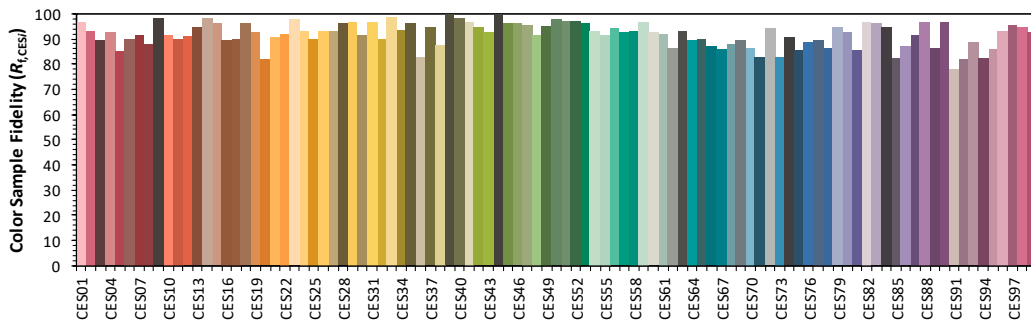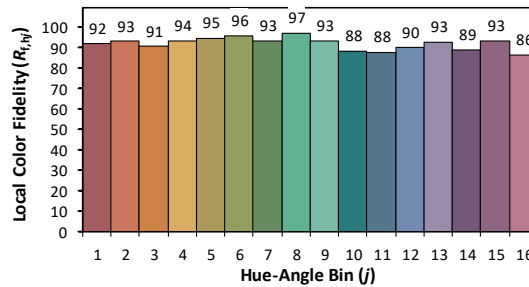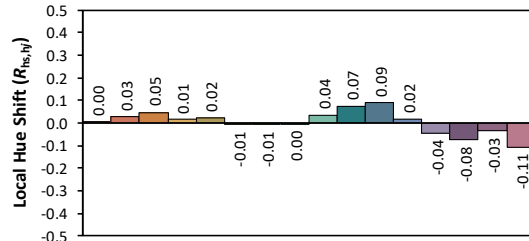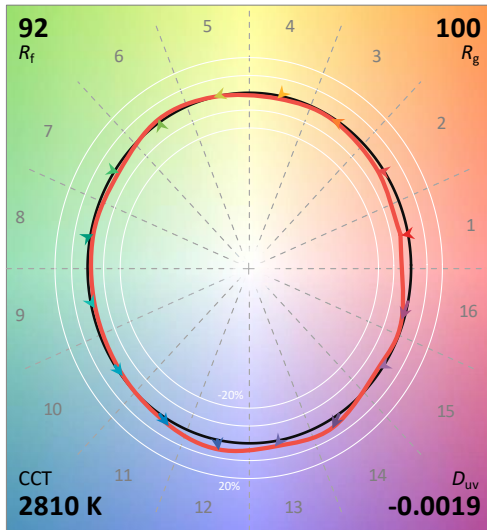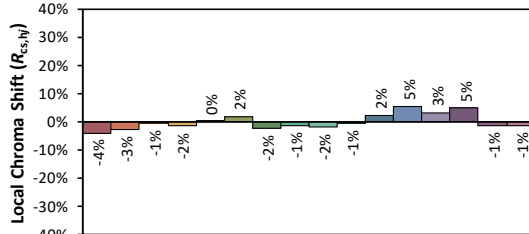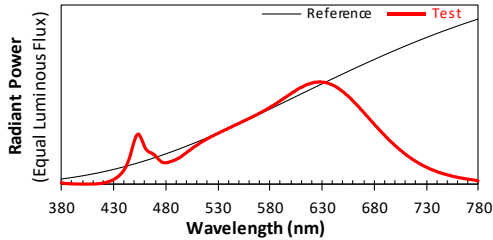

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

$x$  0.4480  
 $y$  0.4027  
 $u'$  0.2584  
 $v'$  0.5225

CIE 13.3-1995  
(CRI)


$R_a$  94  
 $R_g$  69

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.


\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### PRODUCT PICTURE (not to scale)

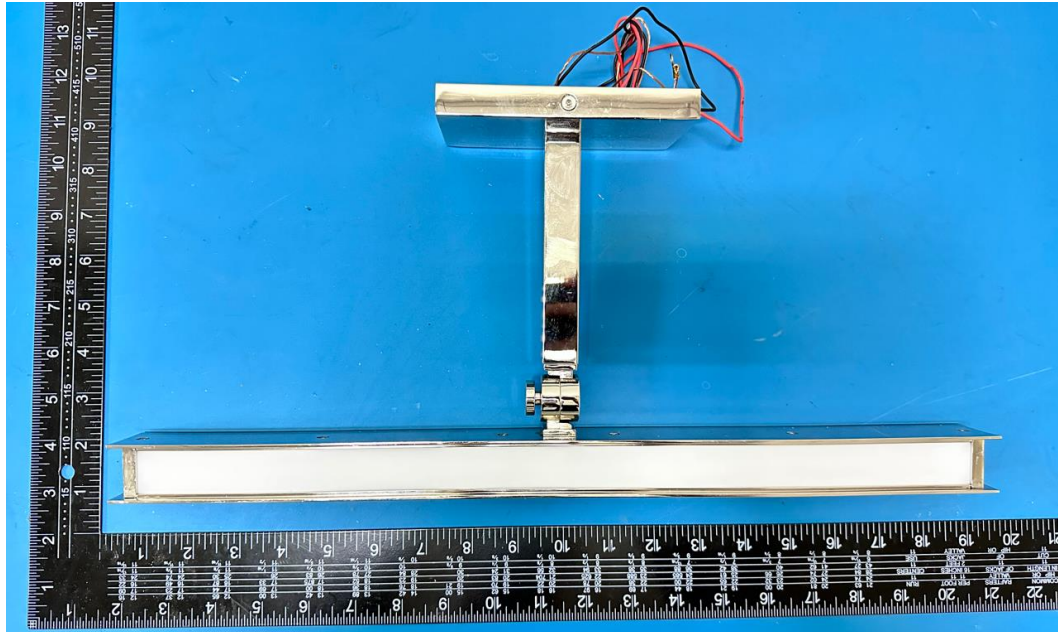

**External view of SLPC11830X**

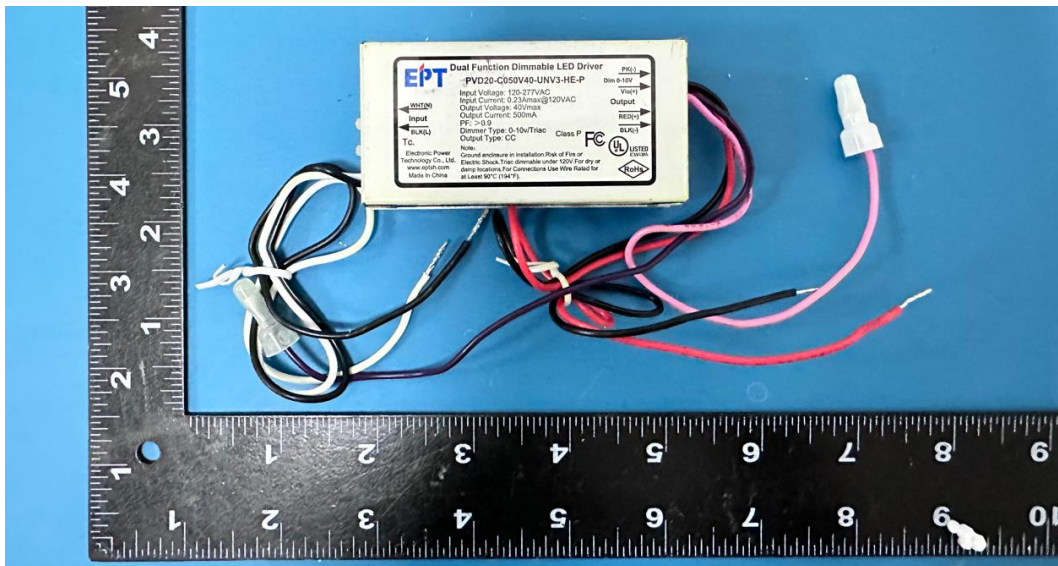

**View of LED Driver PVD20-C050V40-UNV3-HE-P**

\*\*\*\*\* End of Page \*\*\*\*\*

## TEST REPORT

### PRODUCT PICTURE (not to scale)



View of LED

In Charge Of Tests:

*Done Ye*

Done Ye  
Engineer

Report Reviewed By

*Shelley Ying*

Shelley Ying  
Reviewer

Attachment: None

\*\*\*\*\* End of Report \*\*\*\*\*