

VISUAL COMFORT & Co.

Light efficiency:


94 Lumen/Watt

Output: 582 lm

Peak: 190 cd

Power: 6.2 W

PF: 1.0

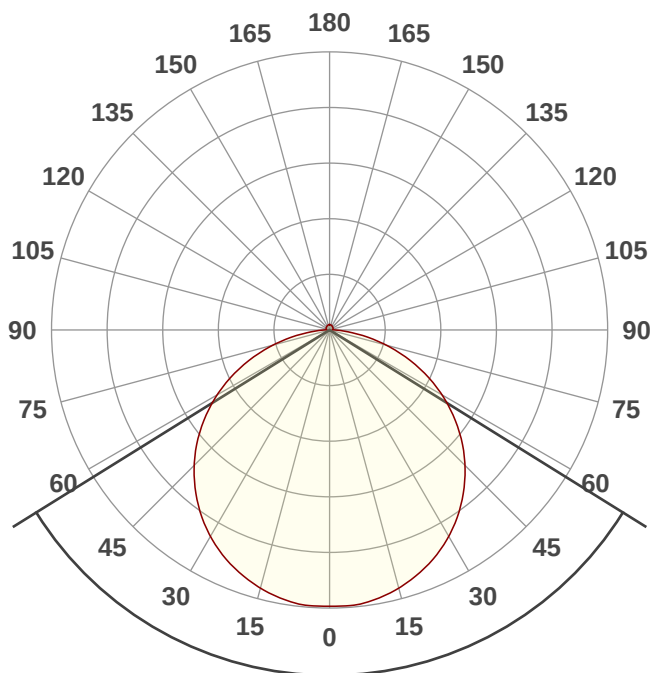

Product name:

TR1045 AB1228-01


Date and time:

12/8/2022 3:41:55 PM

116.2°

Beam angle

Power

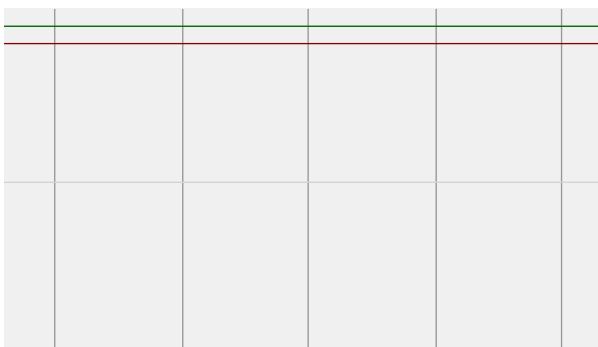


Voltage: 24.0 V

Current: 0.259 A

ISO Diagrams

ISO candela diagram

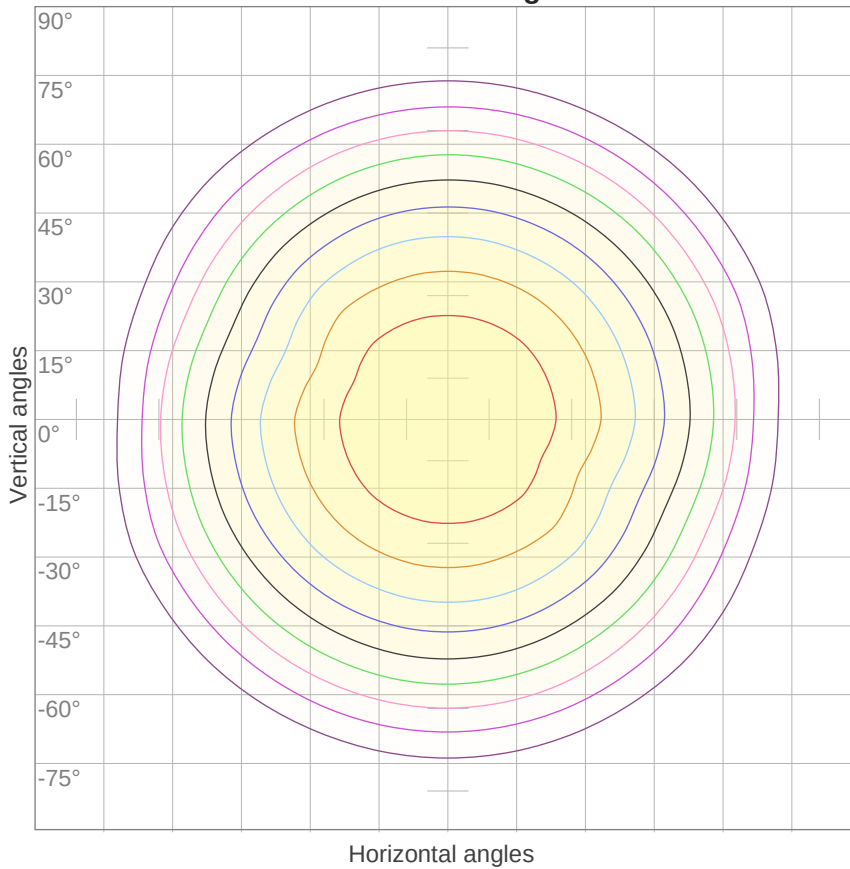


10%	19 cd
20%	38 cd
30%	57 cd
40%	76 cd
50%	95 cd
60%	114 cd
70%	132 cd
80%	151 cd
90%	170 cd

Conditions:

Number of c-planes: 16

Candela at center: 189 cd

ISO lux diagram

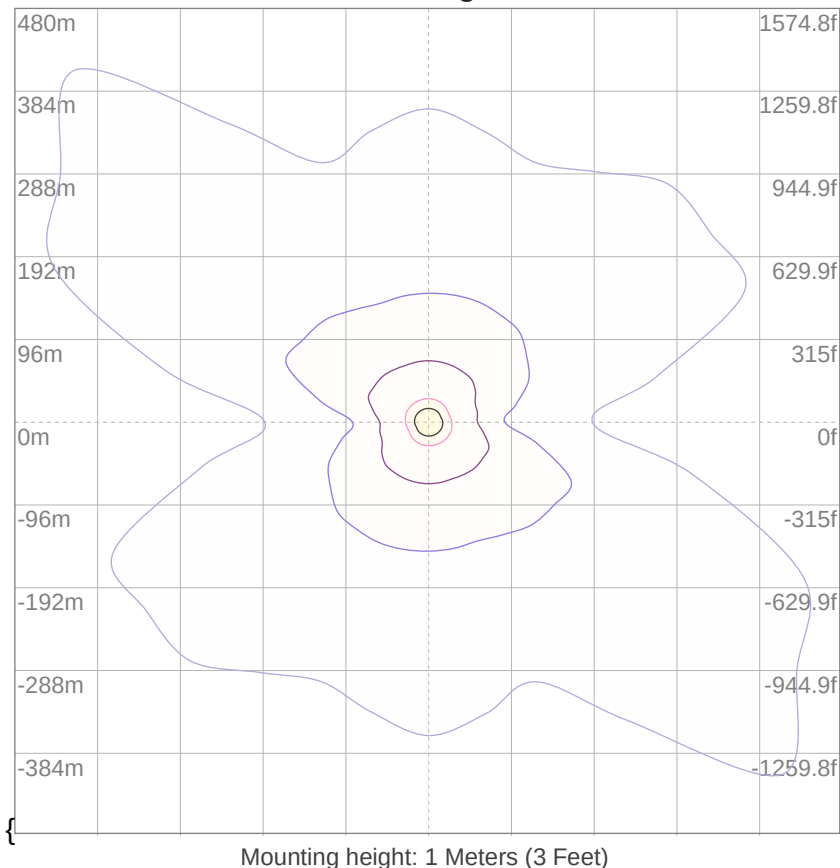

3%	6 lx
5%	9 lx
10%	19 lx
30%	57 lx
50%	95 lx

Conditions:

Number of c-planes: 16

Lux at center: 189 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*