

# VISUAL COMFORT & Co.

Light efficiency:


97 Lumen/Watt

Output: 603 lm

Peak: 195 cd

Power: 6.2 W

PF: 1.0

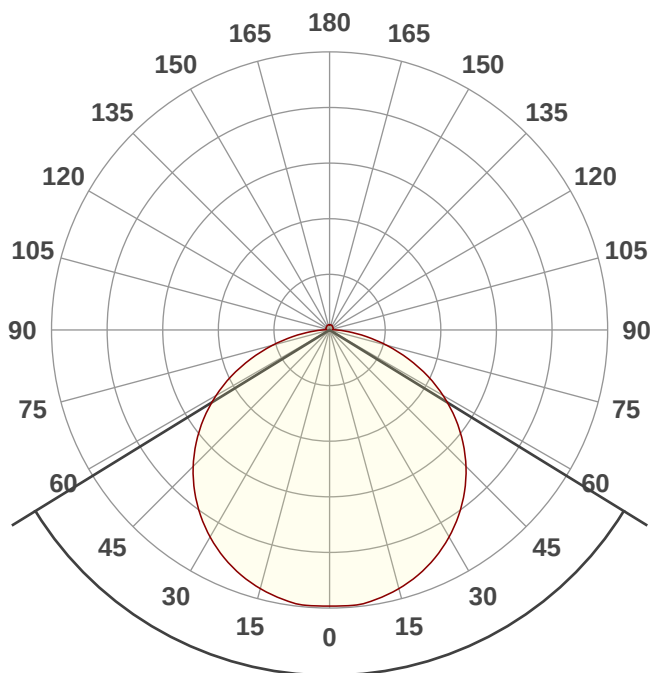

Product name:

TR1045 AB1228-02


Date and time:

12/12/2022 9:48:56 AM

116.8°

Beam angle

Power

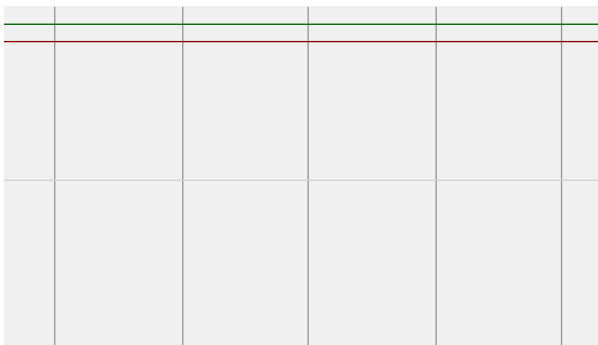


Voltage: 24.0 V

Current: 0.258 A

## ISO Diagrams

ISO candela diagram

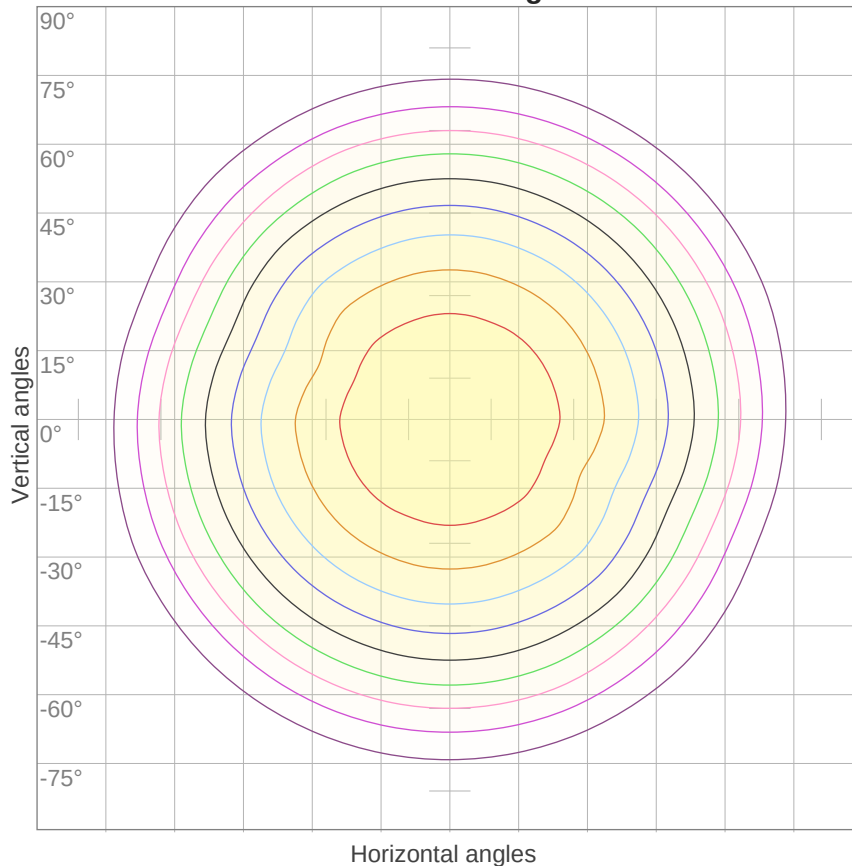


|     |        |
|-----|--------|
| 10% | 19 cd  |
| 20% | 39 cd  |
| 30% | 58 cd  |
| 40% | 78 cd  |
| 50% | 97 cd  |
| 60% | 116 cd |
| 70% | 136 cd |
| 80% | 155 cd |
| 90% | 175 cd |

Conditions:

Number of c-planes: 16

Candela at center: 194 cd

ISO lux diagram

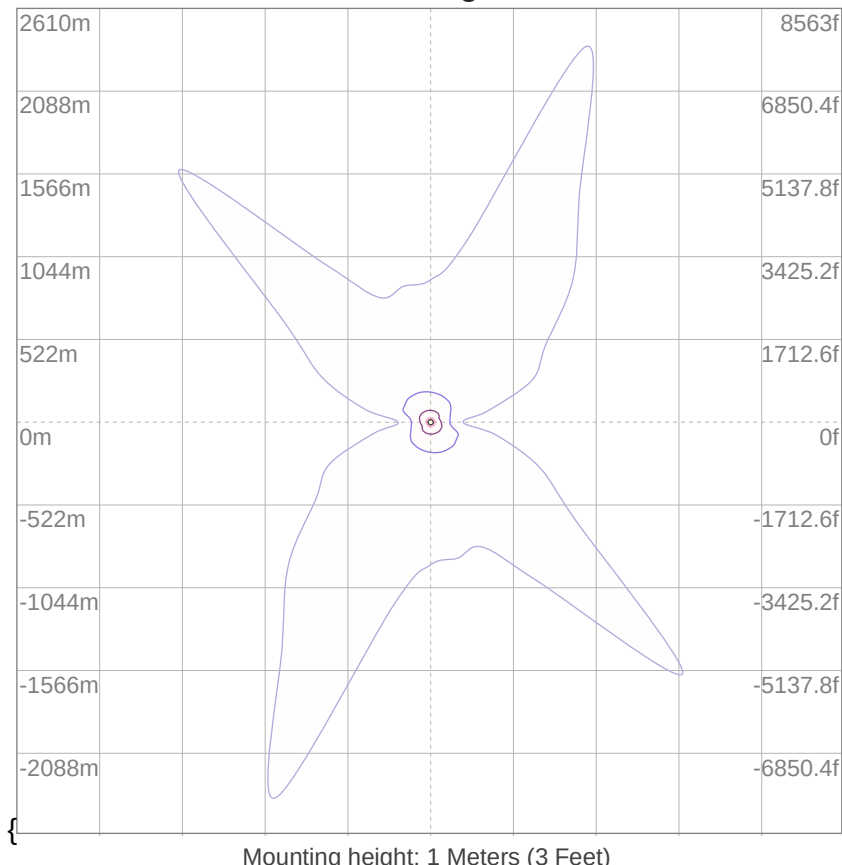

|     |       |
|-----|-------|
| 3%  | 6 lx  |
| 5%  | 10 lx |
| 10% | 19 lx |
| 30% | 58 lx |
| 50% | 97 lx |

Conditions:

Number of c-planes: 16

Lux at center: 194 lx

*Lux distribution on a surface  
when lamp is mounted at 1  
meter from the surface.*