

VISUAL COMFORT & Co.

Light efficiency:


86 Lumen/Watt

Output: 1094 lm

Peak: 356 cd

Power: 12.7 W

PF: 1.0

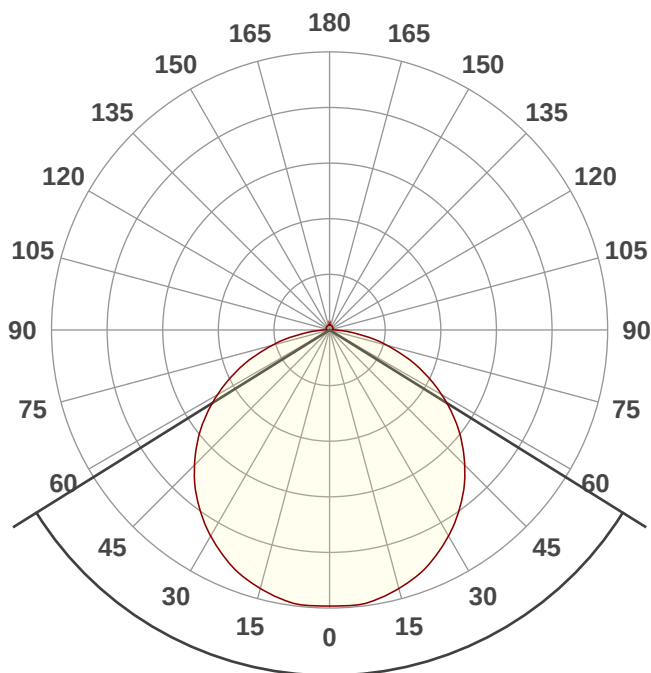

Product name:

TR1045 AB1229-01


Date and time:

12/8/2022 1:55:10 PM

116.1°

Beam angle

Power

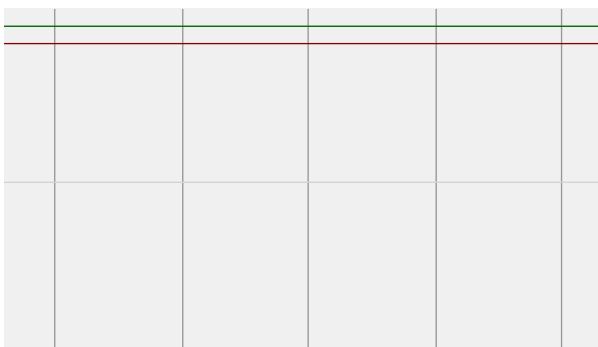


Voltage: 24.0 V

Current: 0.528 A

VISUAL COMFORT & Co.

ISO Diagrams

ISO candela diagram

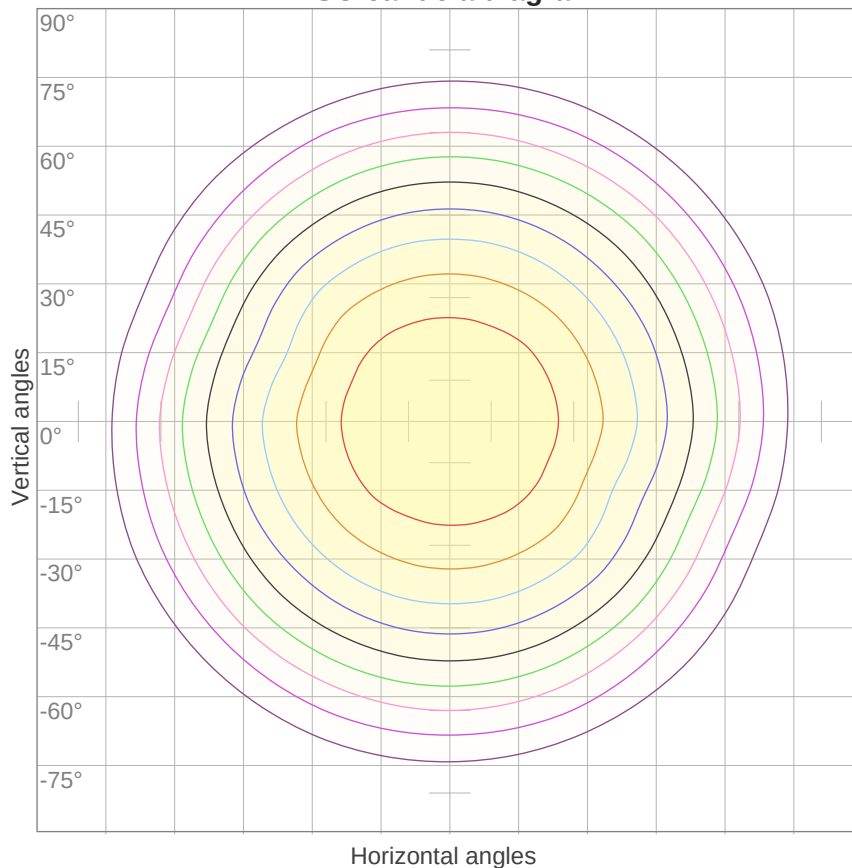


10%	35 cd
20%	71 cd
30%	106 cd
40%	142 cd
50%	177 cd
60%	213 cd
70%	248 cd
80%	284 cd
90%	319 cd

Conditions:

Number of c-planes: 16

Candela at center: 355 cd

ISO lux diagram

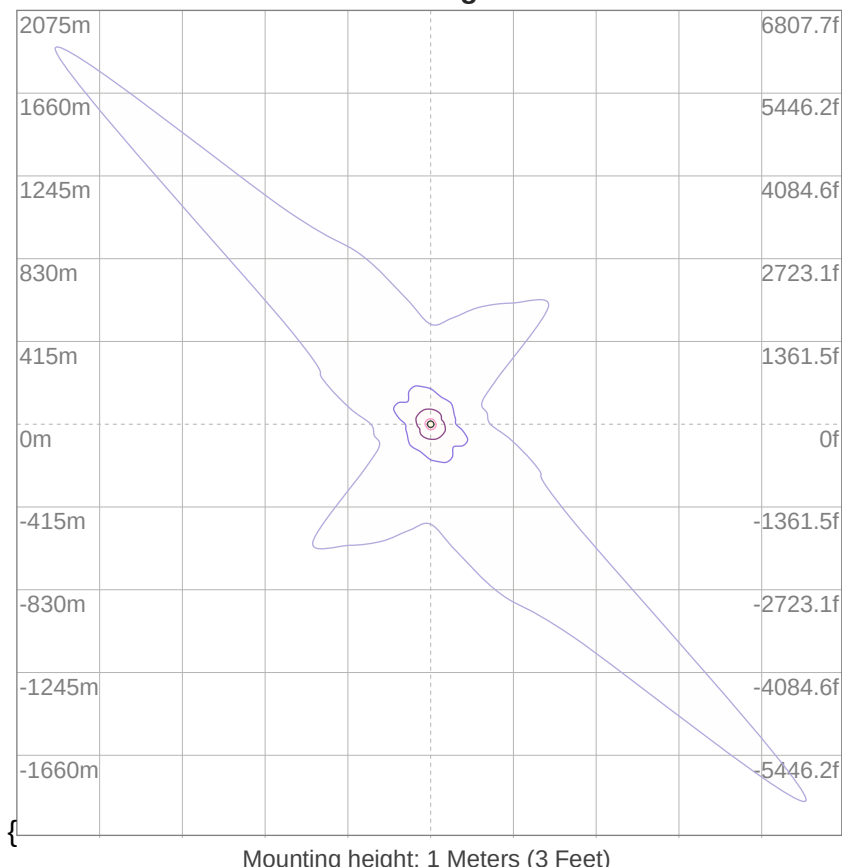

3%	11 lx
5%	18 lx
10%	35 lx
30%	106 lx
50%	177 lx

Conditions:

Number of c-planes: 16

Lux at center: 355 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*