

VISUAL COMFORT & Co.

Light efficiency:


90 Lumen/Watt

Output: 1018 lm

Peak: 329 cd

Power: 11.3 W

PF: 1.0

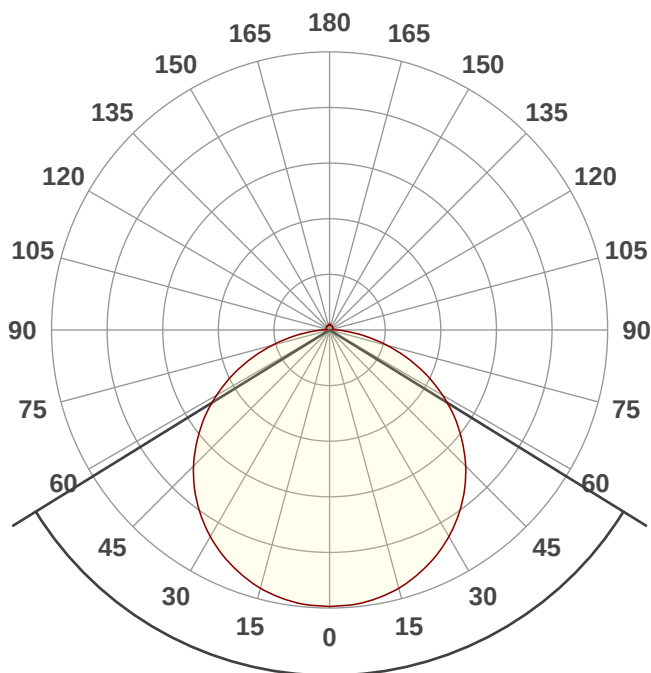

Product name:

TR1045 AB1229-02


Date and time:

12/9/2022 10:55:57 AM

116.5°

Beam angle

Power

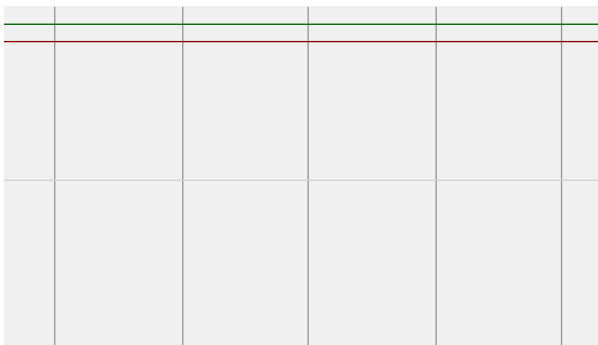


Voltage: 24.0 V

Current: 0.471 A

ISO Diagrams

ISO candela diagram

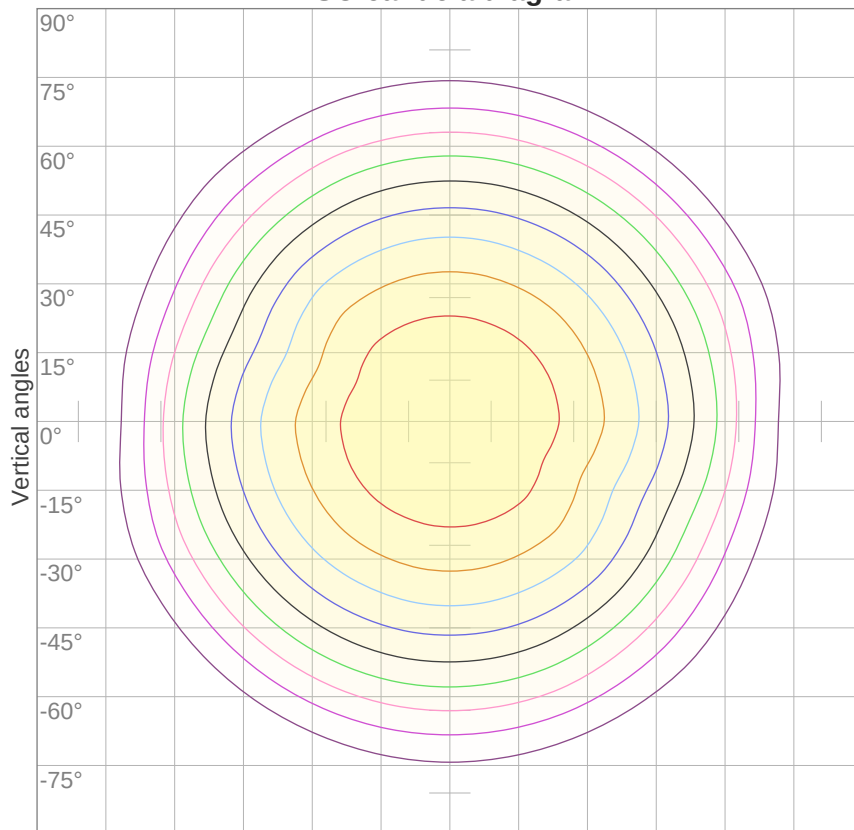


10%	33 cd
20%	66 cd
30%	99 cd
40%	132 cd
50%	164 cd
60%	197 cd
70%	230 cd
80%	263 cd
90%	296 cd

Conditions:

Number of c-planes: 16

Candela at center: 329 cd

ISO lux diagram

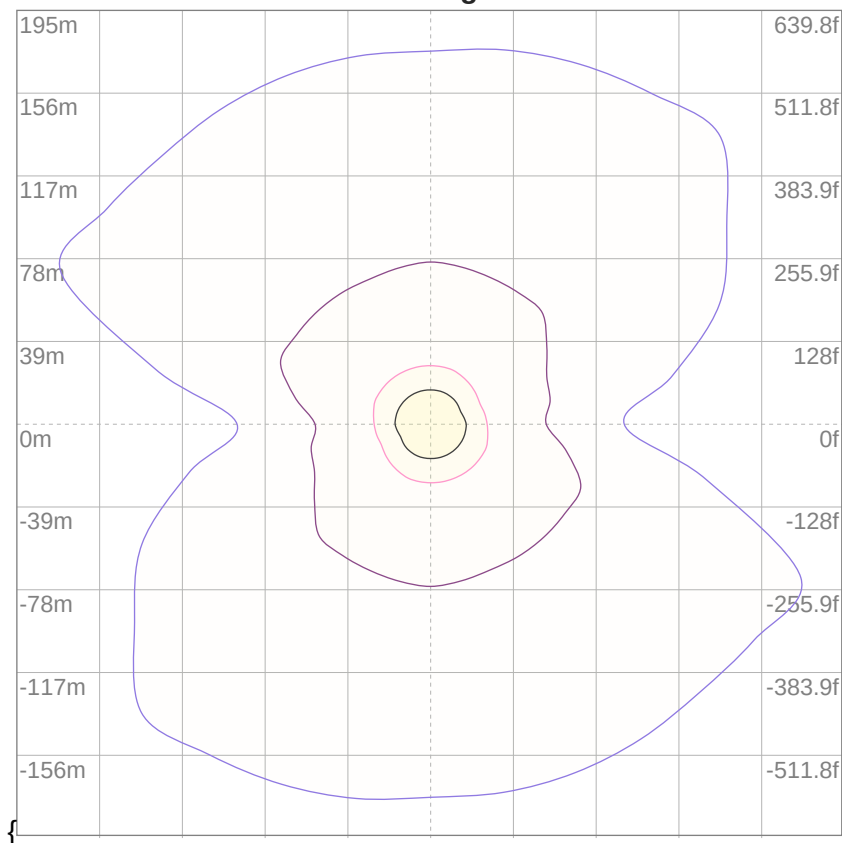

3%	10 lx
5%	16 lx
10%	33 lx
30%	99 lx
50%	164 lx

Conditions:

Number of c-planes: 16

Lux at center: 329 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*

Mounting height: 1 Meters (3 Feet)