

VISUAL COMFORT & Co.

Light efficiency:


80 Lumen/Watt

Output: 1481 lm

Peak: 486 cd

Power: 18.6 W

PF: 1.0

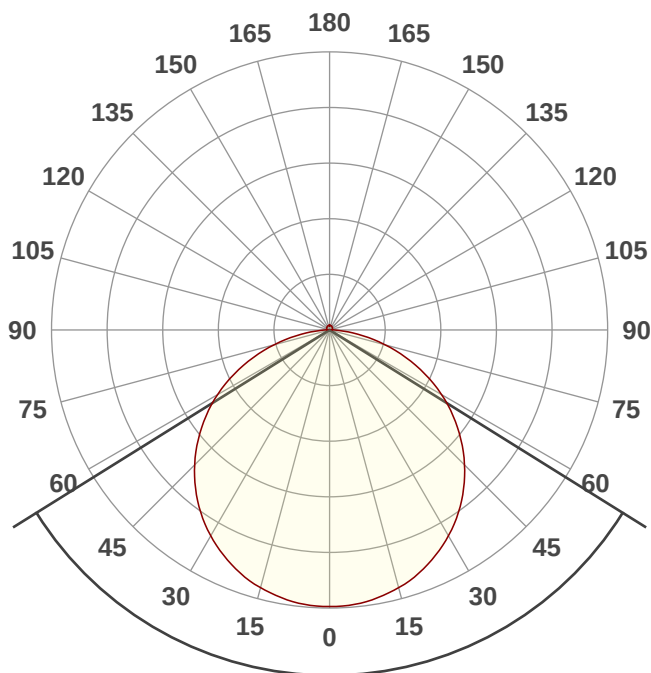

Product name:

TR1045 AB1230-01


Date and time:

12/8/2022 12:22:52 PM

116.1°

Beam angle

Power

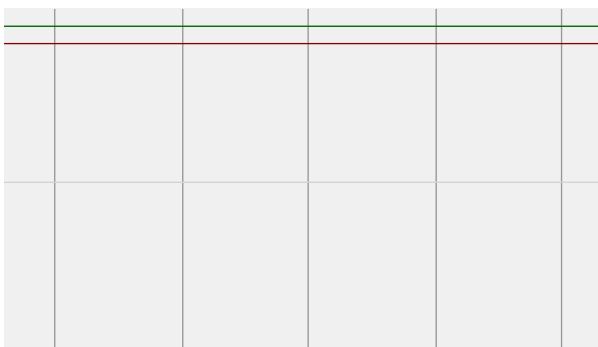


Voltage: 24.0 V

Current: 0.775 A

ISO Diagrams

ISO candela diagram

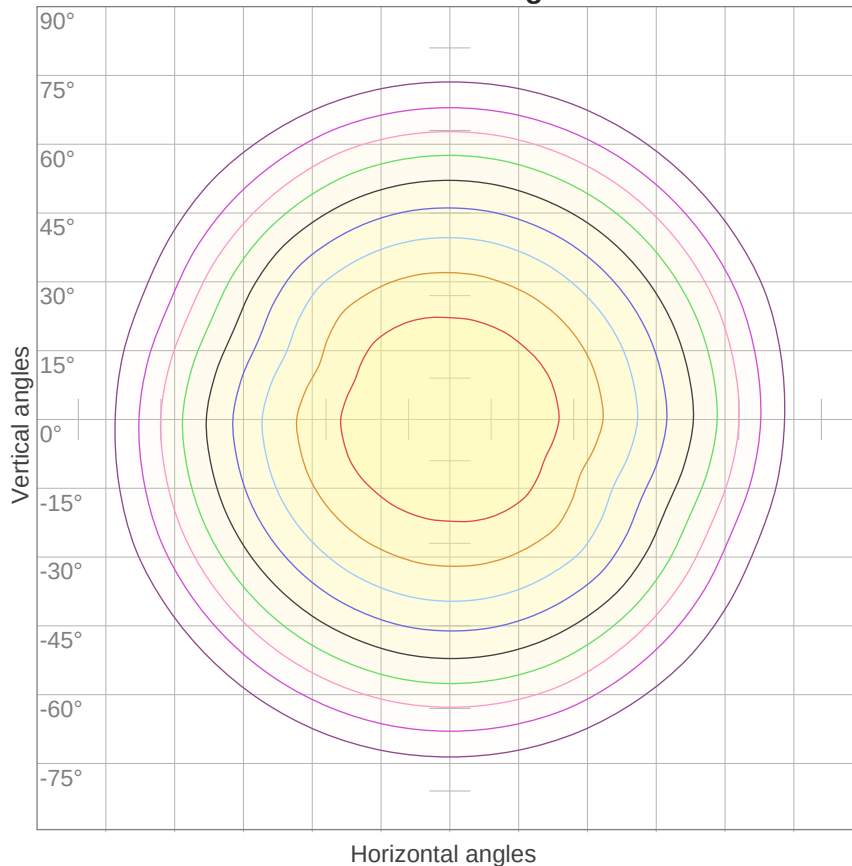


10%	48 cd
20%	97 cd
30%	145 cd
40%	194 cd
50%	242 cd
60%	290 cd
70%	339 cd
80%	387 cd
90%	436 cd

Conditions:

Number of c-planes: 16

Candela at center: 484 cd

ISO lux diagram

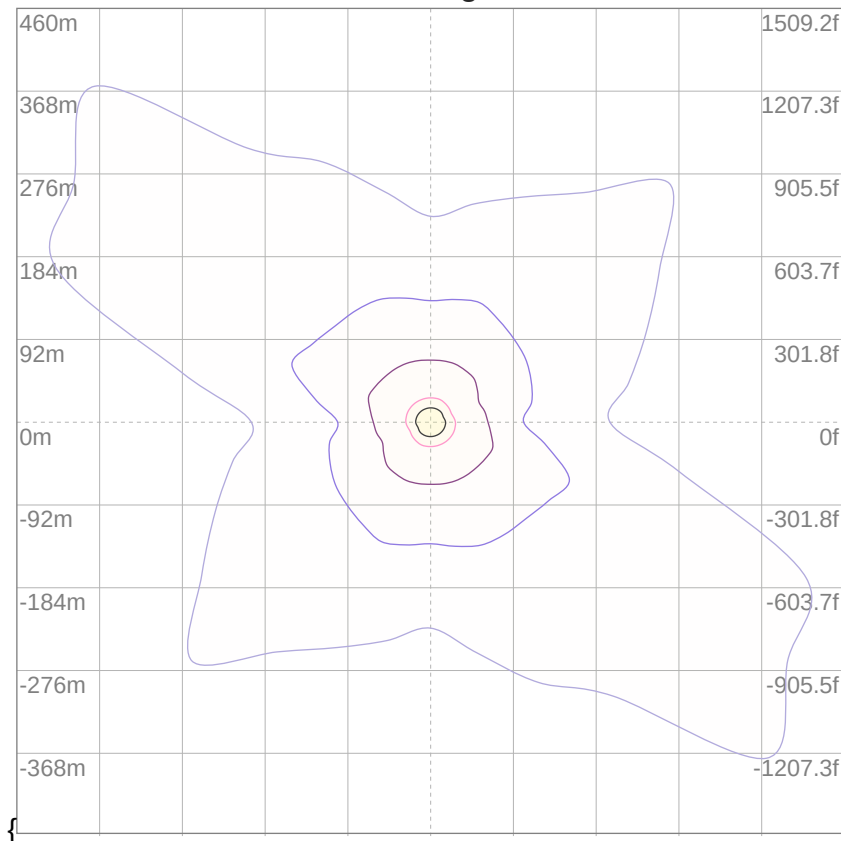

3%	15 lx
5%	24 lx
10%	48 lx
30%	145 lx
50%	242 lx

Conditions:

Number of c-planes: 16

Lux at center: 484 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*