

VISUAL COMFORT & Co.

Light efficiency:


86 Lumen/Watt

Output: 1653 lm

Peak: 537 cd

Power: 19.2 W

PF: 1.0

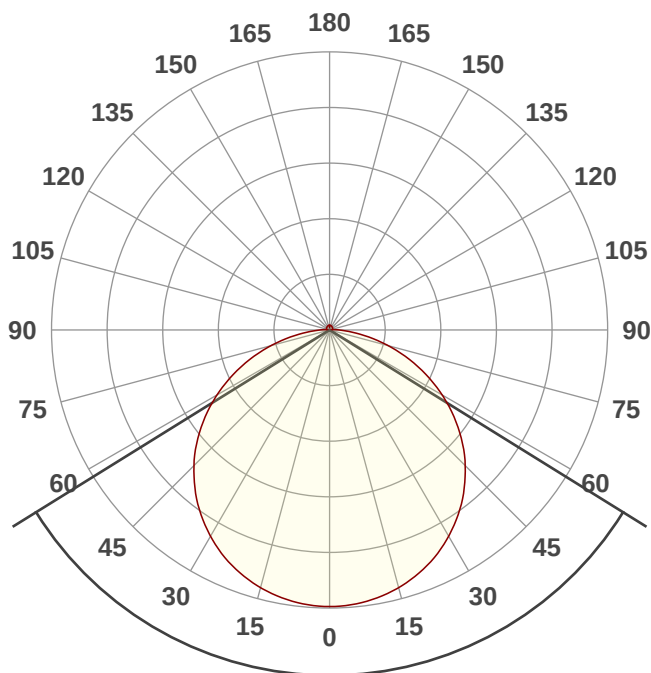

Product name:

TR1045 AB1230-03


Date and time:

12/12/2022 10:39:42 AM

116.3°

Beam angle

Power

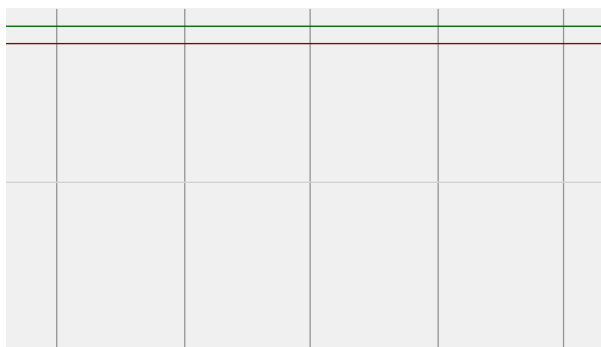


Voltage: 24.0 V

Current: 0.802 A

ISO Diagrams

ISO candela diagram

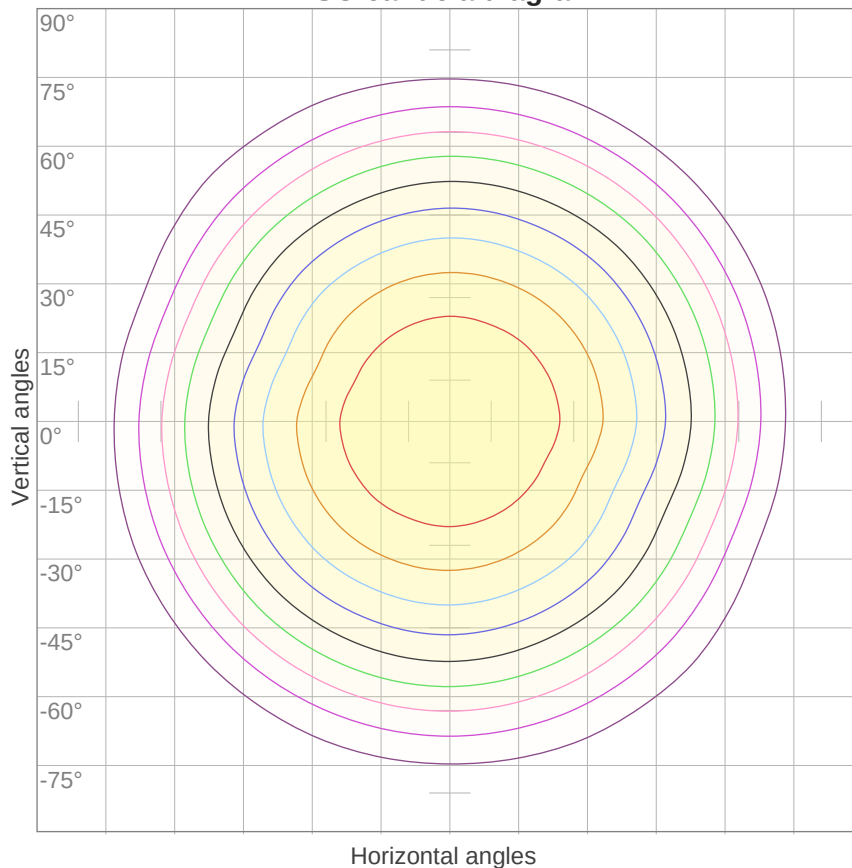


10%	54 cd
20%	107 cd
30%	161 cd
40%	214 cd
50%	268 cd
60%	321 cd
70%	375 cd
80%	429 cd
90%	482 cd

Conditions:

Number of c-planes: 16

Candela at center: 536 cd

ISO lux diagram

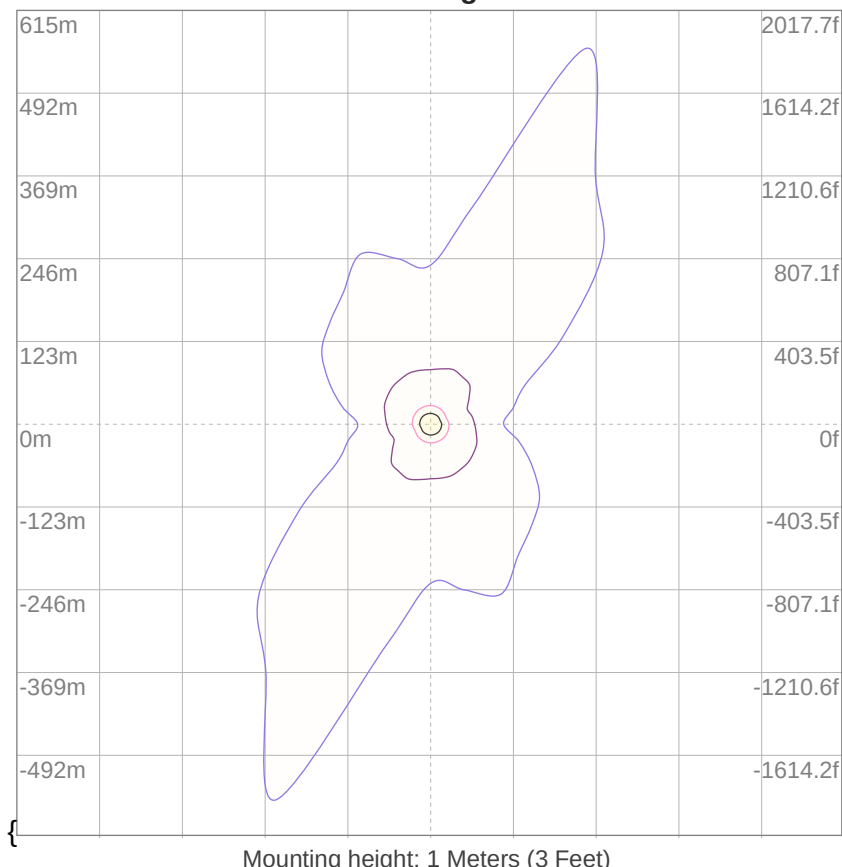

3%	16 lx
5%	27 lx
10%	54 lx
30%	161 lx
50%	268 lx

Conditions:

Number of c-planes: 16

Lux at center: 536 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*