

VISUAL COMFORT & Co.

Light efficiency:

92 Lumen/Watt

Output: 1589 lm

Peak: 545 cd

Power: 17.3 W

PF: 1.0

No photo

Tracking number: [n/a](#)

Product name:


AA8635-04

Item number:

Date and time:

9/21/2022 9:00:36 AM


Description:

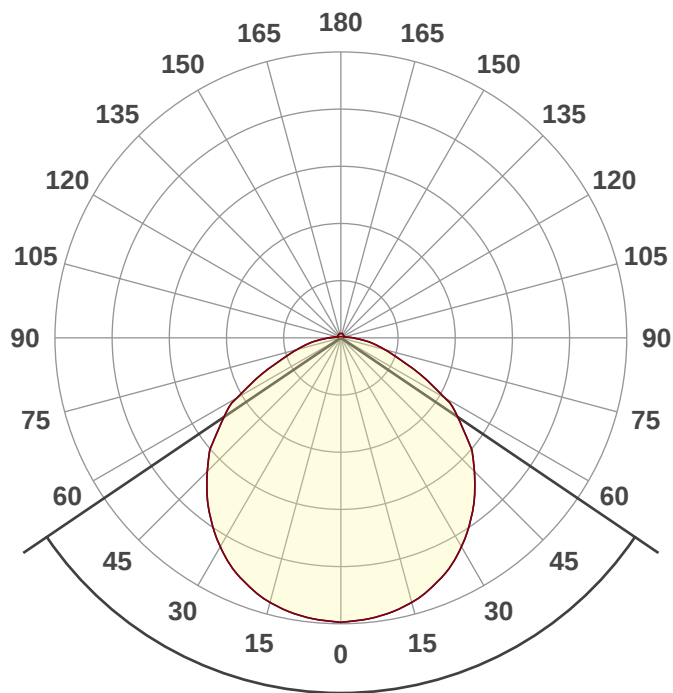

Beam angle

111.8°

Power

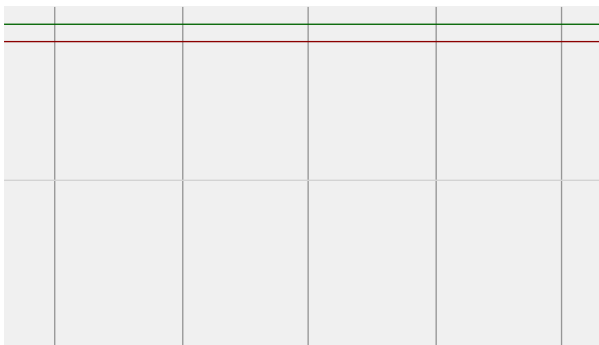

Voltage: 24.0 V


Current: 0.720 A

Frequency: 0 Hz

VISUAL COMFORT & Co.

ISO Diagrams

ISO candela diagram

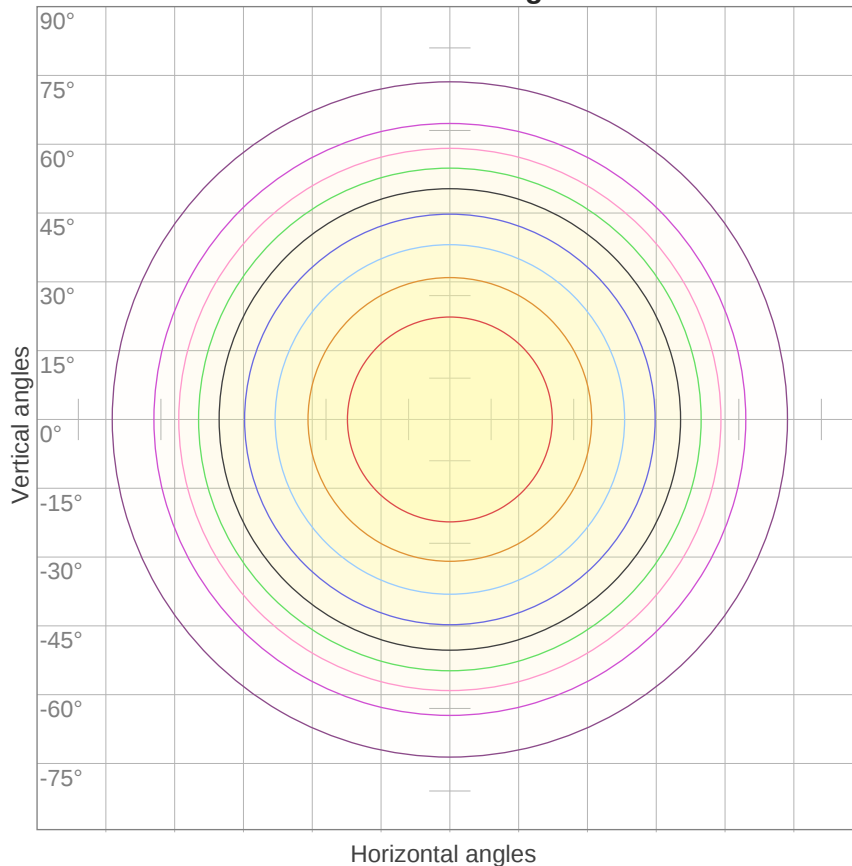


10%	54 cd
20%	107 cd
30%	161 cd
40%	214 cd
50%	268 cd
60%	321 cd
70%	375 cd
80%	428 cd
90%	482 cd

Conditions:

Number of c-planes: 12

Candela at center: 535 cd

ISO lux diagram

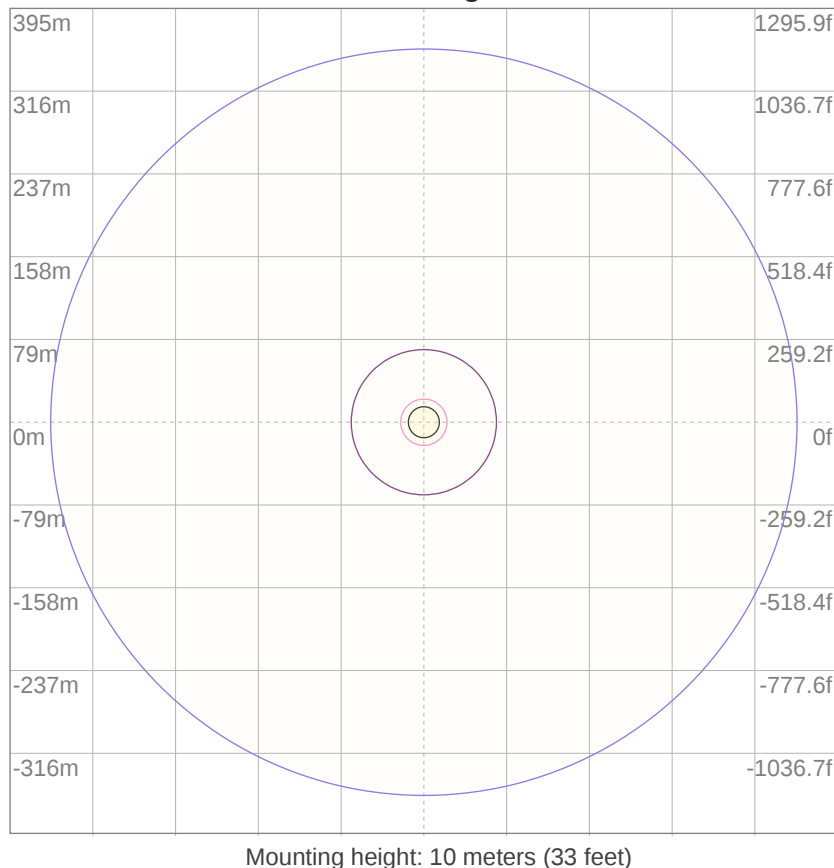

3%	0.161 lx
5%	0.268 lx
10%	0.535 lx
30%	1.61 lx
50%	2.68 lx

Conditions:

Number of c-planes: 12

Lux at center: 5.35 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*