

VISUAL COMFORT & Co.

Light efficiency:

88 Lumen/Watt

Output: 1215 lm

Peak: 417 cd

Power: 13.8 W

PF: 1.0

No photo

Tracking number: [n/a](#)

Product name:


AA8636-01

Item number:

Date and time:

9/21/2022 3:16:40 PM


Description:

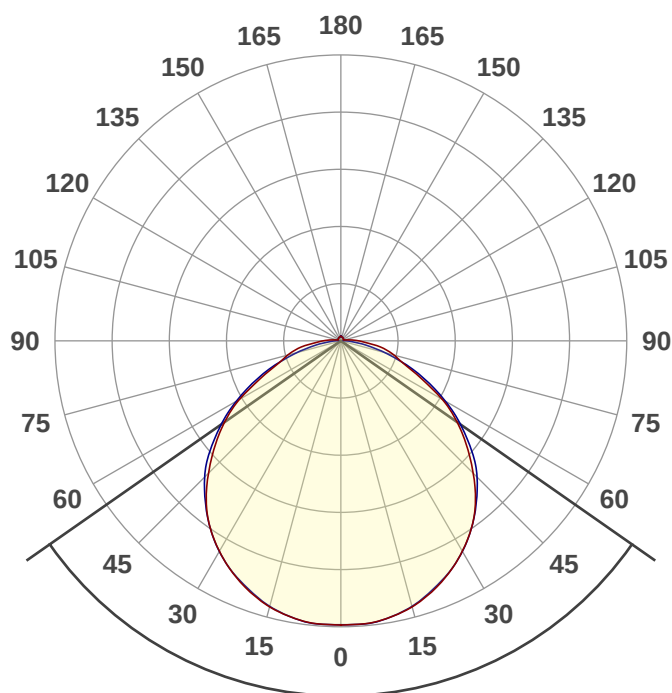

Beam angle

110.1°

Power

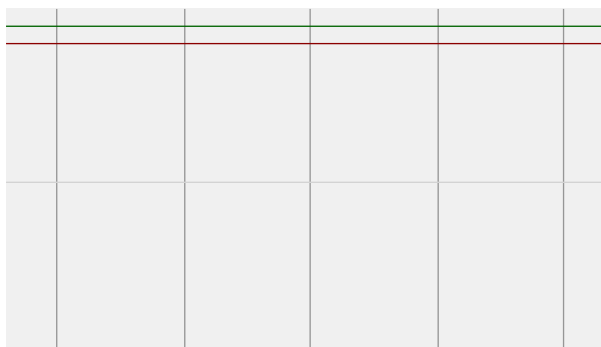


Voltage: 24.0 V

Current: 0.573 A

Frequency: 0 Hz

ISO Diagrams

ISO candela diagram

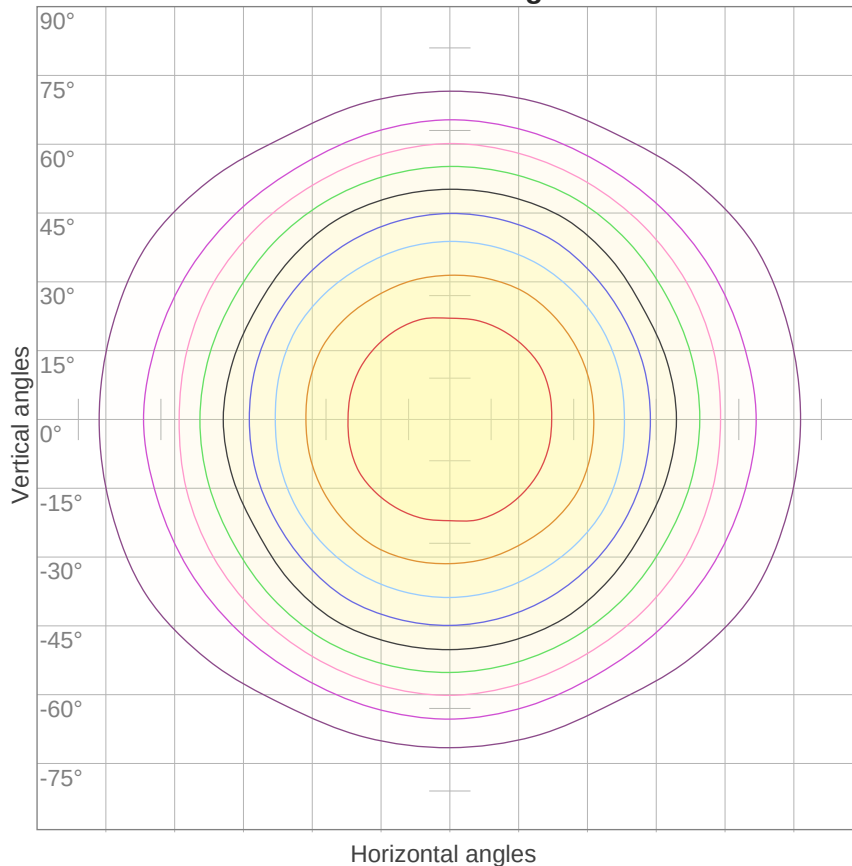


10%	42 cd
20%	83 cd
30%	125 cd
40%	166 cd
50%	208 cd
60%	249 cd
70%	291 cd
80%	332 cd
90%	374 cd

Conditions:

Number of c-planes: 12

Candela at center: 415 cd

ISO lux diagram

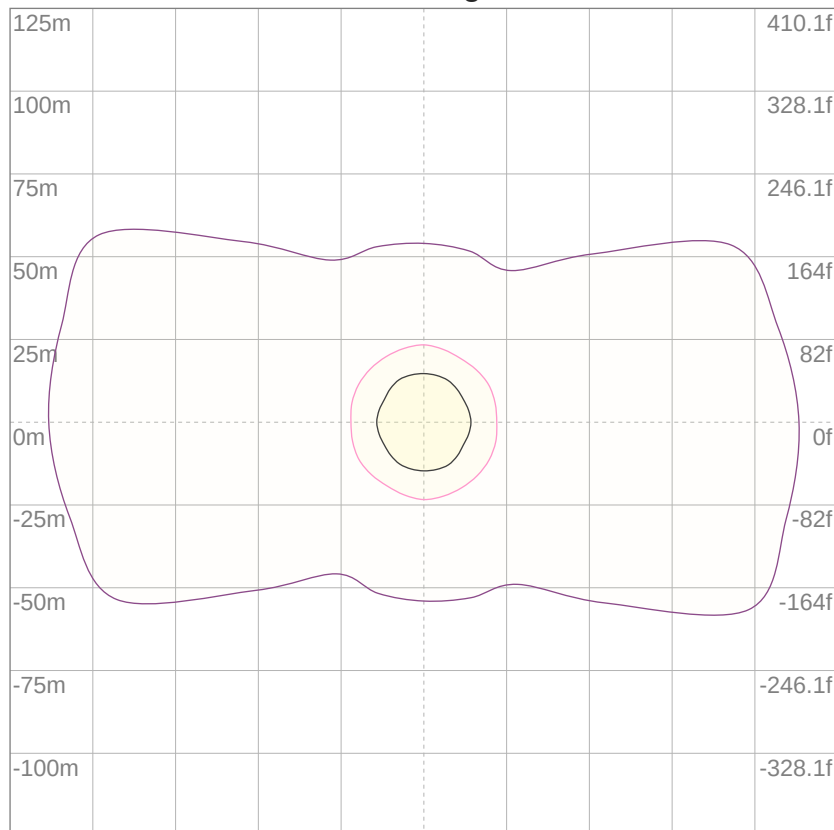

3%	0.125 lx
5%	0.208 lx
10%	0.415 lx
30%	1.25 lx
50%	2.08 lx

Conditions:

Number of c-planes: 12

Lux at center: 4.15 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*