

GENERATION BRANDS, LLC TEST REPORT

SCOPE OF WORK

LED Performance Testing

MODEL NUMBER

ESSF0604P48300930WW1

PROJECT NUMBER

G104349704

REPORT NUMBER

10434974CHI-024

ISSUE DATE

8/17/2020

REVISED DATE

8/26/2020

TEST DATES

08/14/2020.

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



REPORT NUMBER

10434974CHI-024

MODEL NUMBER(s)

ESSF0604P48300930WW1

REPORT RENDERED TO:

GENERATION BRANDS, LLC
7400 LINDER AVE
SKOKIE, IL 60077
COUNTRY

STATEMENT OF LIMITATION

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01080748-3.

TEST STANDARDS

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

In Charge of Testing:

Reviewer:

Signature on file

Signature on file

Ian Smith
Engineer
Lighting Division

Jeff Davis
NA Technical Lead
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 10434974CHI-024

ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH08122020025613-024	ESSF0604P48300930W W1	ESSENCE 0604 P 300 930 W W	Production	8/12/2020

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	ESSF0604P48300930WW1	1

SUMMARY

REPORT NO. 10434974CHI-024

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	ESSF0604P48300930WW1
Product Description:	ESSENCE 0604 P 300 930 W W
LED Model No.:	P Series
Driver Model No.:	NA
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	1494.9	1513.3
Input Power (W) @ 24VDC (Vdc)	18.16	18.04
Lumen Efficacy (lm/W)	82.3	83.9
Input Power Factor (I) @ 24VDC (Vdc)	NA	NA

Criteria	Results
Input ATHD (%) @ 24VDC (Vdc)	NA
Correlated Color Temperature (K)	2930
Color Rendering Index - Ra (I)	97.6
Color Rendering Index - R9 (I)	98.5
Duv (I)	-0.0019
Chromaticity Coordinate (x)	0.439
Chromaticity Coordinate (y)	0.400
Chromaticity Coordinate (u')	0.254
Chromaticity Coordinate (v')	0.520

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 10434974CHI-024

Test Configuration	Tested Model No.	Pass/Fail/NA
1	ESSF0604P48300930WW1	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vdc)	Input Current (mA)	Input Power (W)	Input Power Factor ()
Up	24.0	756.3	18.16	NA

Light Output (lm)	Lumen Efficacy (lm/W)
1494.9	82.3

INTENSITY SUMMARY - CANDELA


Angle	0	22.5	45	67.5	90
0	498	498	498	498	498
5	487	492	496	503	507
10	483	487	492	500	503
15	475	478	484	491	495
20	463	465	470	476	482
25	447	447	452	458	464
30	426	425	431	437	443
35	402	400	406	411	418
40	374	371	377	381	388
45	343	339	345	348	355
50	310	305	309	313	319
55	274	268	272	275	281
60	236	229	232	236	240
65	195	188	190	194	198
70	151	144	148	152	155
75	106	101	106	110	113
80	65	60	66	72	74
85	26	25	33	39	42
90	0	0	0	0	0
95	0	0	0	0	0
100	0	0	0	0	0
105	0	0	0	0	0
110	0	0	0	0	0
115	0	0	0	0	0
120	0	0	0	0	0
125	0	0	0	0	0
130	0	0	0	0	0
135	0	0	0	0	0
140	0	0	0	0	0
145	0	0	0	0	0
150	0	0	0	0	0
155	0	0	0	0	0
160	0	0	0	0	0
165	0	0	0	0	0
170	0	0	0	0	0
175	0	0	0	0	0
180	0	0	0	0	0

Entire luminous intensity matrix found in .IES file

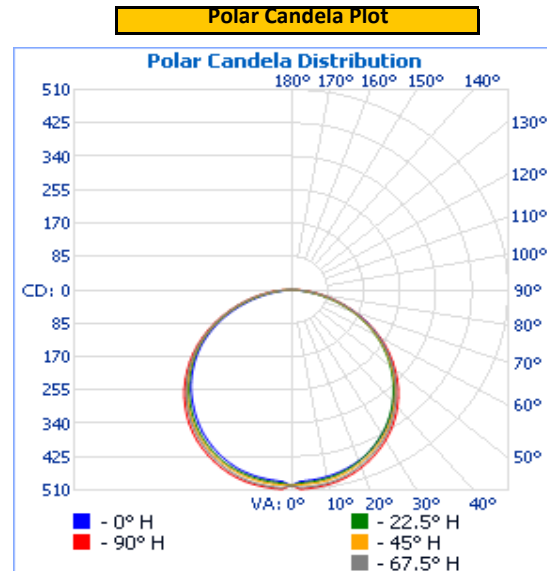

REPORT NO. 10434974CHI-024

ILLUMINANCE SUMMARY

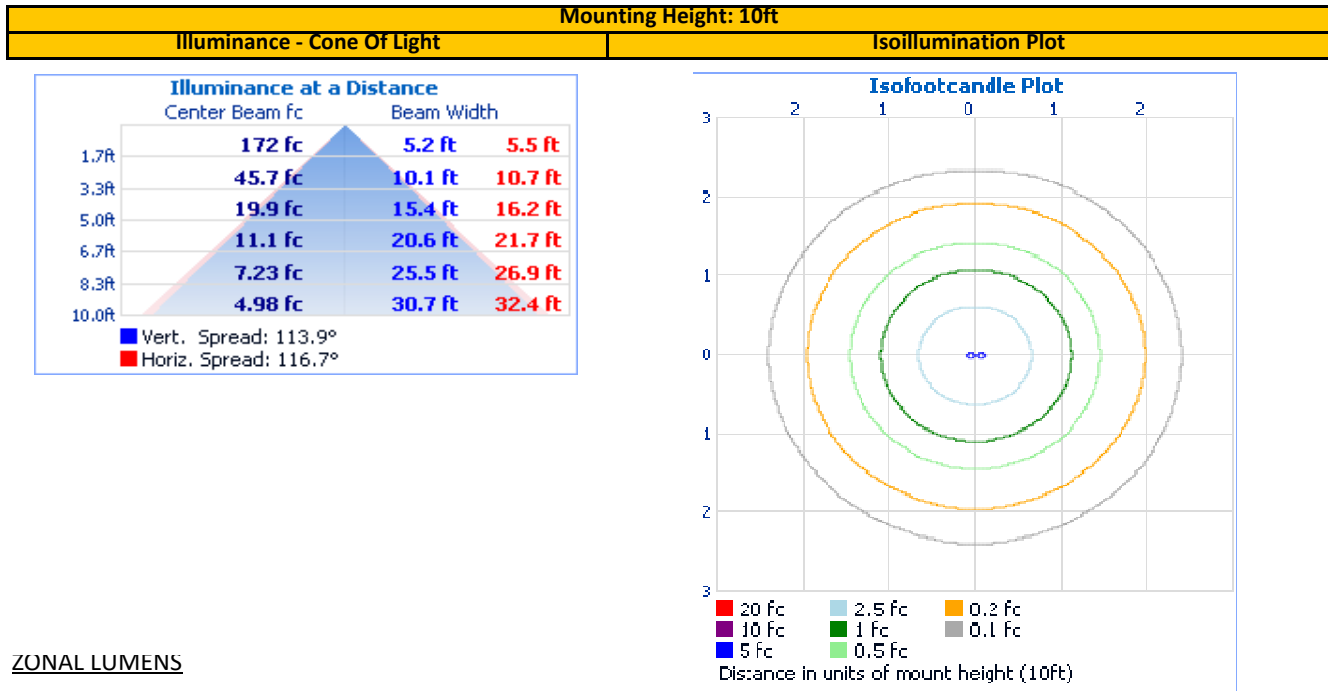

ZONAL LUMENS

Zonal Lumen Summary					
Zone	Lumens	Luminaire	Zone	Lumens	Total
0-30	392.6	26.3%	0-10	47.3	3.2%
0-40	646.5	43.2%	10-20	136.6	9.1%
0-60	1,156.4	77.4%	20-30	208.7	14.0%
60-90	338.6	22.6%	30-40	253.9	17.0%
70-100	148.9	10.0%	40-50	265.9	17.8%
90-120	0.0	0.0%	50-60	243.9	16.3%
0-90	1,494.9	100.0%	60-70	189.6	12.7%
90-180	0.0	0.0%	70-80	112.7	7.5%
0-180	1,494.9	100.0%	80-90	36.3	2.4%
			90-100	0.0	0.0%
			100-110	0.0	0.0%
			110-120	0.0	0.0%
			120-130	0.0	0.0%
			130-140	0.0	0.0%
			140-150	0.0	0.0%
			150-160	0.0	0.0%
			160-170	0.0	0.0%
			170-180	0.0	0.0%

INTEGRATING SPHERE TESTING

REPORT NO. 10434974CHI-024

Test Configuration	Tested Model No.	Pass/Fail/NA
1	ESSF0604P48300930WW1	NA

PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation
Up

Input Voltage (Vdc)	Input Current (mA)	Input Power (W)	Input Power Factor (I)	Input ATHD (%)
23.99	751.8	18.04	NA	NA

Measured at 23.99(Vdc)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra (I)	CRI - R9 (I)
1513.3	83.9	2930	97.6	98.5

Duv (I)	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
-0.0019	0.439	0.400	0.254	0.520

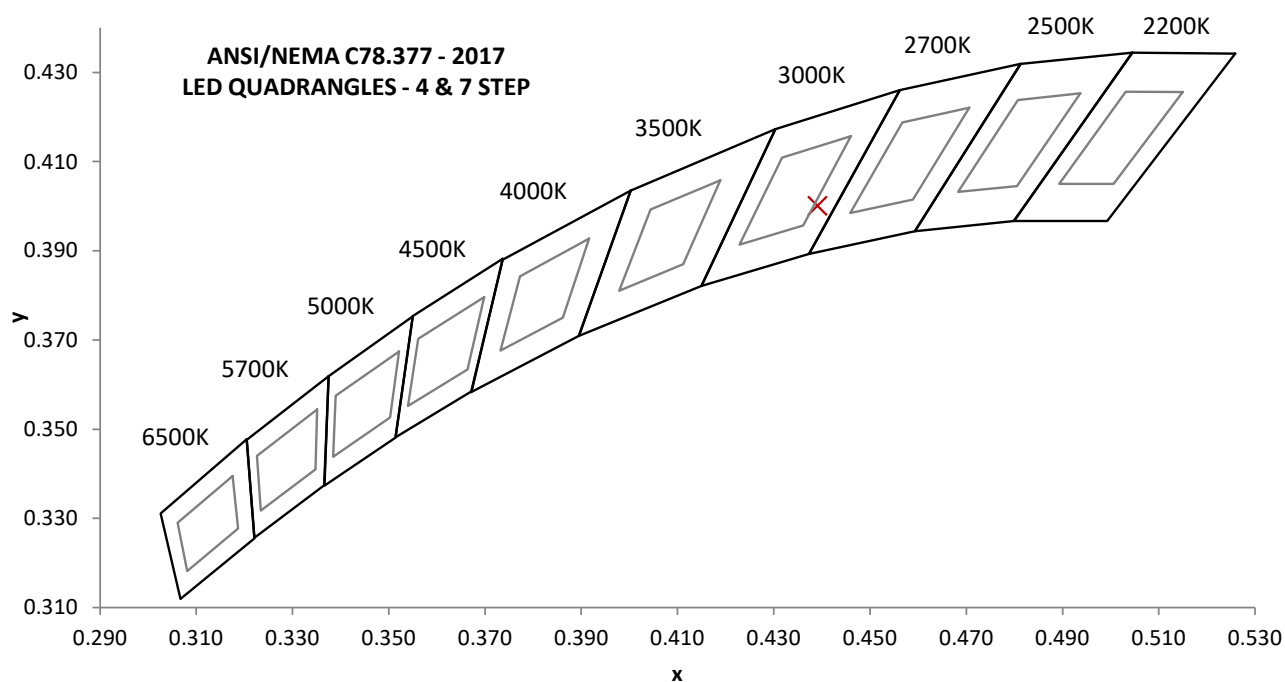


REPORT NO. 10434974CHI-024

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm		nm	mW/nm		nm	mW/nm		nm	mW/nm
350	1.2		460	11.4		570	20.9		680	21.6
355	1.1		465	10.8		575	21.4		685	19.6
360	1.2		470	9.4		580	21.9		690	17.6
365	1.0		475	7.9		585	22.8		695	15.9
370	1.0		480	8.0		590	23.7		700	14.1
375	1.0		485	8.7		595	24.8		705	12.5
380	0.9		490	9.4		600	26.2		710	11.1
385	0.6		495	10.6		605	27.5		715	9.7
390	0.7		500	11.8		610	29.3		720	8.7
395	0.6		505	13.0		615	30.6		725	7.5
400	0.5		510	14.1		620	31.8		730	6.4
405	0.4		515	15.0		625	33.1		735	5.7
410	0.5		520	15.8		630	33.5		740	4.9
415	0.6		525	16.5		635	33.9		745	4.4
420	0.7		530	17.2		640	33.9		750	3.7
425	1.0		535	18.0		645	33.2		755	3.3
430	1.6		540	18.6		650	32.3		760	3.0
435	2.6		545	19.1		655	31.0		765	2.7
440	4.9		550	19.5		660	29.3		770	2.4
445	9.7		555	20.0		665	27.6		775	2.2
450	15.6		560	20.4		670	25.6		780	2.1
455	14.7		565	20.7		675	23.7		---	---

Without correction of sample absorption.

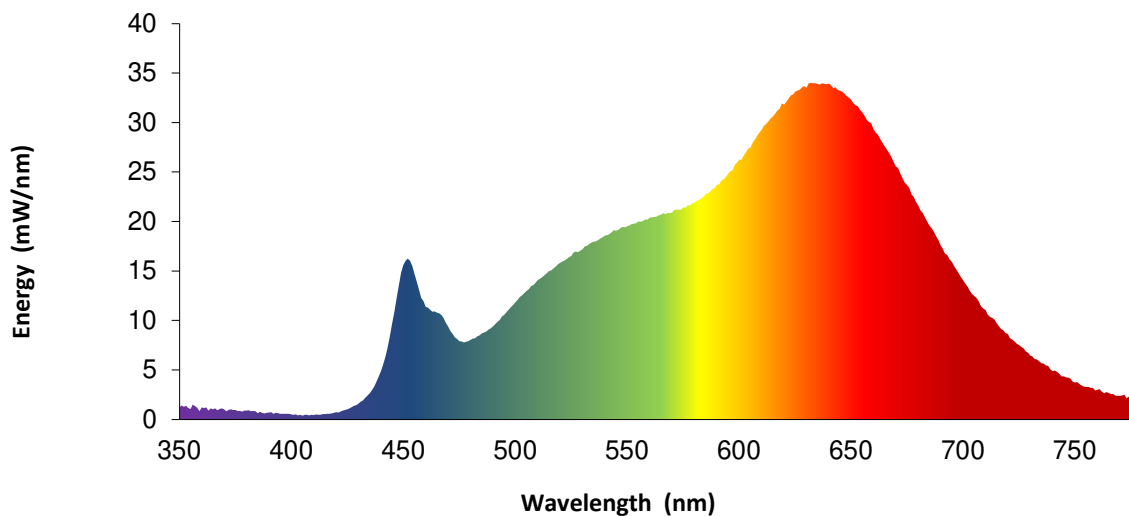

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

EQUIPMENT LIST

REPORT NO. 10434974CHI-024

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
2	Omega Thermometer	DPI8-C24	146920	10/3/2019	10/3/2020
3	LSI High Speed Mirror Goniometer	6440T	146928	VBU	VBU
4	Newport Thermohygrometer	iServer	146957	12/2/2019	12/2/2020
5	Sorenson DC Power Supply	XHR 150-7	146922	VBU	VBU
6	Newport Humidity Recorder	iServer	CHI0456	10/11/2019	10/11/2020
7	Labsphere Spectroradiometer	CDS-600	146923	VBU	VBU
8	2M Rotating Sphere	7660-ROT	146923	VBU	VBU
9	Omega thermometer	USB TC08	EQA002615	4/7/2020	4/7/2021
10	Ametek DC Power Supply	XFR150-8	1468464	VBU	VBU
11	Yokogawa Power Meter	WT210	146880	10/2/2019	10/2/2020
12	Chroma Power Supply	61604	CHI0371	VBU	VBU
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	<i>ZIS</i> Ian Smith	Jeff Davis <i>JD</i>	Corrected Product Name, Description, LED Model
---	---	---	---	---
---	---	---	---	---