

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Laboratory and Equipment

Laboratory Owner and Location

Goniospectrometer System and Type

Sensor Name, Calibr. Date and Serial No.

Spectrometer Manufacturer and Model

Viso Systems, Copenhagen V, Denmark

LabSpion – Type C, horizontal

LabSensor – 6/20/2022 – 0166732104

Ibsen Photonics, Denmark – Freedom VIS (Custom Viso)

Measurement Conditions

Number of C-planes and Resolution

γ (gamma)-Resolution

Test Distance

Input Power, Power and Displ. Factors

Input RMS Voltage and Current

Frequency of Input Power

Warm-up Time and Variation

8 planes – 45°

5°

7.00 m

16.7 W – PF 1.0 – DPF 0.71

24.0 V – 0.697 A

0 Hz

Lamp stabilized in 36 min 16 sec – 0.5%

Tested Light Source

Product Name

Item No. and Manufacturer

Product Description (line 1)

TR1223 Essence Side bend 927K

AB1983-01 LNTT 927K 300LPF WH 0408 2S 24V 2.0IN 5.5WPF SIL –

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)

Efficiency

Peak Intensity and Beam Angle

Correlated Color Temperature, Target/Measured

Color Rendering Index

Color Rendering TM30-18

Color Shift, CIE duv and MacAdam Steps

Flicker

759 lm – 3.3% / 96.7%

45 lm/W

251 cd – 112.4°



CCT = 2627 K / 2627 K

CRI 97.5

R_f 95.6 – R_g 102.1

Duv -0.0011 – SDCM n/a

SVM n/a – PstLM n/a

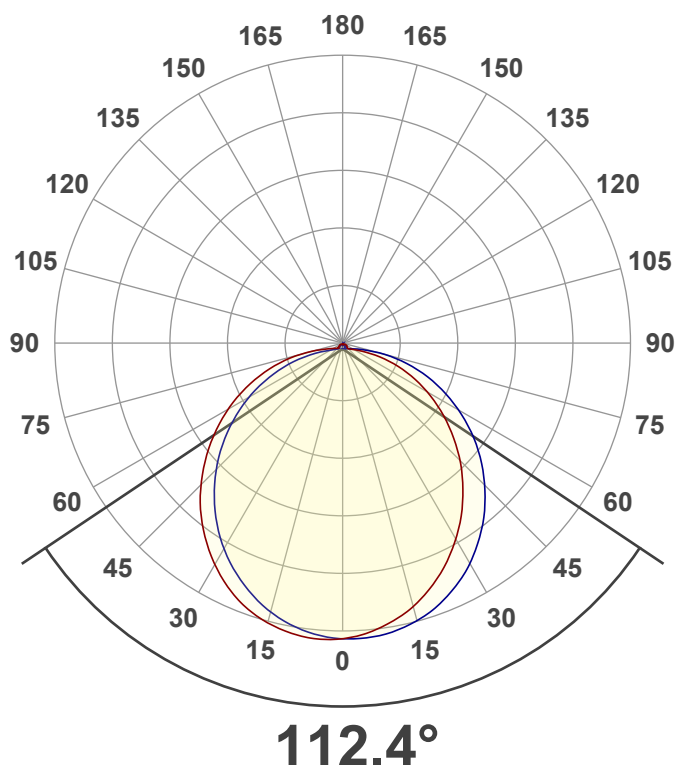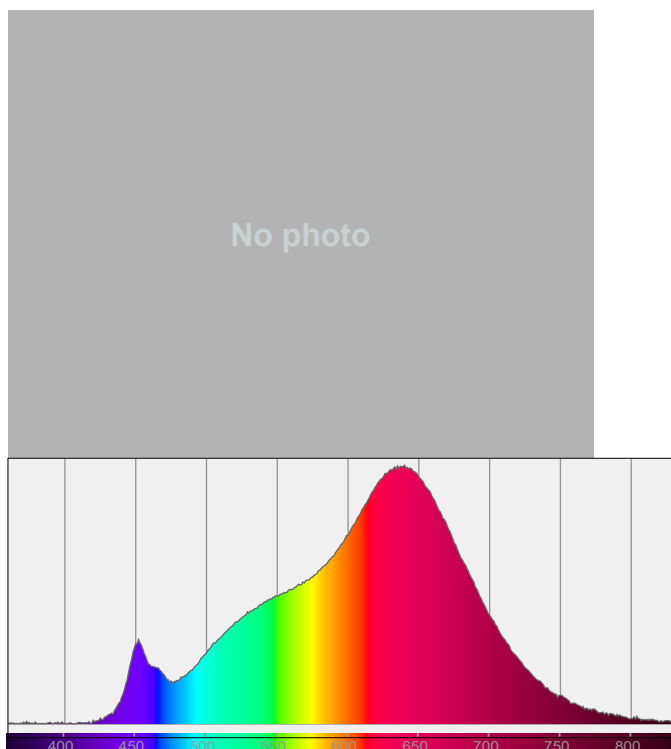

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS


Measurement tracking No. and Link: [n/a](#)

Operator:



Luminous Intensity diagram

Unit: 0-100% of peak intensity

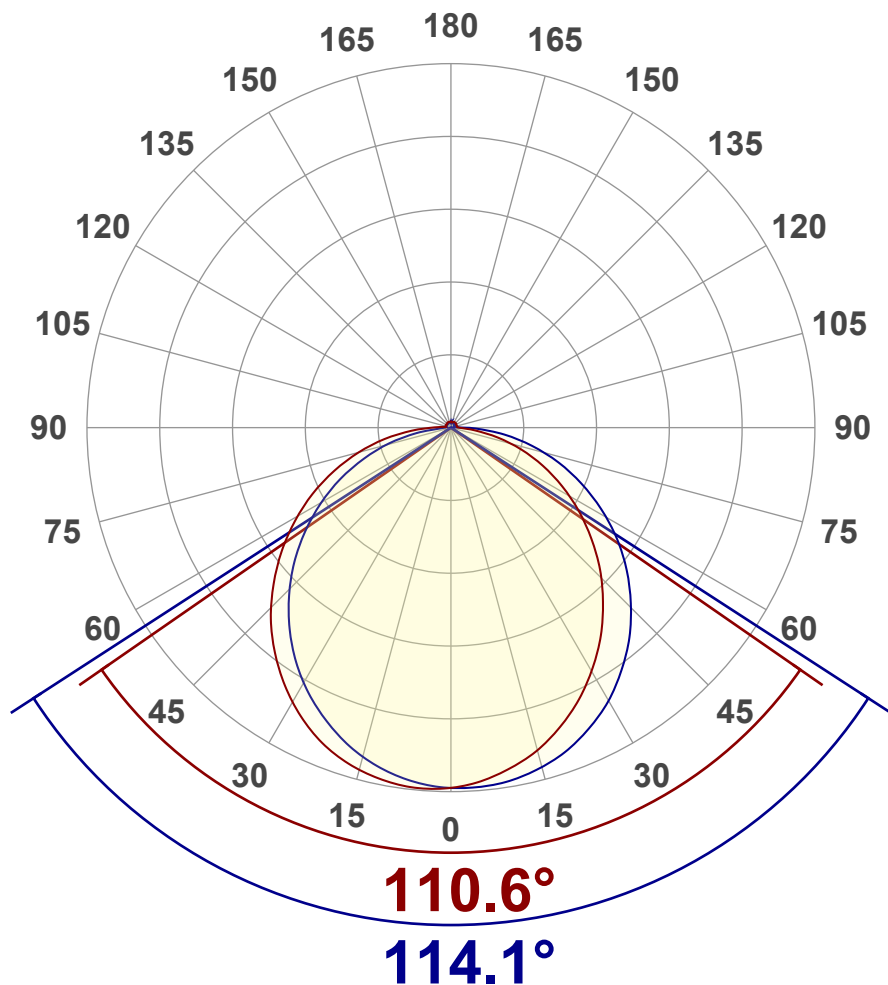

Main Values

Output (total Lumen)	759 lm
Lumen Up% / Down%	3.3% / 96.7%
Peak Intensity	251 cd
Beam Angle (50%)	112.4°
Beam Angle (90%)	114.1°
Beam Angle (10%)	110.6°

Cut-off Angle

Average 2,5%	182.2°
--------------	--------

Field Angle

Average 10%	167°
-------------	------


Intensity Ratio

In 120° cone	73.8%
In 90° cone	50.1%

C000-C180

C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

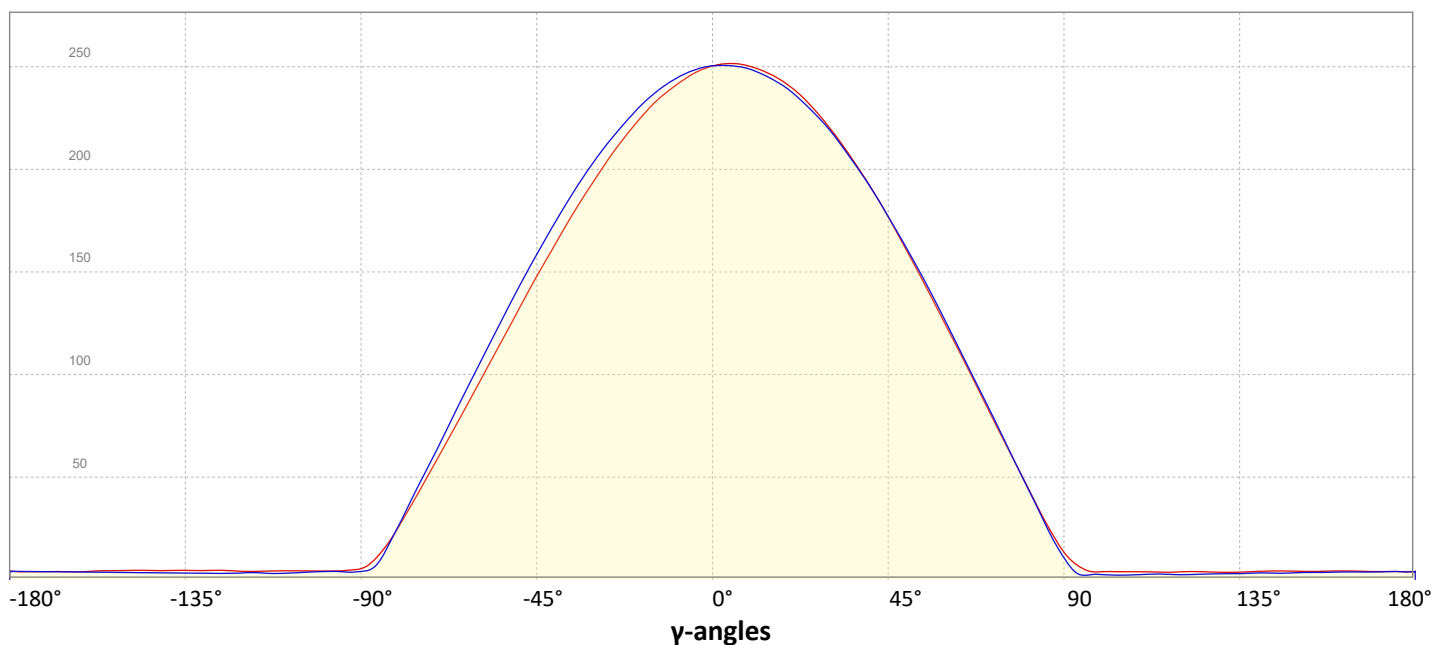


Light Measurement Report


Print date: 10/23/2023
Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS
Measurement tracking No. and Link: [n/a](#)
Operator:



Iso-intensity Diagram (Iso-candela)

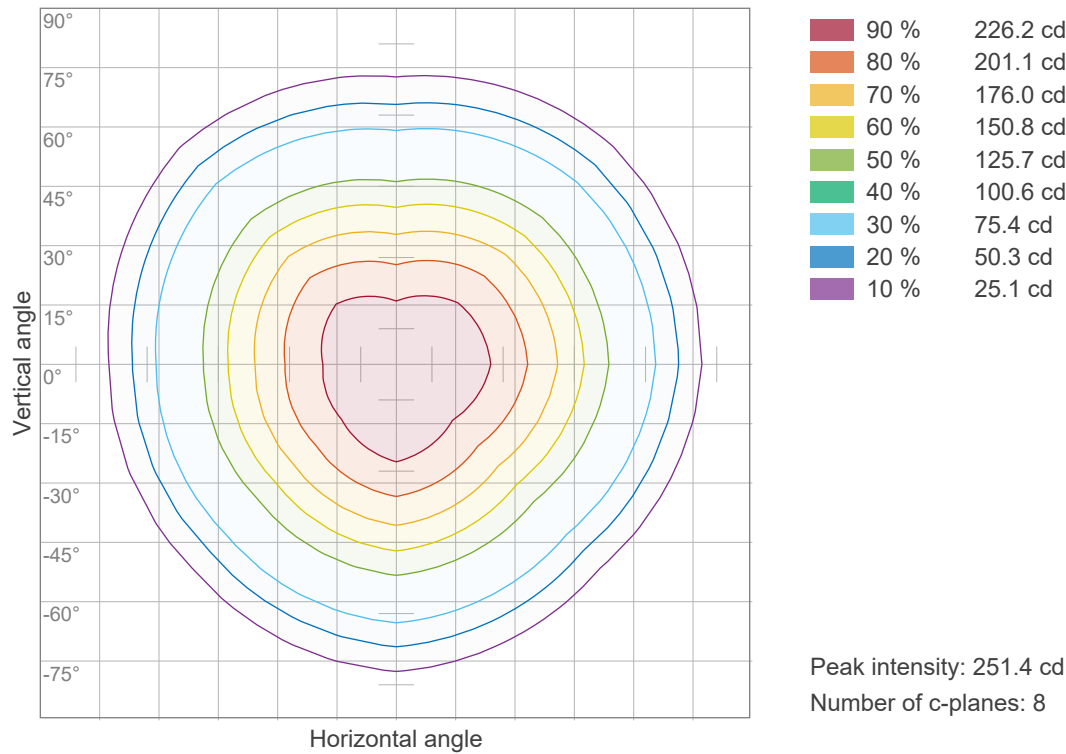

Iso-illuminance Diagram (Iso-lux)

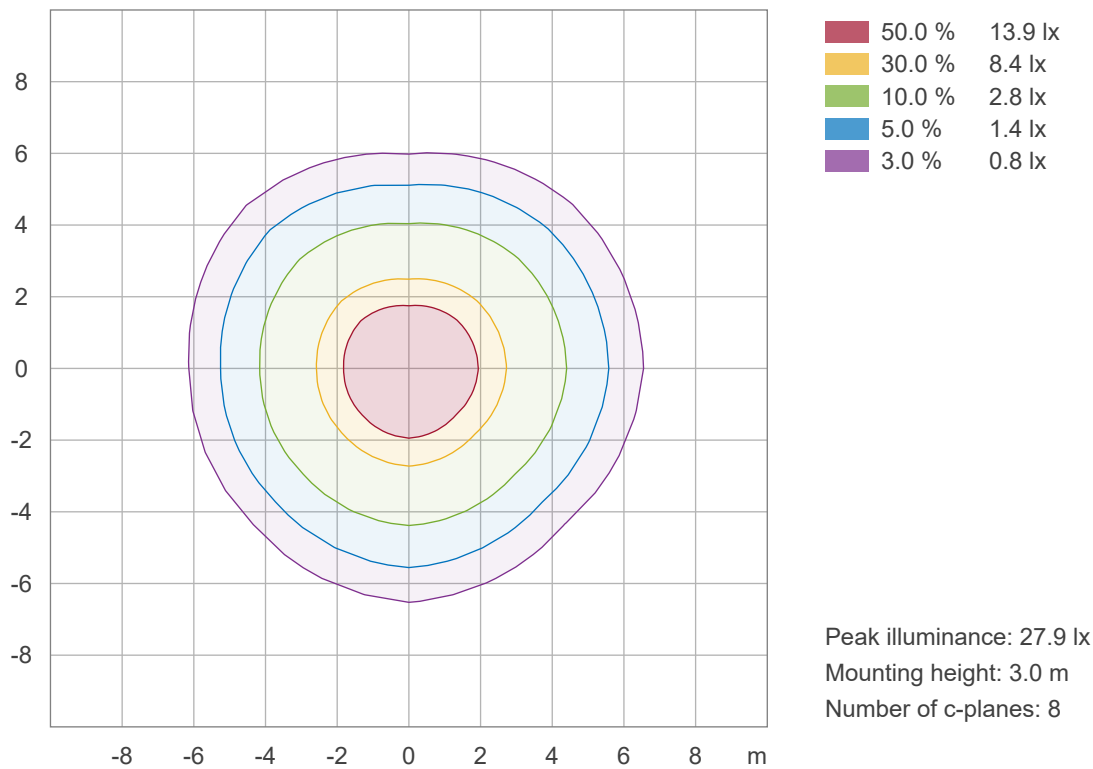

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:




Color details


Correlated Color Temperature, Target CCT = 2627 K
Correlated Color Temperature, Measured CCT = 2627 K
Color Rendering Index CRI 97.5
Color Rendering Index, R9 (red component) R9 = 96.6
Color Rendering TM30-18 R_f 95.6 – R_g 102.1
Color Quality Scale CQS = 95.0

MacAdam Steps
Color coordinates CIE 1931 (x;y) = (0.464;0.409)
Color coordinate CIEs 1960 (u;v) = (0.266;0.351)
Color deviation from BBL Duv = -0.0011
Color coordinate CIEs 1976 (CIELUV) (u';v') = (0.266;0.527)


CIE 1931

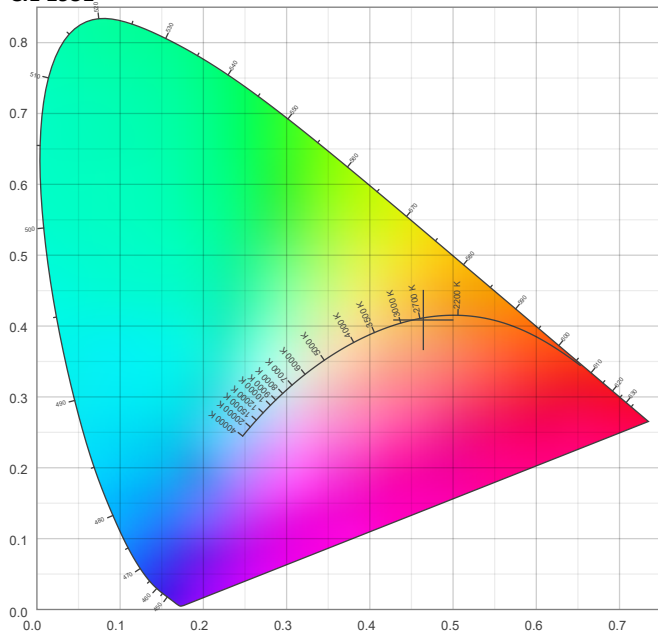

CIE 1931 – zoomed on Planckian locus

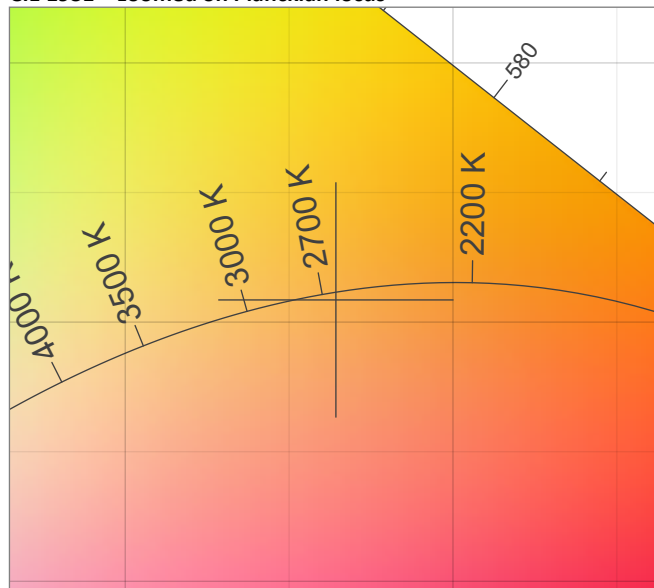


Color Rendering Index per reference color (CIE 1995)

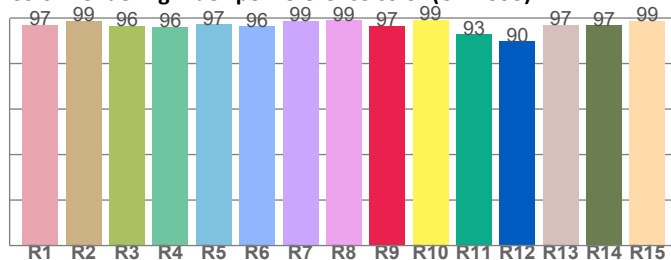


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
97.0	98.7	96.5	96.2	97.3	96.3	98.7	99.0	96.6	99.3	92.9	89.8	97.1	96.7	98.8

Spectral power distribution (SPD) / W/nm – 0-100%

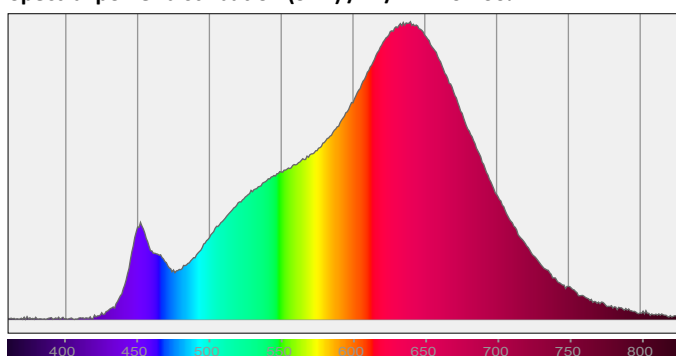


TM30-18 R_f-values per hue bin

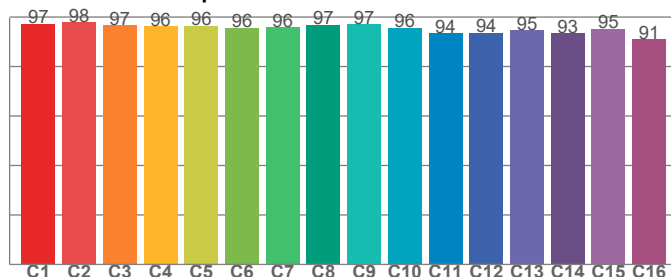

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
97.2	98.0	96.7	96.2	96.4	95.6	95.8	96.9	97.1	95.6	93.5	93.6	94.6	93.3	95.2	91.1

Color Quality Scale by reference color

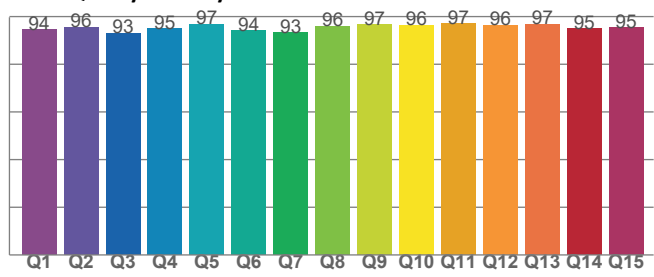

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94.5	95.5	93.1	94.9	96.8	94.0	93.2	95.8	96.5	96.3	97.0	96.4	96.7	94.9	95.3

Light Measurement Report

Print date: 10/23/2023


Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Beam Details

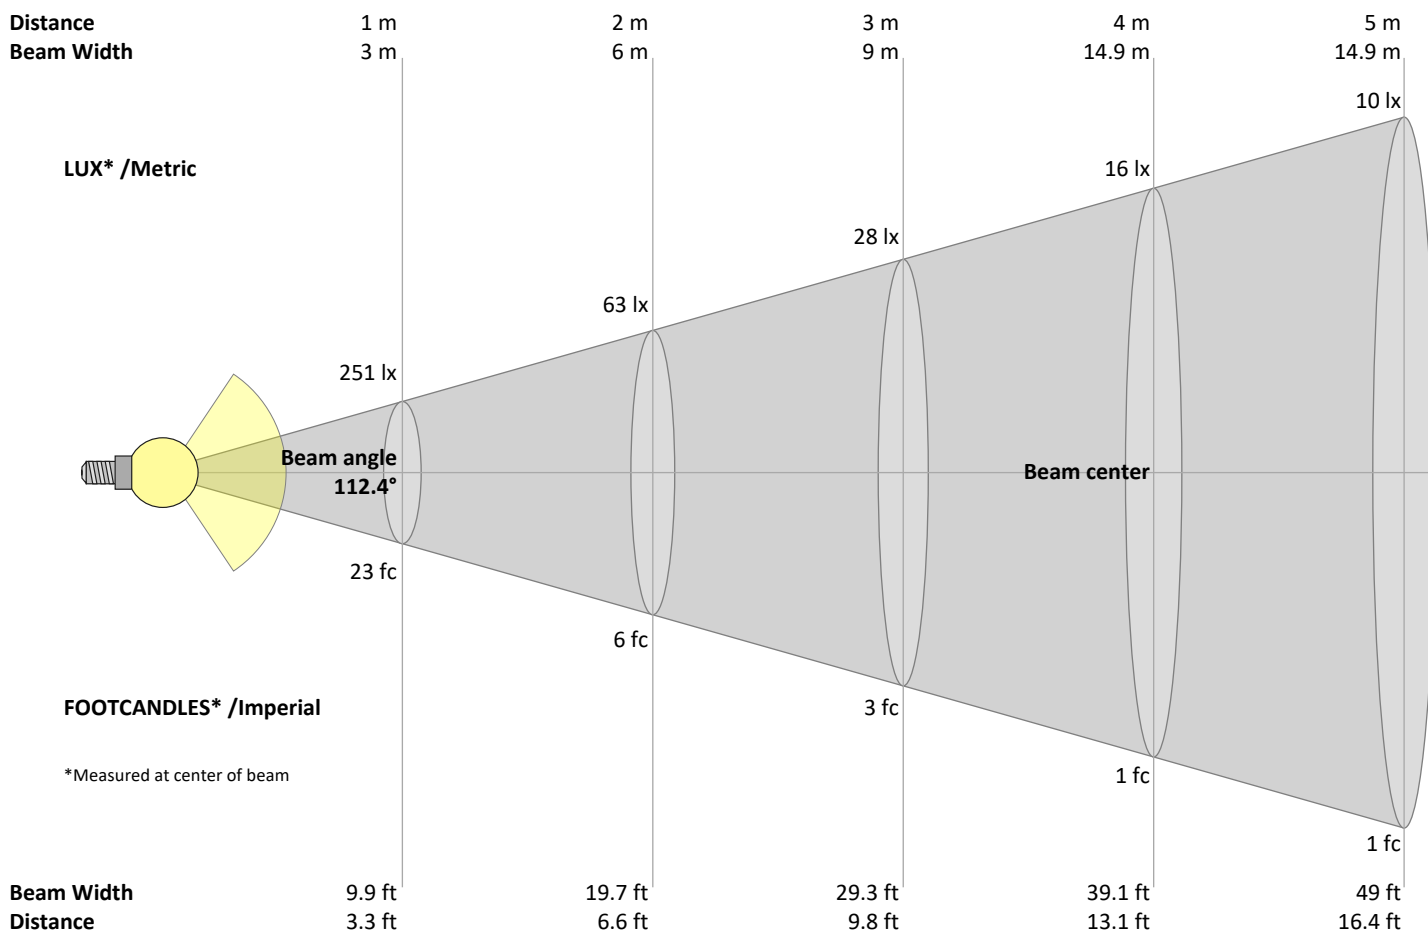

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
251	63	28	16	10	7	5	4	3	3	2	2	1	1	1	1	1	1	1	1	lux
23.3	5.8	2.6	1.5	0.9	0.6	0.5	0.4	0.3	0.2	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.1	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
251	246	240	232	222	209	195	181	164	148	130	113	95	78	61	44	27	14	6	4	cd
100%	98%	96%	93%	88%	84%	78%	72%	66%	59%	52%	45%	38%	31%	24%	17%	11%	5%	2%	2%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
251	250	248	244	238	229	219	206	193	177	160	143	125	106	86	67	48	28	12	3	cd
100%	100%	99%	97%	95%	92%	87%	82%	77%	71%	64%	57%	50%	42%	34%	27%	19%	11%	5%	1%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
251	251	250	246	240	231	220	207	193	177	159	141	123	104	85	66	48	29	14	6	cd
100%	100%	100%	98%	96%	92%	88%	83%	77%	71%	64%	56%	49%	42%	34%	26%	19%	12%	6%	2%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
251	248	243	237	228	217	205	191	175	158	141	123	104	85	66	47	28	11	5	4	cd
100%	99%	97%	94%	91%	87%	82%	76%	70%	63%	56%	49%	41%	34%	26%	19%	11%	4%	2%	2%	of 0°val

Light Measurement Report


Print date: 10/23/2023
Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS
Measurement tracking No. and Link: [n/a](#)
Operator:



Luminaire budgetary diagram

Uncorrected, comprehensive UGR table according to 117-1995

LAMPS (number of lamps)

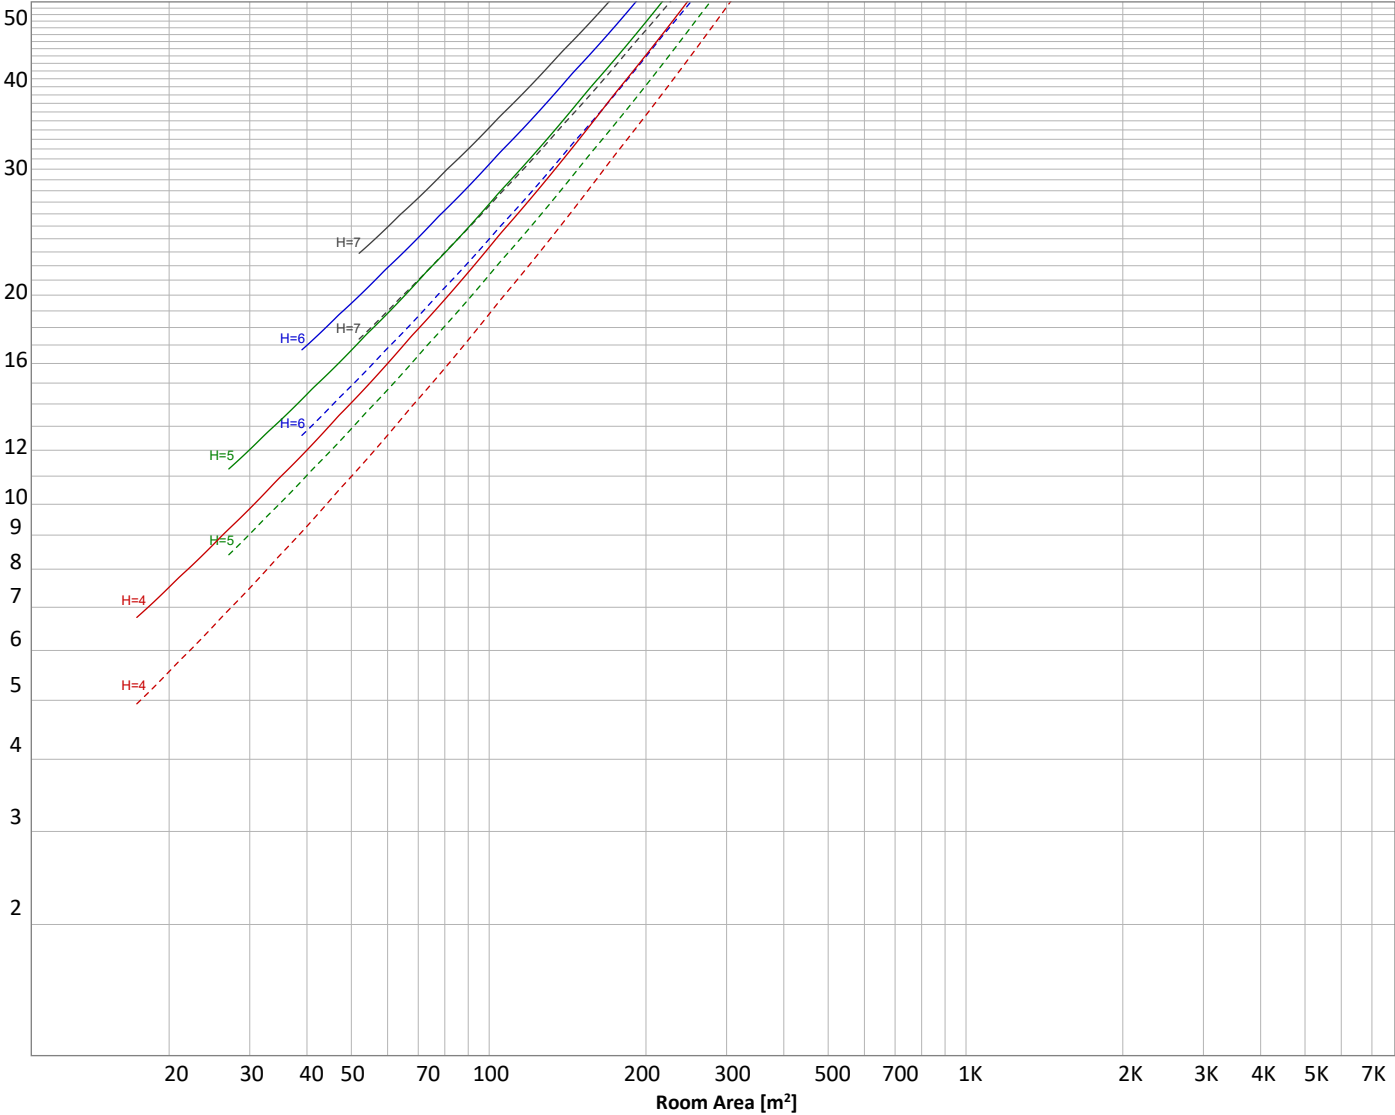

Conditions

H = Room height	Flux = 759 lm	p(%)		
H _{down} = Lamp distance from ceiling =	0.00 m	Line type	Ceiling reflectance	Wall reflectance
H _{work} = Work area height from floor =	0.00 m	-----	70	50
E _{work} = Average lux on work area =	100 lx	_____	50	30
				Floor reflectance
				30
				20

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
23.7 lm	67.7 lm	102 lm	123 lm	127 lm	116 lm	92.1 lm	58.9 lm	23.2 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
5.49 lm	3.86 lm	3.63 lm	3.35 lm	3.01 lm	2.45 lm	1.81 lm	1.12 lm	0.380 lm

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Outdoor Light Planning

Lumen per Zone

Zone (y)	Lumen	% Total
0-10°	24 lm	3.1%
10-20°	68 lm	8.9%
20-30°	102 lm	13.5%
30-40°	123 lm	16.2%
40-50°	127 lm	16.8%
50-60°	116 lm	15.3%
60-70°	92 lm	12.1%
70-80°	59 lm	7.7%
80-90°	23 lm	3.1%
90-100°	5 lm	0.7%
100-110°	4 lm	0.5%
110-120°	4 lm	0.5%
120-130°	3 lm	0.4%
130-140°	3 lm	0.4%
140-150°	2 lm	0.3%
150-160°	2 lm	0.2%
160-170°	1 lm	0.1%
170-180°	0 lm	0.1%
Total	759 lm	100.0%

Intensity peaks

Max intensity	251 cd
Intensity, 90°	6 cd
Intensity, 0°	251 cd

Zonal Lumen summary

Zone (y)	Lumen	% Total
0-30°	194 lm	25.5%
0-40°	317 lm	41.7%
0-60°	560 lm	73.8%
60-90°	174 lm	22.9%
70-100°	88 lm	11.5%
90-120°	13 lm	1.7%
0-90°	734 lm	96.7%
90-180°	25 lm	3.3%
0-180°	759 lm	100.0%


BUG rating

	Lumen	% Total
Forward light		
Low(0-30°)	96 lm	12.7%
Medium(30-60°)	182 lm	23.9%
High(60-80°)	76 lm	10.1%
Very high(80-90°)	13 lm	1.7%
Back light		
Low(0-30°)	97 lm	12.8%
Medium(30-60°)	184 lm	24.3%
High(60-80°)	75 lm	9.8%
Very high(80-90°)	11 lm	1.4%
Uplight		
Low(90-100°)	6 lm	0.7%
High(100-180°)	20 lm	2.6%

IESNA TM-15-07

Luminaire Classification System For Outdoor Luminaires

BUG rating B0 U2 G1

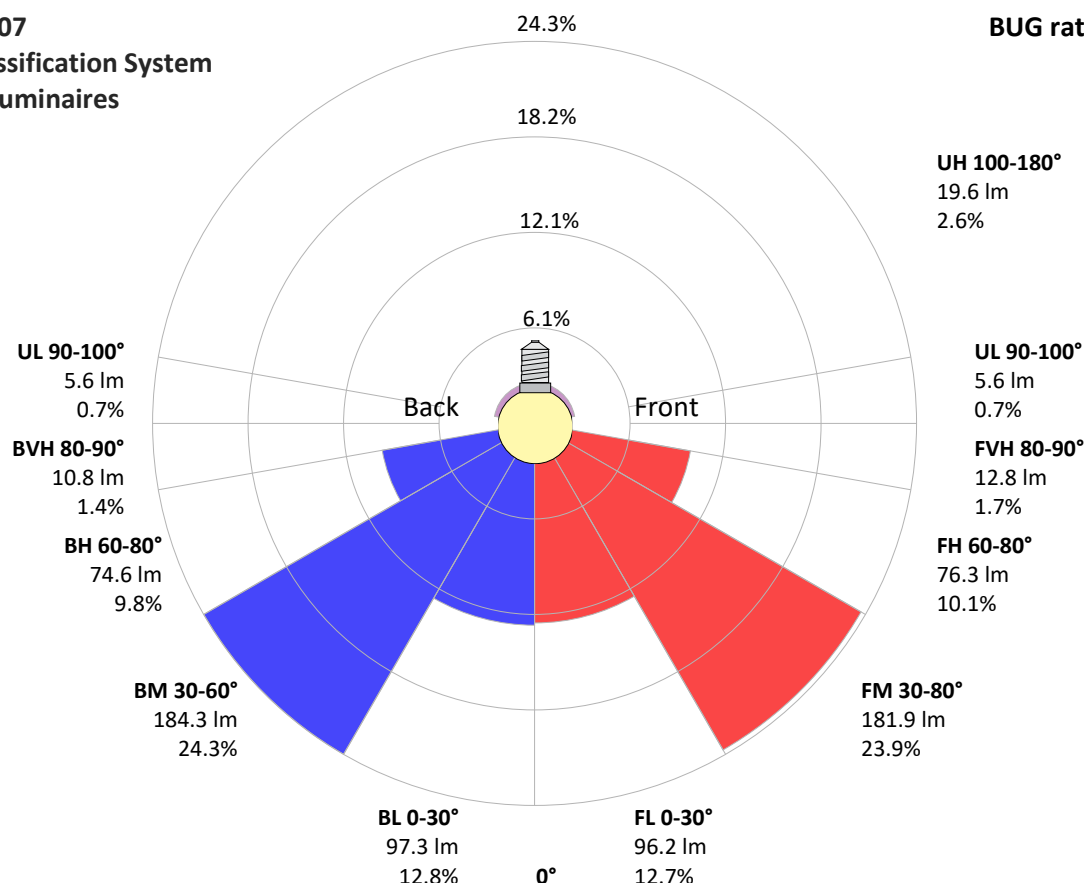

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:




Power Details

Input Power

Power feed to light source	16.7 W
Frequency of input power	0 Hz
RMS Input voltage feed, V_{RMS}	24.0 V
RMS Input current feed, I_{RMS}	0.697 A
Volt-Ampere or apparent power = $V_{RMS} * I_{RMS}$	16.72 VA
Displacement factor of AC power feed	0.71
Power factor of AC current feed	1.0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input Power Curve



Efficiency

Radiated power efficiency 18.0%



Lumen efficiency 45 lm/W



Stabilization Details

Warmup Conditions

Stable period	15 min
Stable change max	0.5%
Minimum time	30 min

Color Temperature Change

CCT start	2667 K
CCT shift	-40 K
CCT end	2627 K


Warmup Result

Total warmup time	Lamp stabilized in 36 min 16 sec
Warmup variation	-5.7%

Output Change

Output start	804 lm
Output change	-45 lm
Output end	759 lm

Stabilization Curve

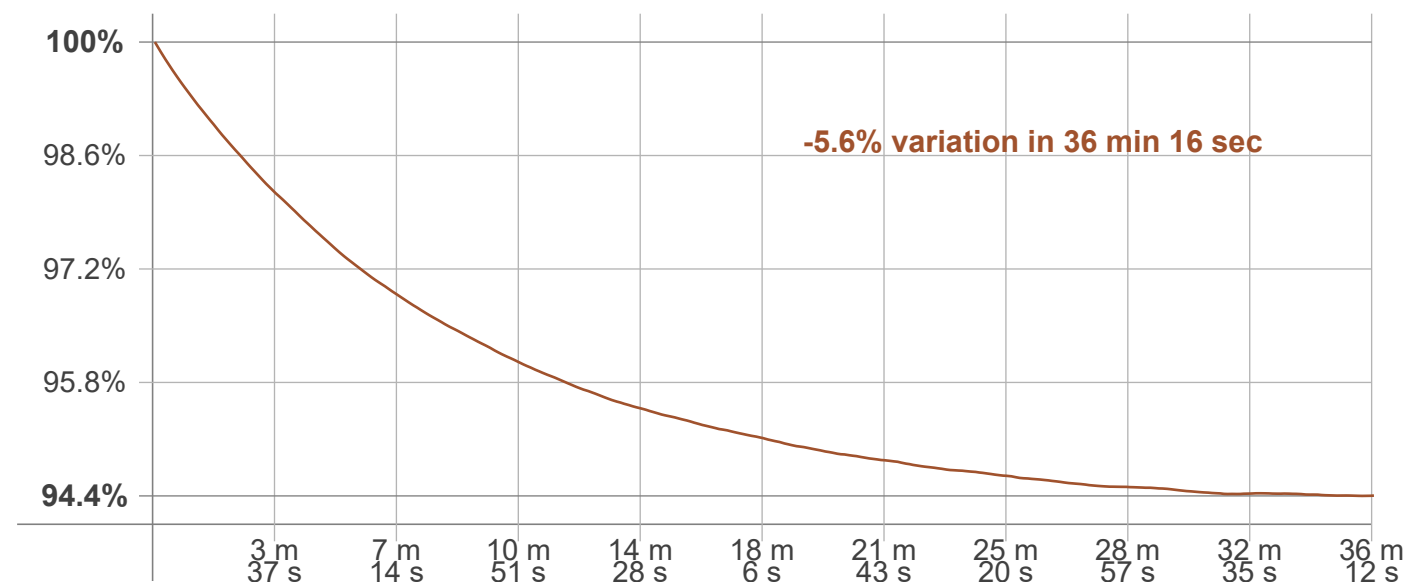

Light Measurement Report

Print date: 10/23/2023

Measurement date and time: 10/20/2023 2:59:54 PM – Measurement no. VFR-231020-0074-MS

Measurement tracking No. and Link: [n/a](#)

Operator:



Flicker /TLA details

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 0 Hz
Flicker/TLA sample rate n/a samples/s

Measurement time
PstLM 180 sec
All other indices 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency n/a Hz
Percent Flicker n/a %
Flicker index n/a

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz n/a %
JA8/10 90 Hz n/a %
JA8/10 200 Hz n/a %
JA8/10 400 Hz n/a %
JA8/10 1000 Hz n/a %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value ($F < 80$ Hz) n/a
SVM value ($80 < F < 2000$ Hz) n/a


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp n/a

Flicker frame (frame of one flicker period in time domain)

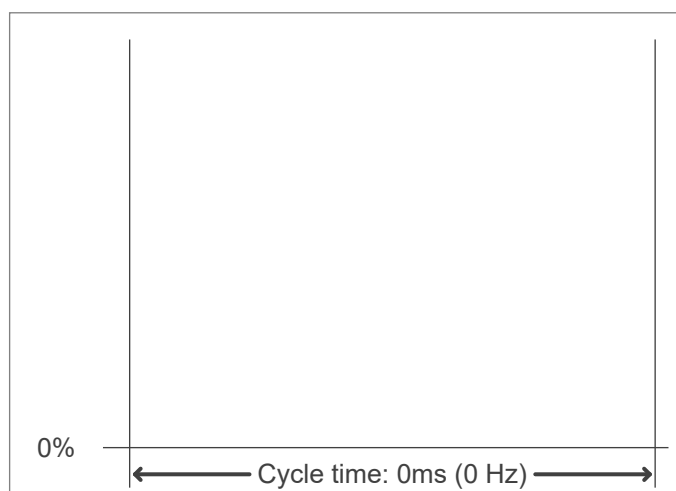

Flicker FFT (flicker curve in frequency domain)

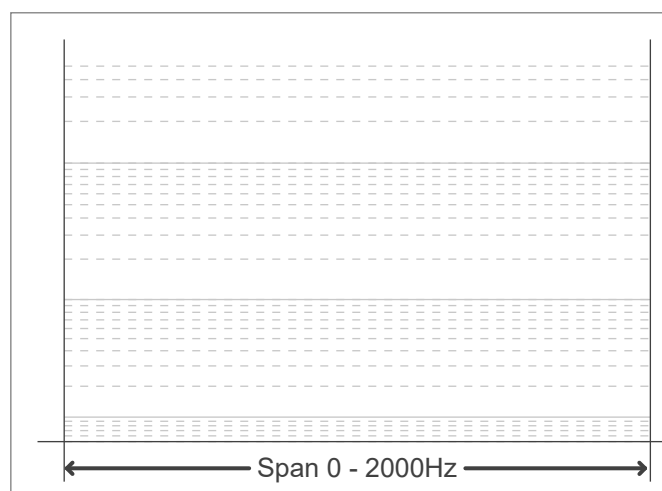

IEEE 1789 Frequency/modulation plot

