

VISUAL COMFORT & Co.

Light efficiency:


105 Lumen/Watt

Output: 1199 lm

Peak: 314 cd

Power: 11.4 W

PF: 1.0

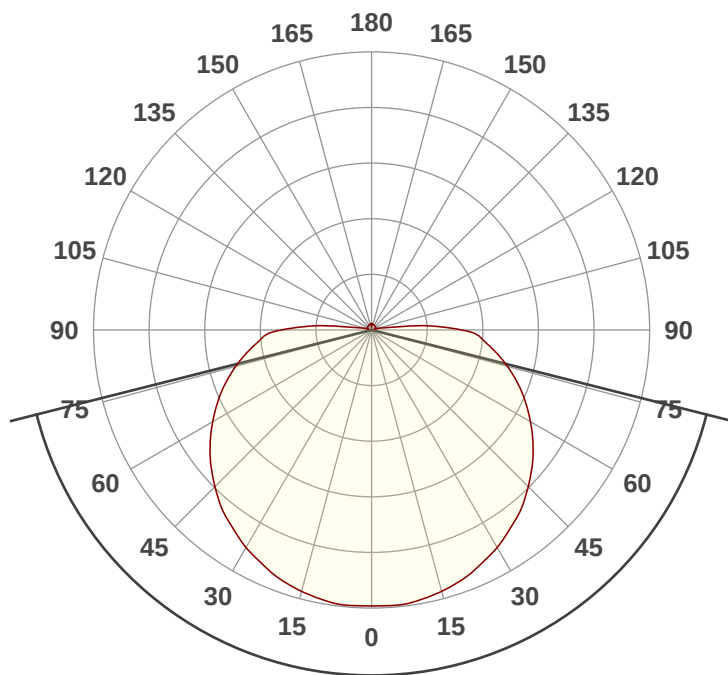

151.7°

Beam angle


Product name:

TR1045 AB1231-02

Date and time:

12/9/2022 1:02:30 PM

Power

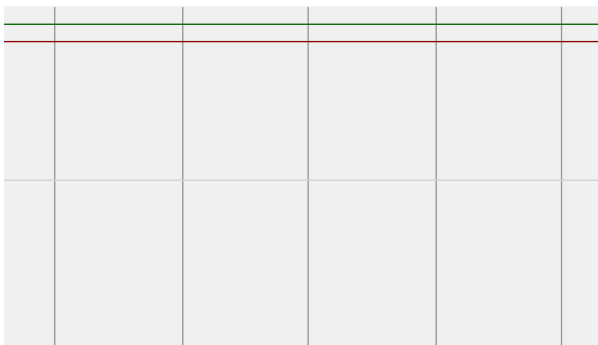


Voltage: 24.0 V

Current: 0.475 A

VISUAL COMFORT & Co.

ISO Diagrams

ISO candela diagram

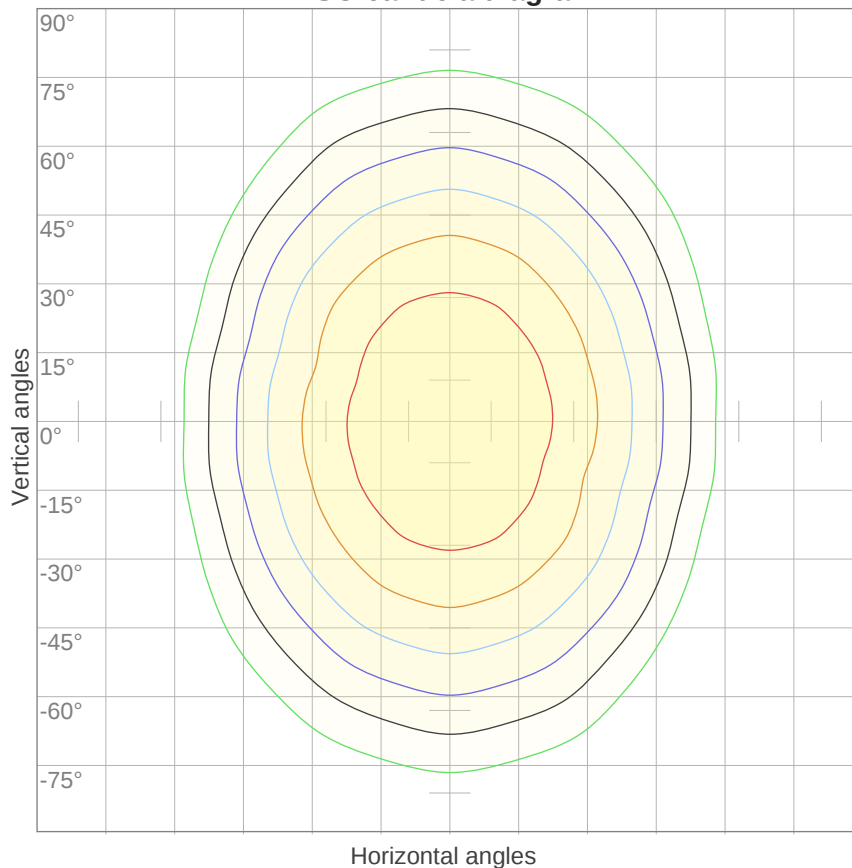


10%	31 cd
20%	63 cd
30%	94 cd
40%	125 cd
50%	157 cd
60%	188 cd
70%	219 cd
80%	251 cd
90%	282 cd

Conditions:

Number of c-planes: 16

Candela at center: 313 cd

ISO lux diagram

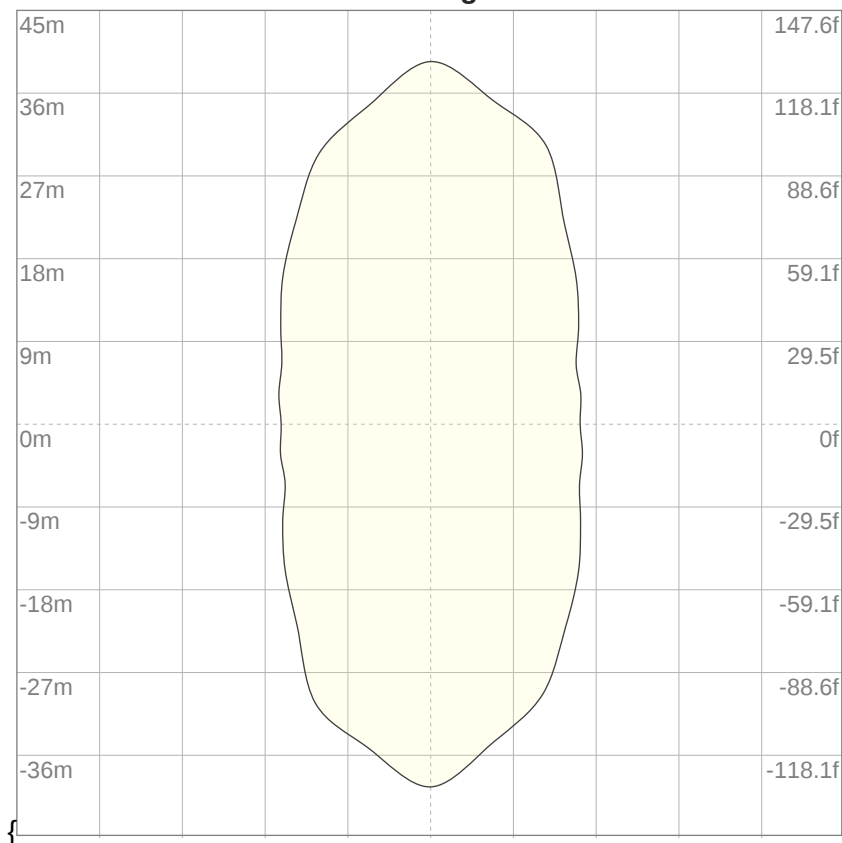

3%	9 lx
5%	16 lx
10%	31 lx
30%	94 lx
50%	157 lx

Conditions:

Number of c-planes: 16

Lux at center: 313 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*

Mounting height: 1 Meters (3 Feet)