

VISUAL COMFORT & Co.

Light efficiency:


100 Lumen/Watt

Output: 1226 lm

Peak: 320 cd

Power: 12.2 W

PF: 1.0

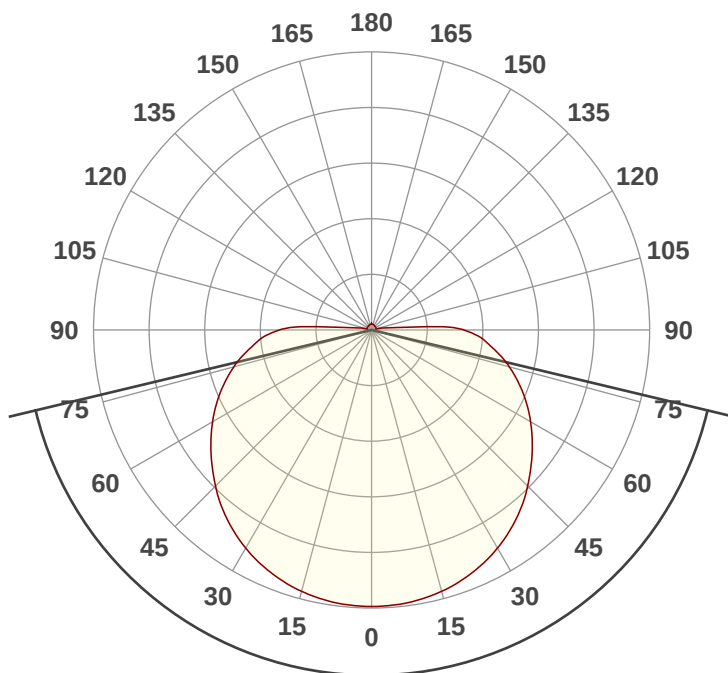

153.1°

Beam angle


Product name:

TR1045 AB1231-01

Date and time:

12/9/2022 12:22:08 PM

Power

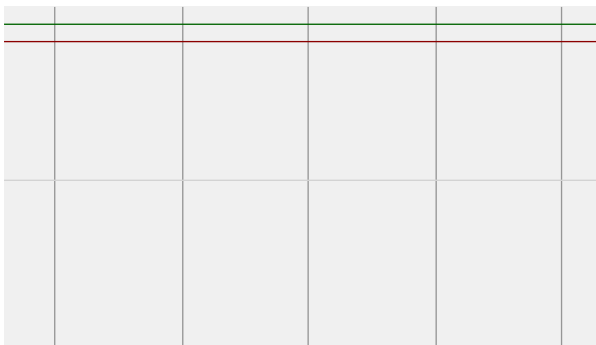


Voltage: 24.0 V

Current: 0.510 A

VISUAL COMFORT & Co.

ISO Diagrams

ISO candela diagram

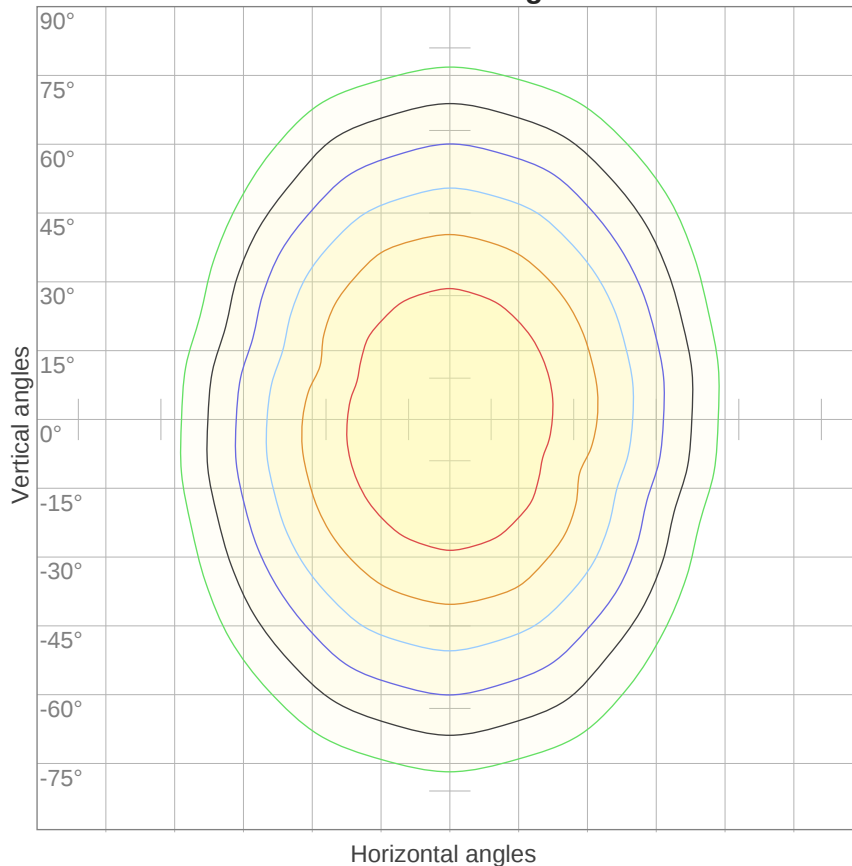


10%	32 cd
20%	64 cd
30%	96 cd
40%	128 cd
50%	160 cd
60%	192 cd
70%	224 cd
80%	256 cd
90%	288 cd

Conditions:

Number of c-planes: 16

Candela at center: 320 cd

ISO lux diagram

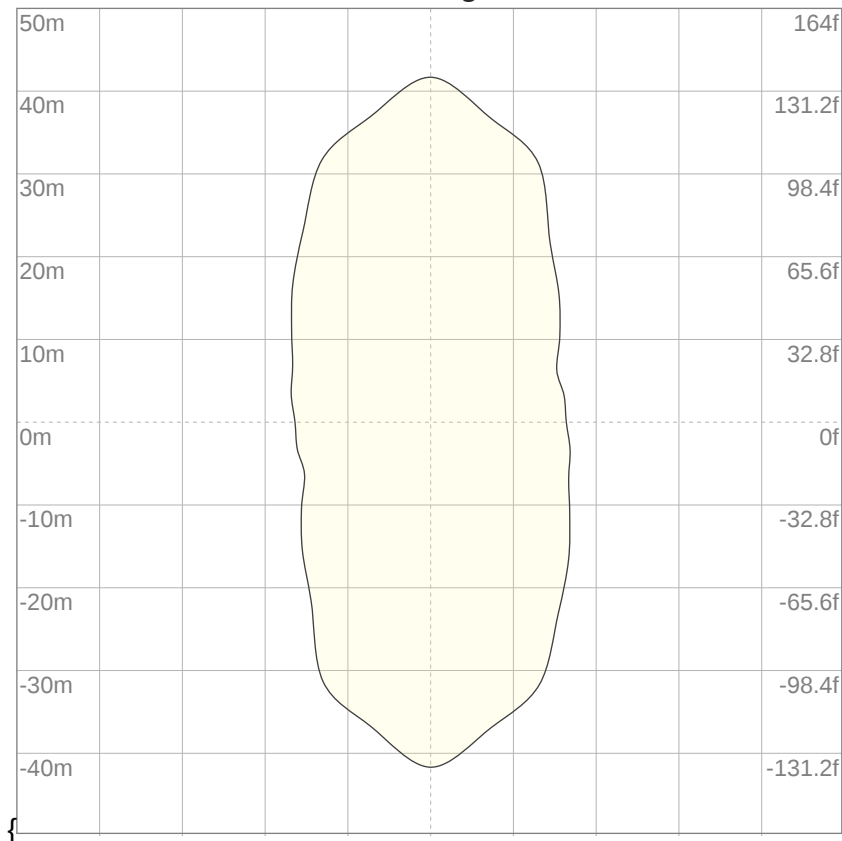

3%	10 lx
5%	16 lx
10%	32 lx
30%	96 lx
50%	160 lx

Conditions:

Number of c-planes: 16

Lux at center: 320 lx

*Lux distribution on a surface
when lamp is mounted at 1
meter from the surface.*

Mounting height: 1 Meters (3 Feet)

Viso Systems Aps – Copenhagen, Denmark – www.visosystems.com