

VISUAL COMFORT & Co.

Light efficiency:


104 Lumen/Watt

Output: 1906 lm

Peak: 519 cd

Power: 18.3 W


PF: 1.0

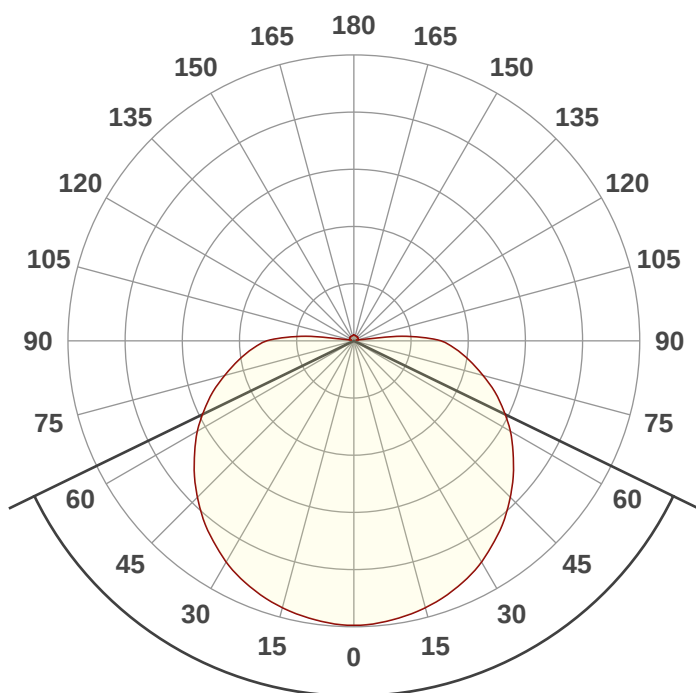

Beam angle

128.2°

Power

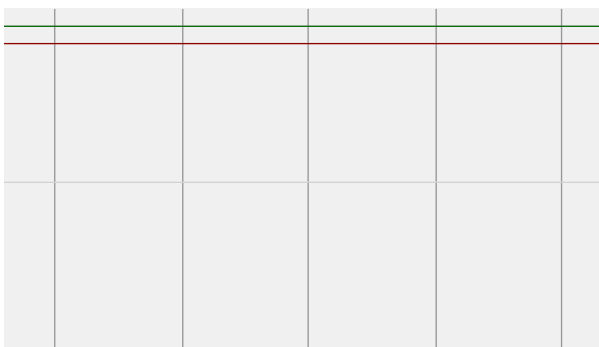

Voltage: 24.0 V

Current: 0.763

**A Frequency: 0
Hz**

No photo

Tracking number: [n/a](#)

Product name:

AB0056-02

Item number:

Date and time:


9/21/2022 10:02:07 AM

Description:

VISUAL COMFORT & Co.

ISO Diagrams

ISO candela diagram

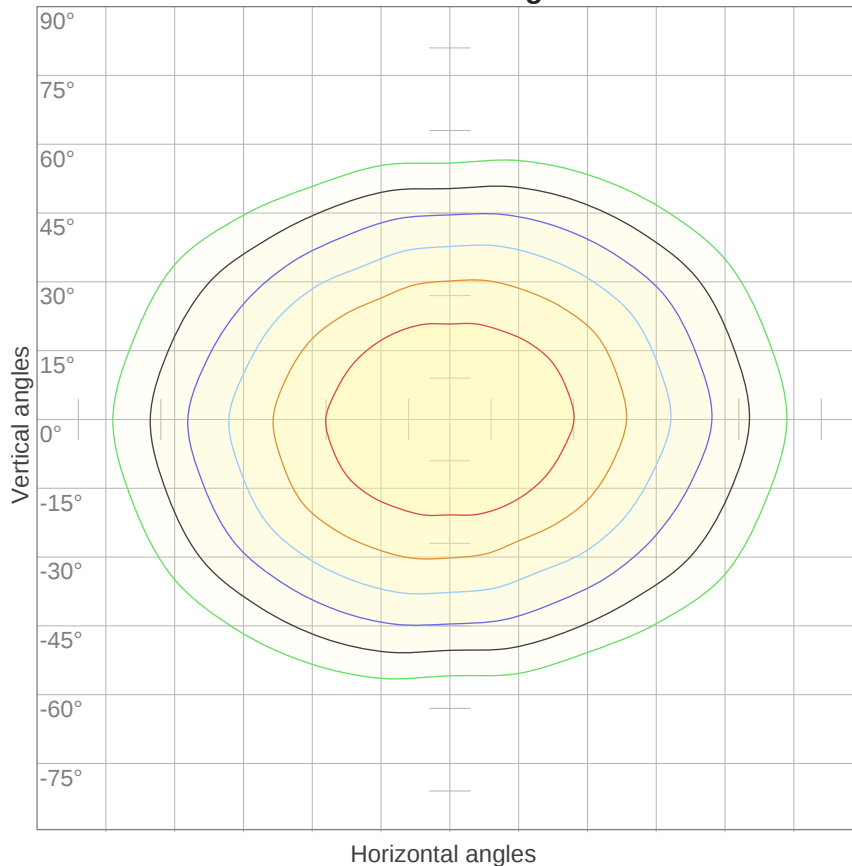


10%	26 cd
20%	52 cd
30%	78 cd
40%	104 cd
50%	130 cd
60%	155 cd
70%	181 cd
80%	207 cd
90%	233 cd

Conditions:

Number of c-planes: 12

Candela at center: 259 cd

ISO lux diagram

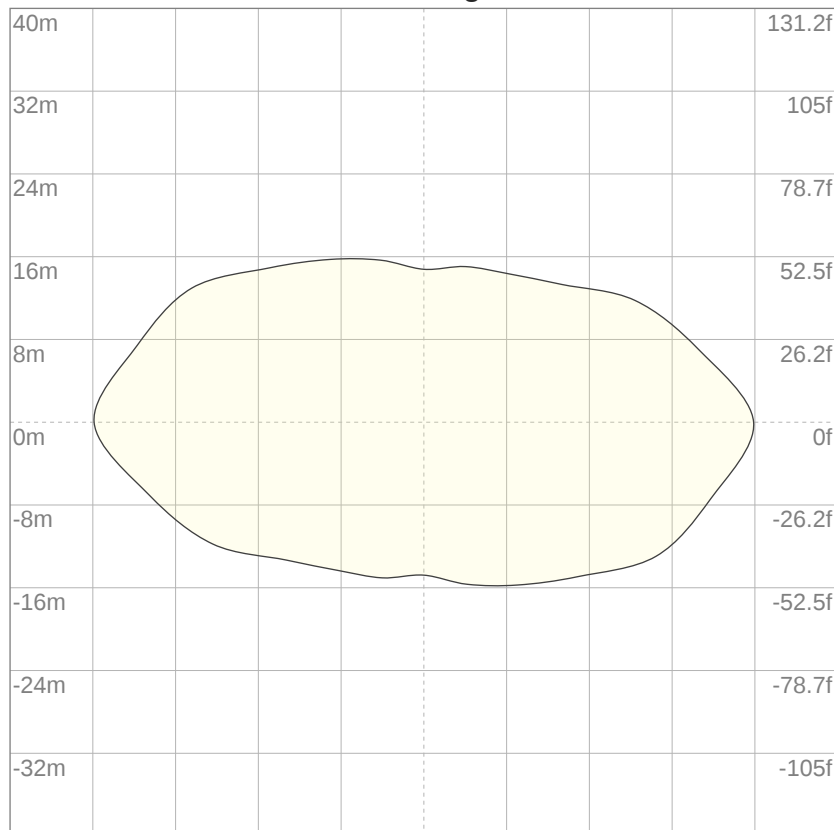

3%	77.7m lx
5%	0.130 lx
10%	0.259 lx
30%	0.777 lx
50%	1.30 lx

Conditions:

Number of c-planes: 12

Lux at center: 2.59 lx

*Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.*

Mounting height: 10 meters (33 feet)

Viso Systems Aps – Copenhagen, Denmark – www.visosystems.com