

VISUAL COMFORT & COMPANY TEST REPORT

SCOPE OF WORK

LED Performance Testing

MODEL NUMBER

700PRTEVT**-LED927

PROJECT NUMBER

G104349704

REPORT NUMBER

104349704CHI-017

ISSUE DATE

8/24/2020

REVISED DATE

None

TEST DATES

08/11/2020.

DOCUMENT CONTROL NUMBER

RTTDS-R-AMER-Test-3407

© 2017 INTERTEK



REPORT NUMBER

104349704CHI-017

MODEL NUMBER(s)

700PRTEVT**-LED927

REPORT RENDERED TO:

VISUAL COMFORT & COMPANY
7400 LINDER AVE
SKOKIE, IL 60077

STATEMENT OF LIMITATION

NVLAP Lab Code 600186-0. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

AUTHORIZATION

The testing performed was authorized by signed quote number Qu-01080748-1.

TEST STANDARDS

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

ANSI NEMA ANSLG C78.377: 2017: Specifications for the Chromaticity of Solid State Lighting (SSL) Products

In Charge of Testing:



Ian Smith
Engineer
Lighting Division

Reviewer:



Jeff Davis
NA Technical Lead
Lighting Division

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SAMPLE INFORMATION

REPORT NO. 104349704CHI-017


ITEMS RECEIVED

Item No.	Control No.	Model No.	Description	Type	Received
1	AH08062020034718-017	700PRTEVT**-LED927	EVERETT TABLE LAMP	Production	8/6/2020

TESTED SAMPLE CONFIGURATIONS

Config No.	Tested Model No.	Item Nos. Utilized
1	700PRTEVT**-LED927	1

SAMPLE PHOTOS - TESTED CONFIGURATIONS

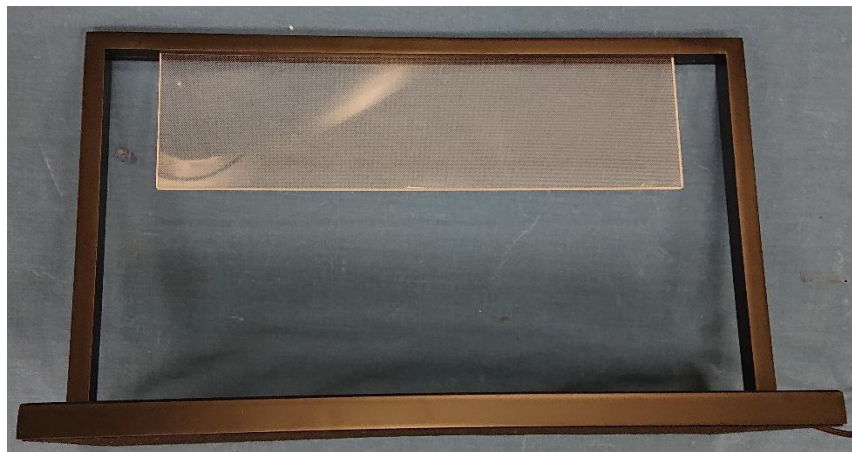

SUMMARY

REPORT NO. 104349704CHI-017

PRODUCT INFORMATION AND SUMMARY OF DATA

Product Model No.:	700PRTEVT**-LED927
Product Description:	EVERETT TABLE LAMP
LED Model No.:	LUMINUS MP-3030-1100-27-90
Driver Model No.:	XINSPower A122.1201000ID
Light Source:	LED

Criteria	Results	
	Goniophotometer	Integrating Sphere
Light Output (lumens)	512.6	536.8
Input Power (W) @ 120VAC (Vac)	10.06	9.98
Lumen Efficacy (lm/W)	51.0	53.8
Input Power Factor (I) @ 120VAC (Vac)	0.859	0.846

Criteria	Results
Input ATHD (%) @ 120VAC (Vac)	57.73
Correlated Color Temperature (K)	2699
Color Rendering Index - Ra (I)	93.1
Color Rendering Index - R9 (I)	59.9
Duv (I)	0.0002
Chromaticity Coordinate (x)	0.460
Chromaticity Coordinate (y)	0.411
Chromaticity Coordinate (u')	0.263
Chromaticity Coordinate (v')	0.528

TEST METHODS

SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS

No seasoning was performed in accordance with IESNA LM-79.

INTEGRATING SPHERE TESTING

A spectroradiometer and integrating sphere were used to measure the spectral distribution for each EUT resulting in photometric and colorimetric data. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position inside the sphere and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

A Type C Mirror Goniophotometer system was used to measure the luminous intensity (candela) at each angle of distribution for the EUT. Electrical measurements of the unit were measured using a power analyzer. Each EUT was operated at the rated input voltage of the system in its designated orientation. The ambient temperature was measured at a position near the EUT at equal height and stabilization procedures to LM-79 were followed.

TYPE C GONIOPHOTOMETER DISTRIBUTION TESTING

REPORT NO. 104349704CHI-017

Test Configuration	Tested Model No.	Pass/Fail/NA
1	700PRTEVT**-LED927	NA

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ()
Up	120.01	97.5	10.06	0.859

Light Output (lm)	Lumen Efficacy (lm/W)
512.6	51.0

INTENSITY SUMMARY - CANDELA


Angle	0	22.5	45	67.5	90
0	0	0	0	0	0
5	0	0	0	0	0
10	0	0	0	0	0
15	0	0	1	2	0
20	0	0	4	6	0
25	20	15	8	14	0
30	41	35	20	23	0
35	155	127	37	31	0
40	138	141	52	38	0
45	120	123	125	44	0
50	103	105	109	52	0
55	86	89	94	57	0
60	72	75	81	70	0
65	59	64	69	63	0
70	50	55	61	53	0
75	44	47	53	46	0
80	37	41	47	40	0
85	33	36	40	34	0
90	28	32	36	28	0
95	27	30	34	29	1
100	28	32	36	30	1
105	30	34	37	30	1
110	32	36	39	31	2
115	34	37	40	31	2
120	35	38	40	31	2
125	36	39	40	30	3
130	36	39	39	29	4
135	36	39	37	27	4
140	36	38	36	25	5
145	36	36	34	23	5
150	35	34	30	20	6
155	32	31	27	18	6
160	28	26	23	16	7
165	23	22	19	14	7
170	18	17	15	10	8
175	12	11	10	8	8
180	8	8	8	8	8

Entire luminous intensity matrix found in .IES file

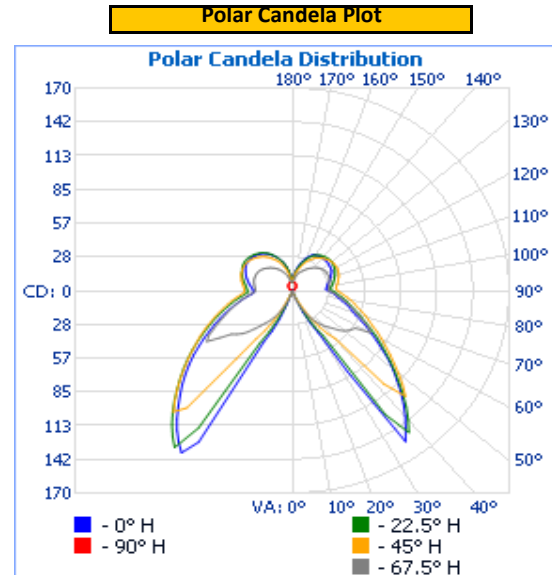

REPORT NO. 104349704CHI-017

ILLUMINANCE SUMMARY

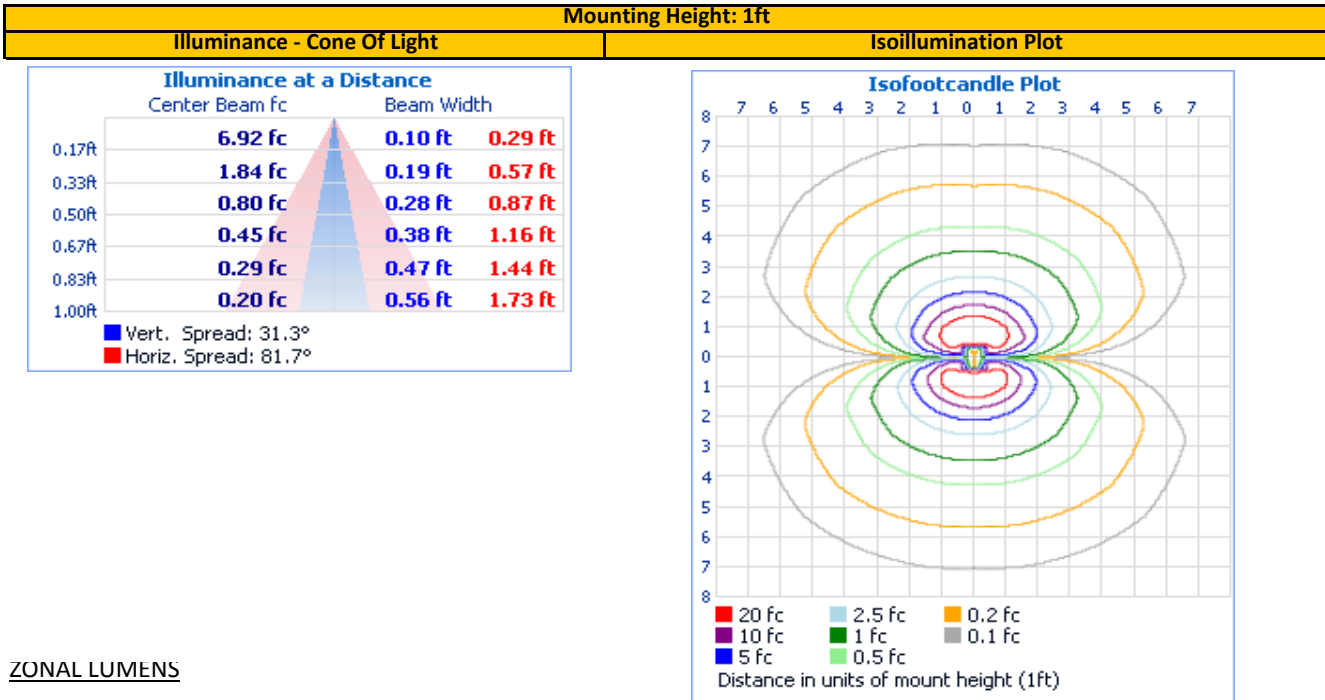

ZONAL LUMENS

Zonal Lumen Summary					
Zone	Lumens	Luminaire	Zone	Lumens	Total
0-30	8.2	1.6%	90-100	31.3	6.1%
0-40	50.8	9.9%	100-110	32.8	6.4%
0-60	186.2	36.3%	110-120	32.7	6.4%
60-90	139.6	27.2%	120-130	30.0	5.8%
70-100	112.3	21.9%	130-140	24.7	4.8%
90-120	96.8	18.9%	140-150	18.1	3.5%
0-90	325.8	63.6%	150-160	11.1	2.2%
90-180	186.8	36.4%	160-170	5.0	1.0%
0-180	512.6	100.0%	170-180	1.0	0.2%

INTEGRATING SPHERE TESTING

REPORT NO. 104349704CHI-017

Test Configuration	Tested Model No.	Pass/Fail/NA
1	700PRTEVT**-LED927	NA

PHOTOMETRIC, COLORIMETRIC, AND ELECTRICAL MEASUREMENTS (25°C +/- 1°C)


Base Orientation
Up

Input Voltage (Vac)	Input Current (mA)	Input Power (W)	Input Power Factor ()	Input ATHD (%)
120.05	98.2	9.98	0.846	57.73

Measured at 120.05(Vac)

Light Output (lm)	Lumen Efficacy (lm/W)	CCT (K)	CRI - Ra ()	CRI - R9 ()
536.8	53.8	2699	93.1	59.9

Duv ()	1931 Chrom (x)	1931 Chrom (y)	1976 Chrom (u')	1976 Chrom (v')
0.0002	0.460	0.411	0.263	0.528

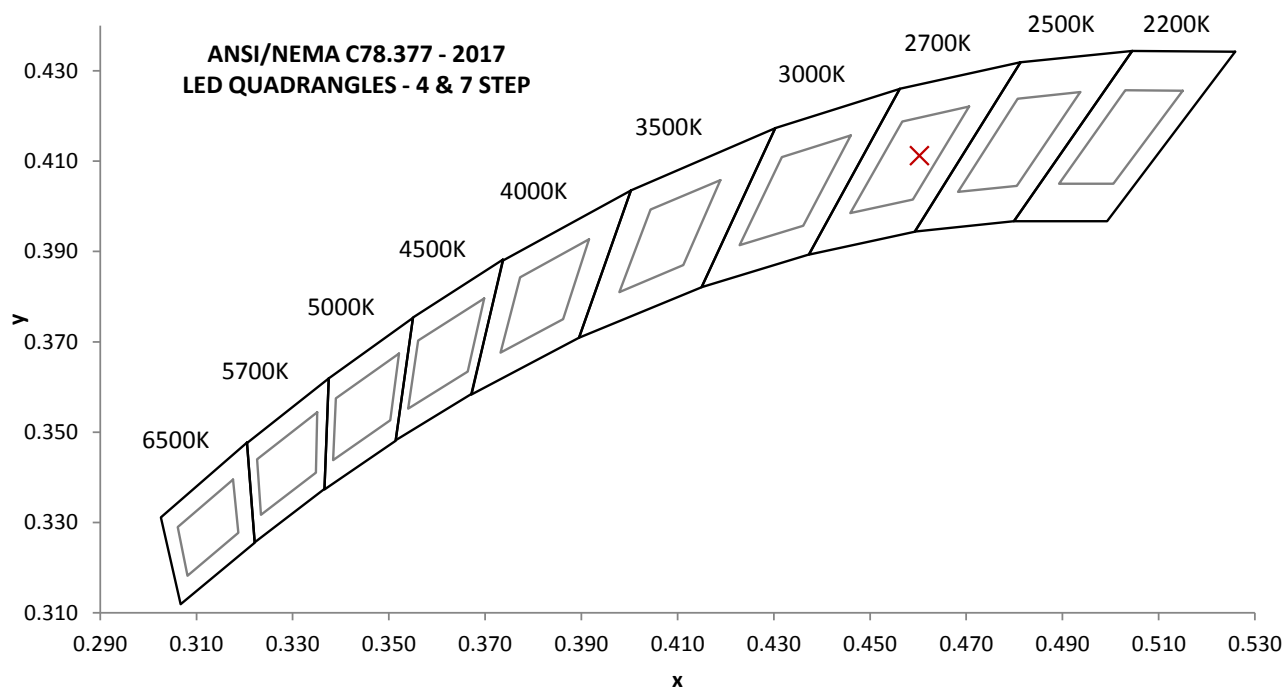


REPORT NO. 104349704CHI-017

SPECTRAL DISTRIBUTION OVER WAVELENGTHS

nm	mW/nm		nm	mW/nm		nm	mW/nm		nm	mW/nm
350	0.0		460	3.9		570	7.8		680	6.3
355	0.0		465	3.3		575	8.2		685	5.6
360	0.1		470	3.1		580	8.6		690	5.0
365	0.0		475	2.7		585	9.1		695	4.4
370	0.1		480	2.4		590	9.6		700	3.9
375	0.0		485	2.5		595	10.1		705	3.4
380	0.0		490	2.8		600	10.5		710	2.9
385	0.1		495	3.1		605	11.0		715	2.5
390	0.0		500	3.5		610	11.4		720	2.1
395	0.0		505	3.9		615	11.6		725	1.8
400	0.0		510	4.3		620	11.7		730	1.5
405	0.0		515	4.7		625	11.7		735	1.3
410	0.0		520	4.9		630	11.7		740	1.2
415	0.1		525	5.2		635	11.5		745	1.0
420	0.1		530	5.5		640	11.2		750	0.8
425	0.1		535	5.7		645	10.7		755	0.8
430	0.3		540	6.0		650	10.3		760	0.7
435	0.5		545	6.3		655	9.6		765	0.5
440	0.9		550	6.6		660	8.9		770	0.5
445	1.8		555	6.9		665	8.2		775	0.4
450	3.4		560	7.1		670	7.5		780	0.4
455	4.6		565	7.5		675	6.9		---	---

Without correction of sample absorption.

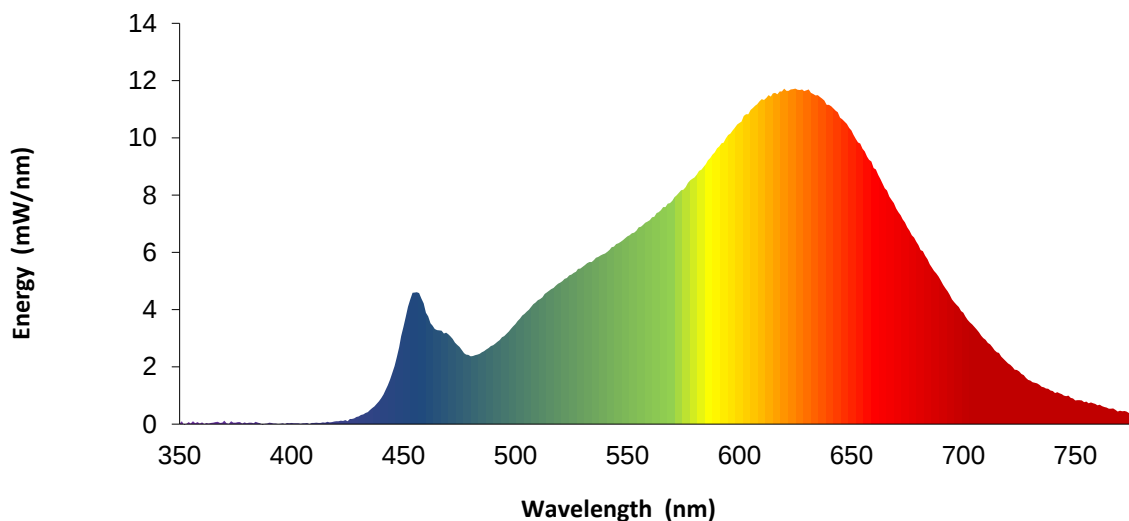

Portrayed color in graphic is estimated by wavelength (nm) and may not be exact - it is a visual representation only

EQUIPMENT LIST

REPORT NO. 104349704CHI-017

#	Equipment	Model No	Control No.	Last Cal	Cal Due
1	Yokogawa Power Meter	WT210	146919	7/1/2020	7/1/2021
2	Omega Thermometer	DPI8-C24	146920	10/3/2019	10/3/2020
3	LSI High Speed Mirror Goniometer	6440T	146928	VBU	VBU
4	Newport Thermohygrometer	iServer	146957	12/2/2019	12/2/2020
5	Pacific AC Power Supply	118-ACX	CHI0153	VBU	VBU
6	Newport Humidity Recorder	iServer	CHI0456	10/11/2019	10/11/2020
7	Labsphere Spectroradiometer	CDS-600	146923	VBU	VBU
8	2M Rotating Sphere	7660-ROT	146923	VBU	VBU
9	Omega thermometer	USB TC08	EQAH002615	4/7/2020	4/7/2021
10	Ametek DC Power Supply	XFR150-8	1468464	VBU	VBU
11	Yokogawa Power Meter	WT210	146880	10/2/2019	10/2/2020
12	Chroma Power Supply	61604	CHI0371	VBU	VBU
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					

Note: Standard sources listed above are traceable to NIST: National Institute of Standards and Technology

REVISION HISTORY

#	Revision Date	Updated By	Reviewed By	Description of Change
---	None	---	---	---
---	---	---	---	---
---	---	---	---	---