

# VISUAL COMFORT GROUP TEST REPORT

## SCOPE OF WORK

Electrical and Photometric tests as required to the IESNA test standard.

## MODEL NUMBER

700WSFNALI-LED

## REPORT NUMBER

103982892CHI-034

## ISSUE DATE

July 9, 2019

## REVISION DATE

None

## DOCUMENT CONTROL NUMBER

TBD

© 2017 INTERTEK



**REPORT NO.: 103982892CHI-034**

**REPORT DATE: July 9, 2019**

**TEST REPORT**

**TEST OF ONE LED WALL LUMINAIRE**

**MODEL NO. 700WSFNALI-LED  
LED MODEL NO. EVERLIGHT 62-217D  
DRIVER MODEL NO. LTF DA15W350C1042-3001**

**RENDERED TO:**

**VISUAL COMFORT GROUP  
7400 LINDER AVE.  
SKOKIE, IL 60077**

**AUTHORIZATION**

The testing performed was authorized by signed quote number Qu-00981438-0.

**STANDARDS USED**

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting  
ANSI NEMA ANSLG C78.377: 2015: Specifications of the Chromaticity of Solid State Lighting Products

**DESCRIPTION OF SAMPLE**

The client submitted one production sample of model number 700WSFNALI-LED. The sample was received by Intertek on June 14, 2019 in undamaged condition and one sample was tested as received. The sample designation was AH06142019092403-34.

**DATE OF TESTS**

June 17, 2019 through July 3, 2019.

**REPORT NO.: 103982892CHI-034**

**TEST REPORT**

**REPORT DATE: July 9, 2019**

**SUMMARY**

|                     |                    |
|---------------------|--------------------|
| <b>MODEL NO:</b>    | 700WSFNALI-LED     |
| <b>DESCRIPTION:</b> | LED wall luminaire |

| CRITERIA                       | RESULTS            |                 |
|--------------------------------|--------------------|-----------------|
|                                | INTEGRATING SPHERE | GONIOPHOTOMETER |
| Lumen Output (lumens)          | 471.3              | 475.6           |
| Input Power (W) @ 120 (VAC)    | 7.99               | 7.99            |
| Lumen Efficacy (lm/W)          | 59.0               | 59.5            |
| Input Power Factor @ 120 (VAC) | 0.911              | 0.912           |

| CRITERIA                           | RESULTS |
|------------------------------------|---------|
| Input Current ATHD (%) @ 120 (VAC) | 21.94   |
| Correlated Color Temperature (K)   | 2769    |
| Color Rendering Index - Ra         | 92.9    |
| Color Rendering - R9               | 56.2    |
| DUV                                | 0.0012  |
| Chromaticity Coordinate (x)        | 0.457   |
| Chromaticity Coordinate (y)        | 0.414   |
| Chromaticity Coordinate (u')       | 0.259   |
| Chromaticity Coordinate (v')       | 0.528   |

**REPORT NO.: 103982892CHI-034**

**REPORT DATE: July 9, 2019**

**TEST REPORT**

**EQUIPMENT LIST**

| EQUIPMENT USED                   | MODEL NO. | CONTROL NO. | LAST CAL DATE | CAL DUE DATE |
|----------------------------------|-----------|-------------|---------------|--------------|
| Yokogawa Power Meter             | WT210     | 146919      | 7/1/2019      | 7/1/2020     |
| Omega Thermometer                | DPI8-C24  | 146920      | 10/4/2018     | 10/4/2019    |
| LSI High Speed Mirror Goniometer | 6440T     | 146928      | VBV           | VBV          |
| Newport Thermohygrometer         | iServer   | 146957      | 12/11/2018    | 12/11/2019   |
| Pacific, AC power supply         | 118-ACX   | CHI0358     | VBV           | VBV          |
| Labsphere Spectroradiometer      | CDS1100   | 146137      | VBV           | VBV          |
| 3 Meter Sphere                   | SPR600    | CHI0088     | VBV           | VBV          |
| Elgar AC Power Supply            | CW1251    | 146112      | VBV           | VBV          |
| Sorenson DC Power Supply         | XFR150-8  | 146846      | VBV           | VBV          |
| Newport Humidity Recorder        | iTHX-SD   | 146961      | 7/23/2018     | 7/23/2019    |
| Yokogawa Power Meter             | WT1600    | 146769      | 4/3/2019      | 4/3/2020     |
| Extech K Temperature Meter       | SD200     | CHI0207     | 4/3/2019      | 4/3/2020     |

**REPORT NO.: 103982892CHI-034**

**REPORT DATE: July 9, 2019**

**TEST REPORT**

**TEST METHODS**

**SEASONING IN SAMPLE ORIENTATION - LED PRODUCTS**

No seasoning was performed in accordance with IESNA LM-79.

**PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - INTEGRATING SPHERE METHOD**

A Spectroradiometer and integrating sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation. Each SSL unit was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

The calibration of the sphere photometer-spectroradiometer system is traceable to the National Institute of Standards and Technology.

**PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD**

A Type C Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for the SSL sample.

Ambient temperature was measured equal to the height of the sample mounted on the goniometer equipment. The SSL sample was operated on the client provided driver at rated input volts in its designated orientation. The SSL sample was allowed to stabilize for at least thirty minutes before measurements were made. Stabilization procedures to LM-79 were followed. Electrical measurements including voltage, current, and power were measured using a power analyzer.

REPORT NO.: 103982892CHI-034

REPORT DATE: July 9, 2019

TEST REPORT


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

| INTERTEK CONTROL NO. | BASE POSITION | INPUT VOLTAGE (VAC) | INPUT CURRENT (mA) | INPUT POWER (W) | INPUT POWER FACTOR | LIGHT OUTPUT (lm) | LUMEN EFFICACY (lm/W) |
|----------------------|---------------|---------------------|--------------------|-----------------|--------------------|-------------------|-----------------------|
| AH06142019092403-34  | Horizontal    | 120.0               | 73.0               | 7.99            | 0.912              | 475.6             | 59.5                  |

INTENSITY SUMMARY - CANDELAS

| Angle | 0   | 22.5 | 45  | 67.5 | 90 |
|-------|-----|------|-----|------|----|
| 0     | 4   | 4    | 4   | 4    | 4  |
| 5     | 12  | 13   | 9   | 5    | 6  |
| 10    | 38  | 37   | 24  | 12   | 10 |
| 15    | 72  | 67   | 45  | 22   | 15 |
| 20    | 107 | 98   | 67  | 33   | 20 |
| 25    | 137 | 121  | 89  | 45   | 25 |
| 30    | 113 | 100  | 88  | 53   | 29 |
| 35    | 68  | 65   | 67  | 50   | 32 |
| 40    | 46  | 44   | 44  | 40   | 32 |
| 45    | 50  | 46   | 39  | 32   | 31 |
| 50    | 51  | 48   | 40  | 30   | 29 |
| 55    | 53  | 49   | 40  | 30   | 26 |
| 60    | 55  | 51   | 40  | 29   | 23 |
| 65    | 56  | 52   | 41  | 28   | 21 |
| 70    | 56  | 52   | 41  | 28   | 18 |
| 75    | 57  | 52   | 41  | 27   | 17 |
| 80    | 57  | 52   | 41  | 27   | 15 |
| 85    | 57  | 53   | 41  | 26   | 14 |
| 90    | 58  | 53   | 41  | 26   | 13 |
| 95    | 58  | 53   | 41  | 26   | 14 |
| 100   | 57  | 53   | 41  | 27   | 15 |
| 105   | 57  | 52   | 42  | 28   | 17 |
| 110   | 57  | 52   | 42  | 29   | 19 |
| 115   | 57  | 52   | 42  | 30   | 21 |
| 120   | 57  | 53   | 42  | 31   | 23 |
| 125   | 56  | 52   | 42  | 32   | 26 |
| 130   | 53  | 50   | 42  | 32   | 29 |
| 135   | 52  | 49   | 41  | 33   | 31 |
| 140   | 50  | 46   | 43  | 40   | 33 |
| 145   | 46  | 60   | 62  | 53   | 33 |
| 150   | 85  | 95   | 88  | 61   | 31 |
| 155   | 126 | 125  | 100 | 57   | 27 |
| 160   | 119 | 108  | 81  | 45   | 22 |
| 165   | 89  | 78   | 58  | 32   | 17 |
| 170   | 55  | 48   | 36  | 22   | 12 |
| 175   | 24  | 21   | 18  | 12   | 8  |
| 180   | 6   | 6    | 6   | 6    | 6  |

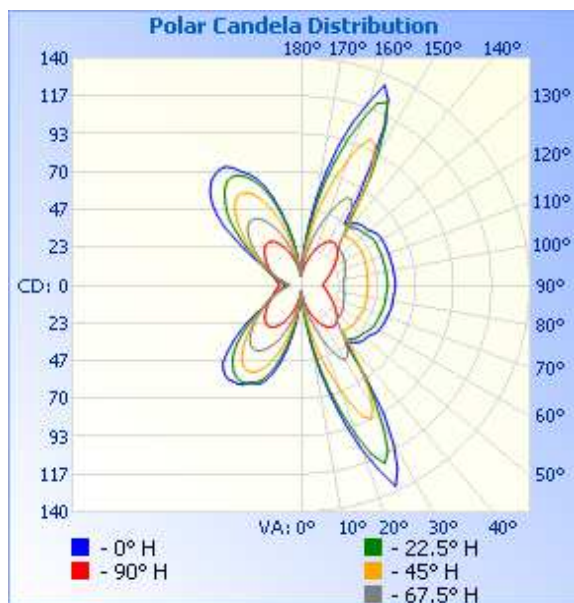

REPORT NO.: 103982892CHI-034



REPORT DATE: July 9, 2019

TEST REPORT

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - DISTRIBUTION METHOD (25°C +/- 1°C)

| MOUNTING HEIGHT: 10ft       |                      |
|-----------------------------|----------------------|
| ILLUMINANCE - CONE OF LIGHT | ISOILLUMINATION PLOT |

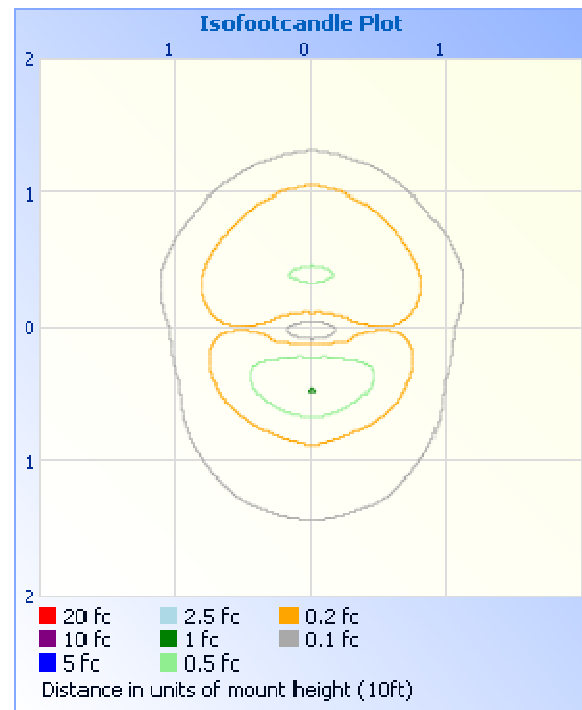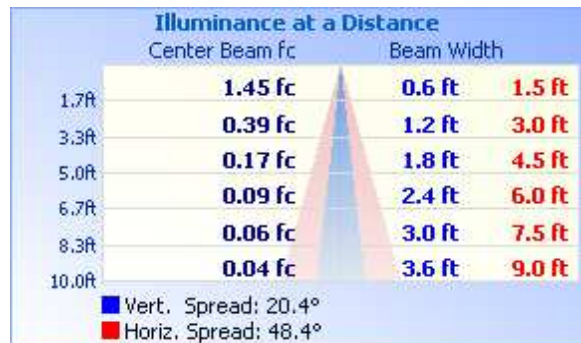

ZONAL LUMEN SUMMARY AND PERCENTAGES

| ZONE   | LUMENS | % LUMINAIRE |
|--------|--------|-------------|
| 0-30   | 43.6   | 9.2         |
| 0-40   | 79.7   | 16.8        |
| 0-60   | 146.9  | 30.9        |
| 60-90  | 85.1   | 17.9        |
| 70-100 | 81.4   | 17.1        |
| 90-120 | 86.9   | 18.3        |
| 0-90   | 232.0  | 48.8        |
| 90-180 | 243.6  | 51.2        |
| 0-180  | 475.6  | 100.0       |

| ZONE    | LUMENS | % LUMINAIRE |
|---------|--------|-------------|
| 0-10    | 1.4    | 0.3         |
| 10-20   | 11.7   | 2.5         |
| 20-30   | 30.5   | 6.4         |
| 30-40   | 36.1   | 7.6         |
| 40-50   | 34.4   | 7.2         |
| 50-60   | 32.8   | 6.9         |
| 60-70   | 30.2   | 6.4         |
| 70-80   | 28.4   | 6.0         |
| 80-90   | 26.5   | 5.6         |
| 90-100  | 26.6   | 5.6         |
| 100-110 | 28.8   | 6.1         |
| 110-120 | 31.5   | 6.6         |
| 120-130 | 35.3   | 7.4         |
| 130-140 | 37.1   | 7.8         |
| 140-150 | 37.2   | 7.8         |
| 150-160 | 32.3   | 6.8         |
| 160-170 | 13.1   | 2.8         |
| 170-180 | 1.7    | 0.4         |

REPORT NO.: 103982892CHI-034

REPORT DATE: July 9, 2019

TEST REPORT


RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - INTEGRATING SPHERE METHOD (25°C +/- 1°C)

| INTERTEK CONTROL NO. | BASE POSITION | INPUT VOLTAGE (VAC) | INPUT CURRENT (mA) | INPUT POWER (W) | INPUT POWER FACTOR | INPUT CURRENT ATHD (%) |
|----------------------|---------------|---------------------|--------------------|-----------------|--------------------|------------------------|
| AH06142019092403-34  | Horizontal    | 120.00              | 73.13              | 7.99            | 0.911              | 21.94                  |

| LIGHT OUTPUT (lm) | LUMEN EFFICACY (lm/W) | CORRELATED COLOR TEMPERATURE - CCT (K) | CRI - Ra | CRI - R9 | DUV    |
|-------------------|-----------------------|----------------------------------------|----------|----------|--------|
| 471.3             | 59.0                  | 2769                                   | 92.9     | 56.2     | 0.0012 |

| CIE 1931 CHROMATICITY COORDINATE (x) | CIE 1931 CHROMATICITY COORDINATE (y) | CIE 1976 CHROMATICITY COORDINATE (u') | CIE 1976 CHROMATICITY COORDINATE (v') |
|--------------------------------------|--------------------------------------|---------------------------------------|---------------------------------------|
| 0.457                                | 0.414                                | 0.259                                 | 0.528                                 |

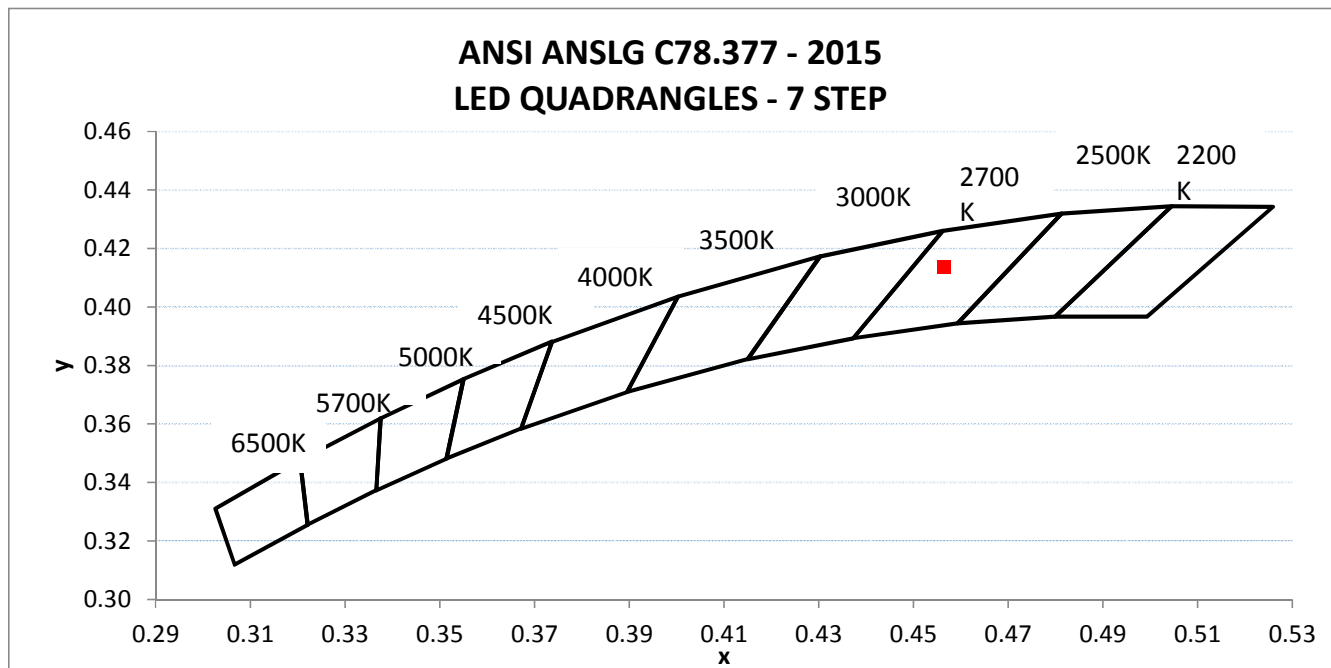

REPORT NO.: 103982892CHI-034

REPORT DATE: July 9, 2019


TEST REPORT

RESULTS OF TESTS

PHOTOMETRIC AND ELECTRICAL MEASUREMENTS - INTEGRATING SPHERE METHOD (25°C +/- 1°C)

| SPECTRAL DISTRIBUTION OVER VISIBLE WAVELENGTHS* |       |     |       |     |       |     |       |
|-------------------------------------------------|-------|-----|-------|-----|-------|-----|-------|
| nm                                              | mW/nm | nm  | mW/nm | nm  | mW/nm | nm  | mW/nm |
| 350                                             | 0.036 | 460 | 2.764 | 570 | 6.486 | 680 | 4.605 |
| 355                                             | 0.034 | 465 | 2.327 | 575 | 6.803 | 685 | 4.118 |
| 360                                             | 0.035 | 470 | 2.242 | 580 | 7.131 | 690 | 3.656 |
| 365                                             | 0.031 | 475 | 2.041 | 585 | 7.511 | 695 | 3.230 |
| 370                                             | 0.029 | 480 | 2.022 | 590 | 7.876 | 700 | 2.826 |
| 375                                             | 0.026 | 485 | 2.304 | 595 | 8.293 | 705 | 2.475 |
| 380                                             | 0.023 | 490 | 2.669 | 600 | 8.658 | 710 | 2.151 |
| 385                                             | 0.022 | 495 | 3.036 | 605 | 8.989 | 715 | 1.871 |
| 390                                             | 0.021 | 500 | 3.407 | 610 | 9.260 | 720 | 1.618 |
| 395                                             | 0.021 | 505 | 3.695 | 615 | 9.443 | 725 | 1.396 |
| 400                                             | 0.021 | 510 | 3.915 | 620 | 9.534 | 730 | 1.203 |
| 405                                             | 0.027 | 515 | 4.081 | 625 | 9.516 | 735 | 1.032 |
| 410                                             | 0.043 | 520 | 4.213 | 630 | 9.360 | 740 | 0.886 |
| 415                                             | 0.081 | 525 | 4.360 | 635 | 9.134 | 745 | 0.760 |
| 420                                             | 0.154 | 530 | 4.534 | 640 | 8.789 | 750 | 0.650 |
| 425                                             | 0.273 | 535 | 4.731 | 645 | 8.374 | 755 | 0.558 |
| 430                                             | 0.452 | 540 | 4.954 | 650 | 7.904 | 760 | 0.477 |
| 435                                             | 0.715 | 545 | 5.173 | 655 | 7.382 | 765 | 0.406 |
| 440                                             | 1.108 | 550 | 5.426 | 660 | 6.833 | 770 | 0.347 |
| 445                                             | 1.796 | 555 | 5.682 | 665 | 6.265 | 775 | 0.296 |
| 450                                             | 2.857 | 560 | 5.945 | 670 | 5.690 | 780 | 0.253 |
| 455                                             | 3.376 | 565 | 6.193 | 675 | 5.141 |     |       |

\*Without correction of sample absorption.

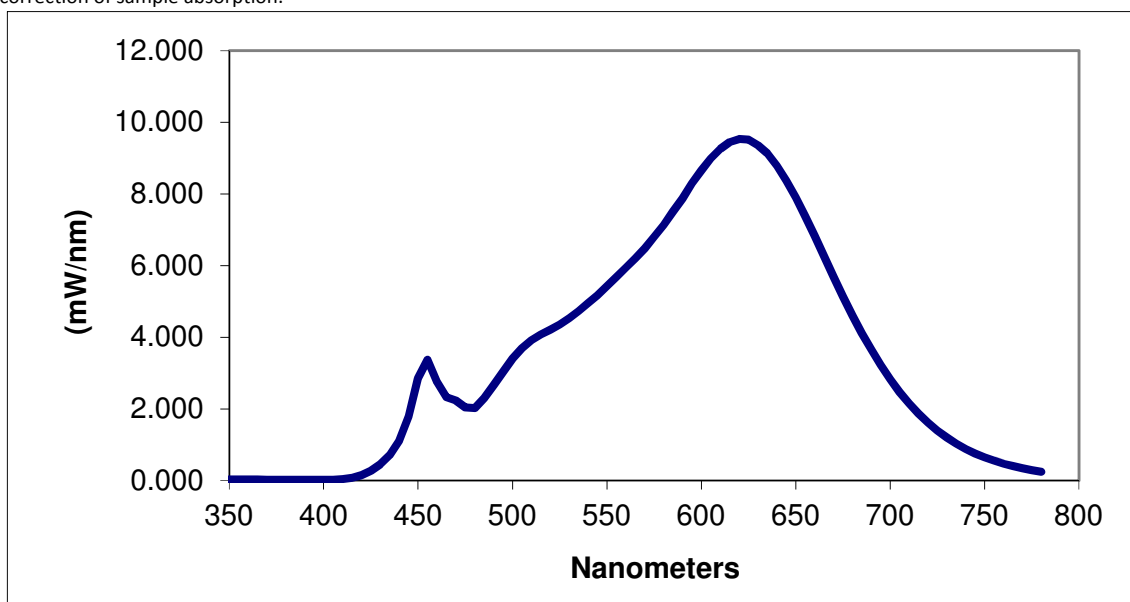


End Of Test Results

**REPORT NO.: 103982892CHI-034**

**REPORT DATE: July 9, 2019**

**TEST REPORT**

**PICTURES**

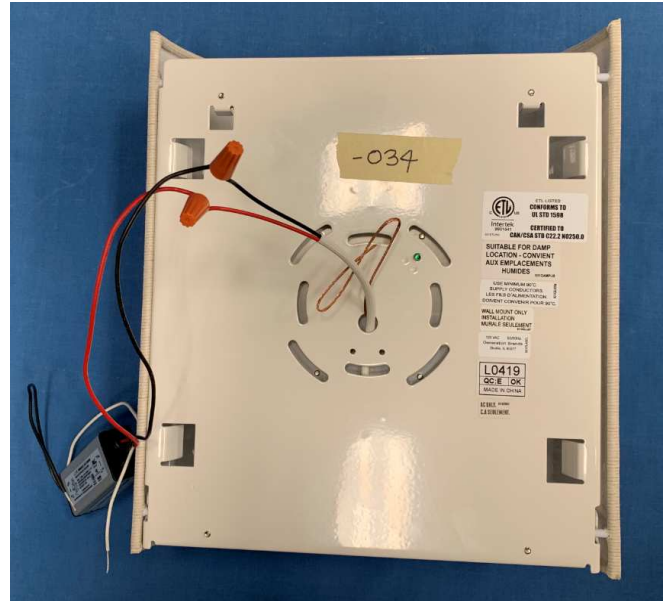

**CONCLUSION**

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:

Hector Huitron  
Associate Engineer  
Lighting Division

Report Reviewed By:

Timothy Quigley  
Project Engineer  
Lighting Division

Attachments: IES File

**REVISION HISTORY**

| JOB NUMBER | DATE OF REVISION | PROJECT HANDLER | REVIEWED BY | REVISION NOTE |
|------------|------------------|-----------------|-------------|---------------|
| None       |                  |                 |             |               |