

Visual Comfort and Company

TEST REPORT

SCOPE OF WORK

LM-79 testing report

REPORT NUMBER

220706027GZU-003

ISSUE DATE

12 July 2022

REVISION DATE

None

NUMBER OF PAGES

13

DOCUMENT CONTROL NUMBER

Report format for LM-79:2008_F

© 2021 INTERTEK



Report No.: 220706027GZU-003

TEST REPORT

TEST OF ONE LED LUMINAIRE

MODEL NO. 700PLUF24x-LED927

RENDERED TO

Visual Comfort and Company

Contact Name: Tess Gallagher

7400 LINDER AVE. SKOKIE, IL, 60077

Email: Tgallagher@visualcomfortco.com

Phone No.: 8474104774

TEST: Electrical and Photometric as required to the IES LM-79 test standard.

STATEMENT OF LIMITATION: The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

AUTHORIZATION: The testing performed was authorized by signed quote number: QGZ220704064.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IES LM-79: 2008 Approved Method for the Electrical and Photometric Measurements of Solid-State Lighting Products

ANSI C78.377:2017 Specifications of the Chromaticity of Solid State Lighting Products

DESCRIPTION OF SAMPLE: The client submitted one sample of model 700PLUF24x-LED927. The sample was received, in undamaged condition. The sample designation was S220706027-005.

DATES OF TESTS: 11 July 2022

ISSUED BY: Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

TEST LOCATION: Room 02, & 101/E201/E301/E401/E501/E601/E701/E801 of Room 01 1-8/F., No. 7-2. Caipin Road, Science City, GETDD, Guangzhou, Guangdong, China

***** End of Page *****

TEST REPORT

SUMMARY

Model Number:	700PLUF24x-LED927 (Remark: "X" denote other appearance colors for the characters that change)
Description:	LED Luminaries
Brand Name:	--

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Criteria	Result
Total Lumen Output	1130.81 lm
Total Power	17.41 W
Luminaire Efficacy	64.93 lm/W
S/MH(C0/180)	1.49
S/MH(C90/270)	10.46
Correlated Color Temperature (CCT)	2529 K
Color Rendering Index (CRI)	97
R9	96
Chromaticity Coordinate (x)	0.4714
Chromaticity Coordinate (y)	0.4084
Chromaticity Coordinate (u')	0.2710
Chromaticity Coordinate (v')	0.5282

Remark:

Measurement uncertainty for applicable tests has been established.

***** End of Page *****

TEST REPORT

EQUIPMENT LIST

Equipment Used	Model Number	Control Number
Goniophotometer System	Go-R5000	SA063-16
KONICA MINOLTA - Illuminance meter	CX-2B_WL	SA063-16-01
Standard Lamp	DS215S	SA063-16-06
Digital Power Meter	PLM3000	SA063-16-09
AC power source for Goniophotometer	PCR-1000WH	SA063-16-10
Temperature Meter	RC-HT601A	SA047-62

GENERAL REMARK

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

When determining for test conclusion, measurement uncertainty of tests has been considered.

Throughout this report a ☐ comma ☒ point is used as the decimal separator.

***** End of Page *****

TEST REPORT

TEST METHOD

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IES LM-79

Light Distribution and Output Measurements

Light Distribution and total light output (luminous flux) were measured using a Go-R5000 Type-C Rotating Mirror Goniophotometer. Temperature 25°C and relative humidity of 60% was measured at a position in the testing laboratory.

The lamp rotates only around the fixed vertical axle in the prescribed burning position. The lamp and mirror permit the measurement of luminous intensity at the direction of any horizontal or vertical angle without tilting the lamp. The lamp was allowed to stabilize before measurements were made.

Chromaticity Measurements

Chromaticity was measured using a 2 meters integrating sphere spectral lamp measurement system, 4 π geometry, with an interior coating reflectance no less than 95 %. Temperature was measured at a position inside the sphere shielded from direct light. Relative humidity of 65% was measured at a position in the testing laboratory.

Spectral radiant flux measurements were made using spectroradiometer attached to the detector port of the integrating sphere. Each lamp was allowed to stabilise before measurements were made. The calibration of the integrating sphere spectroradiometer system is by the reference/standard lamps which are traceable to National Institute of Metrology P.R. CHINA. Lamp efficacy (lumens per watt) for each lamp model was then computed based on the luminous flux result. Electrical measurements including voltage, power and power factor were measured using YOKOGAWA - Digital Power Meter., model WT210.

Correction factor (self-absorption) has been considered when doing measurement.

Standard lamp used for Goniophotometer method:

Model: D908S

Current: 7.255A

Standard lamp used for integrating sphere:

Model: S82134

Current: 1.830

***** End of Page *****


TEST REPORT

RESULTS OF TESTS

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Spectral Distribution over Visible Wavelengths

nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm
380	0.0000	480	0.0100	580	0.0315	680	0.0356	780	0.0003
385	0.0000	485	0.0120	585	0.0330	685	0.0330		
390	0.0000	490	0.0112	590	0.0347	690	0.0292		
395	0.0004	495	0.0124	595	0.0372	695	0.0272		
400	0.0000	500	0.0141	600	0.0399	700	0.0236		
405	0.0005	505	0.0157	605	0.0423	705	0.0209		
410	0.0000	510	0.0172	610	0.0452	710	0.0186		
415	0.0000	515	0.0184	615	0.0481	715	0.0165		
420	0.0005	520	0.0196	620	0.0504	720	0.0148		
425	0.0001	525	0.0203	625	0.0525	725	0.0130		
430	0.0010	530	0.0216	630	0.0535	730	0.0118		
435	0.0023	535	0.0226	635	0.0542	735	0.0097		
440	0.0036	540	0.0234	640	0.0541	740	0.0088		
445	0.0065	545	0.0245	645	0.0535	745	0.0075		
450	0.0123	550	0.0253	650	0.0519	750	0.0063		
455	0.0161	555	0.0263	655	0.0502	755	0.0060		
460	0.0138	560	0.0272	660	0.0477	760	0.0049		
465	0.0120	565	0.0278	665	0.0453	765	0.0038		
470	0.0122	570	0.0290	670	0.0424	770	0.0032		
475	0.0103	575	0.0299	675	0.0379	775	0.0031		

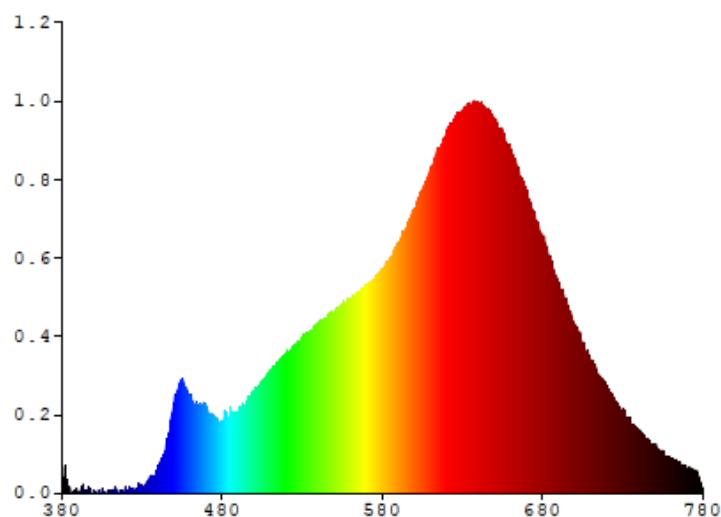

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Total operation burning time: 60 minutes

Stabilization time: 45 minutes


Photometric Measurements at 25°C – Integrating Sphere Method

Intertek Sample No.	Base Orientation	Correlated Color Temperatur e (K)	CRI	R9	CIE 31'	CIE 31'	CIE 76'	CIE 76'
					Chromaticit y	Chromaticit y	Chromaticit y	Chromaticit y
					Coordinate (x)	Coordinate (y)	Coordinate (u')	Coordinate (v')
700PLUF24x-LED927								
S2207060 27-005	--	2529	97	96	0.4714	0.4084	0.2710	0.5282

Photometric and Electrical Measurements at 25°C – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage (Vac)	Input Current (mA)	Input Power (Watts)	Input Power Factor	Absolute	Lumen
						Luminous Flux (Lumens)	Efficacy (Lumens Per Watt)
700PLUF24x-LED927							
S2207060 27-005	--	120.0	150.1	17.41	0.966	1130.81	64.93

Intensity (Candlepower) Summary at 25°C – Candelas

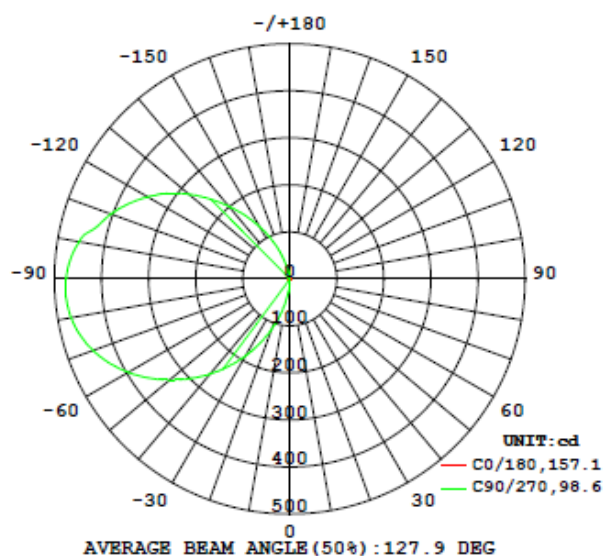

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Intensity (Candlepower) Summary at 25°C - Candelas

V \ H(°)	0	22.5	45	67.5	90
0	4.6	4.6	4.6	4.6	4.6
5	4.6	2.5	2.4	2.2	2.3
10	4.5	2.4	2.2	2.0	2.0
15	4.5	2.3	2.0	1.7	1.7
20	4.4	2.3	1.8	1.4	1.3
25	4.3	2.2	1.5	1.1	1.1
30	4.1	2.1	1.3	0.9	0.8
35	4.0	1.9	1.1	0.7	0.7
40	3.8	1.8	0.9	0.6	0.6
45	3.5	1.6	0.7	0.6	0.6
50	3.3	1.4	0.6	0.6	0.6
55	3.1	1.1	0.6	0.6	0.7
60	2.9	0.9	0.6	0.6	0.7
65	2.7	0.8	0.6	0.7	0.8
70	2.6	0.7	0.6	0.7	0.8
75	2.6	0.6	0.6	0.7	0.8
80	2.6	0.5	0.6	0.7	0.9
85	2.5	0.5	0.6	0.7	0.8
90	1.6	0.6	0.6	0.7	0.8
95	1.8	0.6	0.6	0.6	0.8
100	1.6	0.7	0.6	0.5	0.7
105	1.5	0.8	0.6	0.5	0.6
110	1.5	0.8	0.6	0.5	0.6
115	1.5	0.8	0.7	0.5	0.5
120	1.6	0.9	0.6	0.5	0.5
125	1.6	0.9	0.7	0.5	0.5
130	1.7	1.0	0.7	0.5	0.5
135	2.0	1.1	0.7	0.4	0.5
140	1.8	1.2	0.8	0.5	0.4
145	1.8	1.3	0.8	0.5	0.4
150	1.8	1.3	0.8	0.4	0.4
155	1.9	1.4	0.9	0.5	0.5
160	1.5	1.3	0.9	0.4	0.5
165	1.1	0.9	0.9	0.5	0.5
170	1.0	0.6	0.8	0.6	0.6
175	0.6	0.5	0.5	0.8	0.7
180	1.0	1.1	1.2	0.7	0.1

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens (lm)	% Luminaire (%)
700PLUF24x-LED927		
0-30	27.23	2.41
0-40	66.85	5.91
0-60	222.0	19.63
0-90	612.77	54.19
60-90	390.77	34.56
0-180	1130.80	100

Beam Angle

Total Beam Angle (°)


127.9

Illumination Plots

Model No.: 700PLUF24x-LED927

Mount Height: 2.5 m

Illuminance - Cone of Light

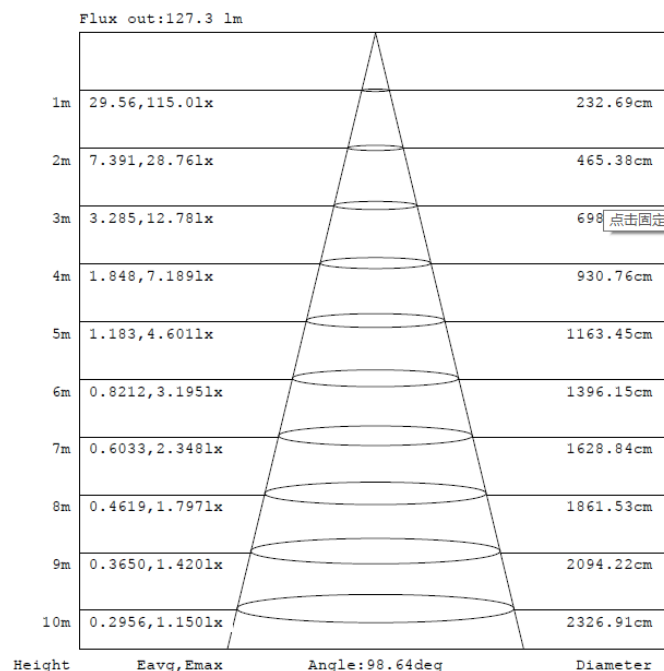

***** End of Page *****

TEST REPORT


RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700PLUF24x-LED927

Model No.: 700PLUF24x-LED927

Mount Height: 2.5 m

Isoillumination Plot

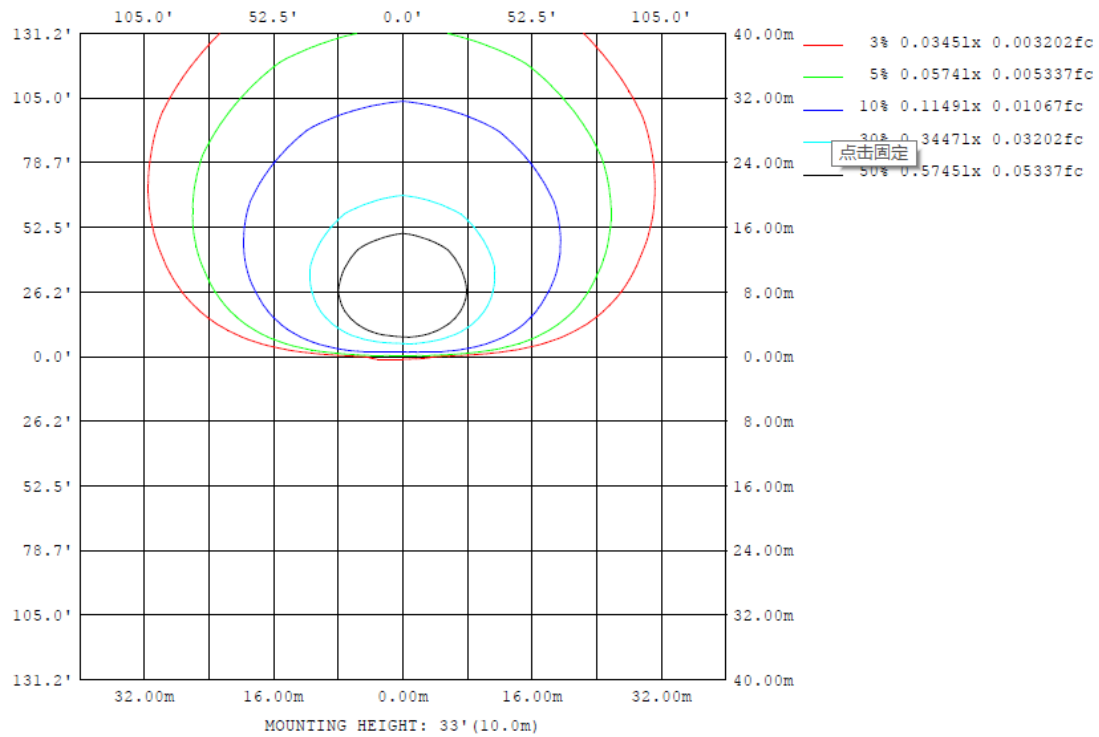

***** End of Page *****

TEST REPORT

RESULTS OF TESTS (cont'd)

Test Condition: 120V, 60Hz For 700PLUF24x-LED927







ANSI/IES TM-30-18 Color Rendition Report

Source: User SPD

Manufacturer: Visual Comfort and Company

Date: 2022/7/11

Model: 700PLUF24x-LED927

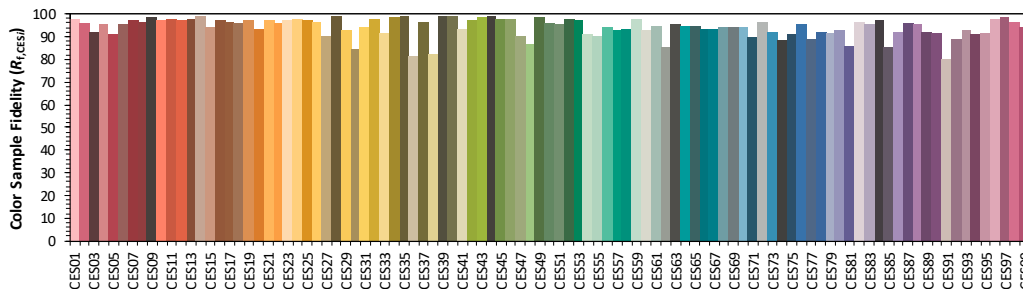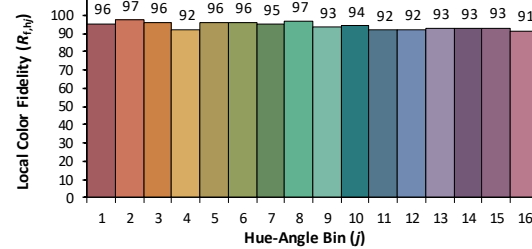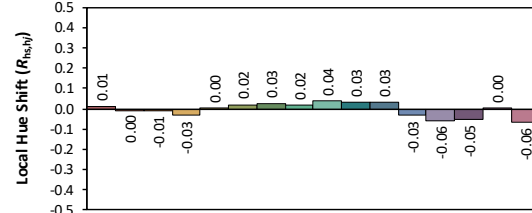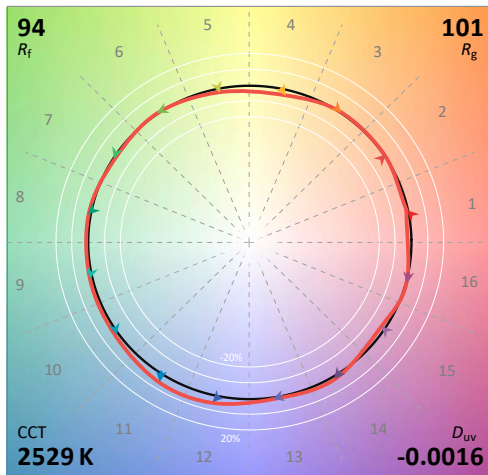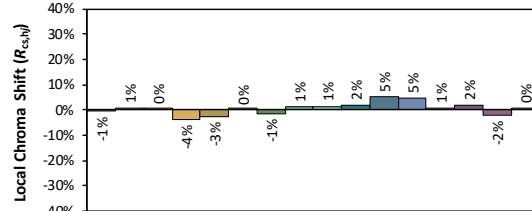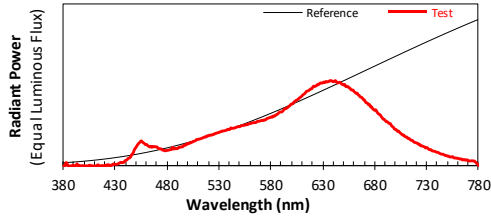

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.4714
 y 0.4084
 u' 0.2710
 v' 0.5282

CIE 13.3-1995
(CRI)


R_a 97
 R_g 96

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.00.


***** End of Page *****

TEST REPORT

PRODUCT PICTURE (not to scale)

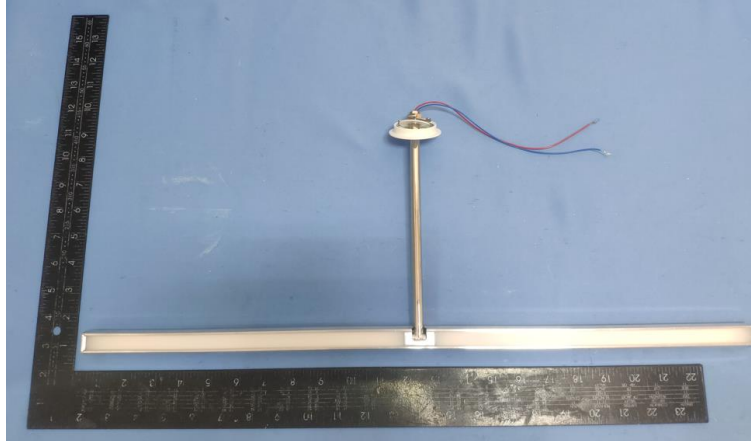

External view of 700PLUF24x-LED927

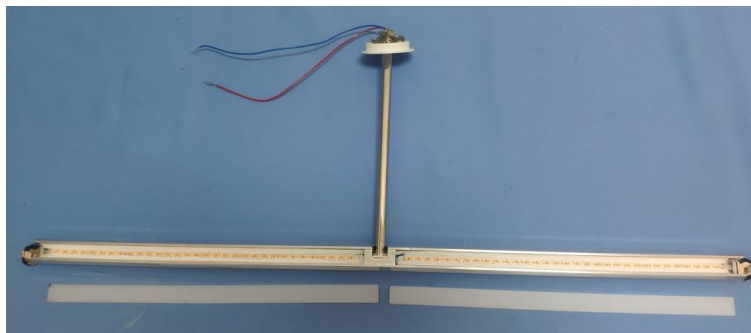

External view of 700PLUF24x-LED927

***** End of Page *****

TEST REPORT

PRODUCT PICTURE (not to scale)



View of LED Driver DS25W24VBF1UD-0000



View of LED

In Charge Of Tests:

Done Ye

Done Ye
Engineer

Report Reviewed By

Shelley Ying

Shelley Ying
Reviewer

Attachment: None

***** End of Report *****