

OUTDOOR

2018 NEW PRODUCTS





Roton 18 Pendant shown in bronze

HOW TO ORDER OUR PRODUCTS

This catalog features item number grids for ease of ordering. For example, below is the item number grid for a Voto bollard. Select from the bolded codes to build your item number of choice: 7000BVOT83042DHUNVSPCLF means you have selected the Voto Bollard, 3000K, in charcoal, with button photocontrol & in-line fuse.

7000BVOT	CRI/CCT 830	LENGTH 42 LENS D	FINISH H	VOLTAGE UNV	DISTRIBUTION S	OPTIONS PCLF
827	80 CRI, 2700K	42 42"	D DIFFUSE	Z BRONZE	UNV 120V-277V	S SYMMETRIC
830	80 CRI, 3000K		H CHARCOAL			
840	80 CRI, 4000K					
						PC NONE LF BUTTON PHOTOCONTROL PCLF IN-LINE FUSE BUTTON PHOTOCONTROL & IN-LINE FUSE

TABLE OF CONTENTS

4-5	Voto Path	20-21	Ash 8/10/12/16 Wall
6-9	Zur Bollard and Path	22-23	Bowman 12/18 Pendant
10-13	Zur 12/18/24 Wall	24-25	Aspen 8/15/26/36 Wall
14-15	Strut Path	26-27	Aspen Wedge 8/15/26/36 Wall
16-17	Roton 12/18 Pendant	28-29	Port 8/13 Wall
18-19	Ash Pendant	30-31	Root 15/20 Wall



ILLUMINATING YOUR ENVIRONMENT, FROM DUSK TO DAWN.

Blending contemporary aesthetics with meticulous attention to engineering detail, Tech Lighting outdoor fixtures complement a structure's architectural vision and intent, day or night. After dark, our outdoor lighting defines exterior space by enhancing spatial details, defining pedestrian paths, and contributing to a sense of safety and security.



Voto Path shown in bronze

Simple elegance is taken to a whole new level with the Voto path. A minimalist metal body contrasts with a symmetrical reveal cut from a solid piece of optically pure acrylic. Beautiful LED light pours from the bottom of the thick-cut acrylic to provide ample illumination.

SPECIFICATIONS


DELIVERED LUMENS	500
WATTS	10
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



VOTO PATH
shown in bronze

VOTO PATH
shown in charcoal

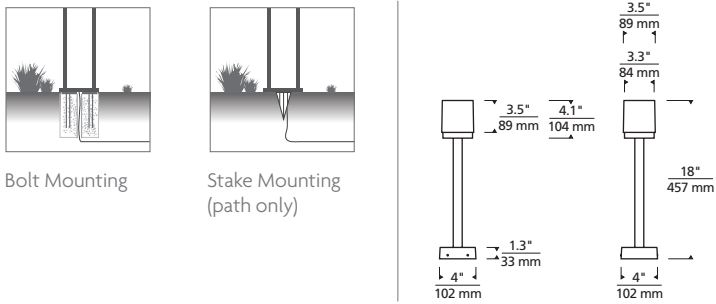

VOTO PATH

700OAVOT	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	927 90 CRI, 2700K	18 18"	D DIFFUSE	Z BRONZE	12 12V*	S SYMMETRIC	CONCRETE MOUNT
	930 90 CRI, 3000K			H CHARCOAL			ST STAKE MOUNTING KIT

12V AC TRANSFORMERS (OUTDOOR RATED)

ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
7000T300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

*12V TRANSFORMER ORDERED SEPARATELY.




Zur Path and Wall shown in bronze

Exhibiting a refined and unadorned minimalist aesthetic, the Zur bollard and path lights feature an innovative 300° pivot design that aims light precisely for way-finding, architectural accents or landscape illumination. Zur bollards and path lights blend seamlessly into contemporary architecture and landscapes while providing efficient LED illumination.


SPECIFICATIONS

DELIVERED LUMENS	Bollard: 1400 (120V), 920 (12V) Path: 700
WATTS	Bollard: 20 or 15 Path: 8
VOLTAGE	Bollard: Universal 120-277V, with integral transient 2.5kV surge protection or 12V. Path: 12V (Transformer sold separately)
SECONDARY SURGE PROTECTOR	10kA, 120-277V (bollard only)
DIMMING	Bollard: 0-10, ELV Path: MLV
LIGHT DISTRIBUTION	Adjustable
OPTICS	40° (2)
MOUNTING OPTIONS**	Bollard: Bolt Path: Bolt or Stake
ADJUSTABILITY	Head pivots 300°
PERFORMANCE OPTIONS	In-Line Fuse (120V)
CCT	2700K, 3000K or 4000K
CRI	Bollard: 80+ Path: 90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Compliant (Aimed down)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.
**Bollard base not suitable for branch circuit through wiring.




Bolt Mounting



Stake Mounting
(path only)



ZUR BOLLARD AND PATH

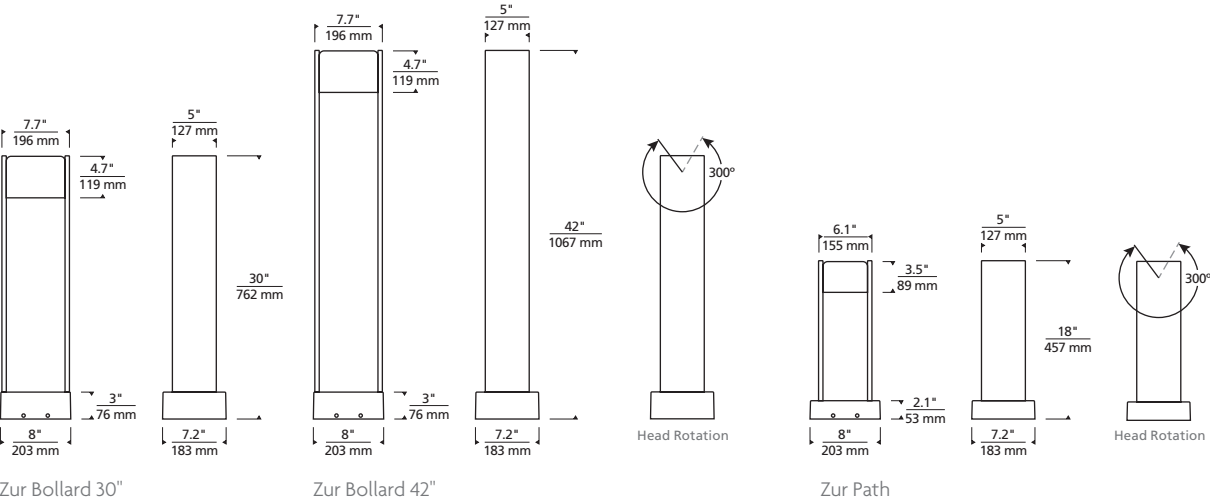

ZUR BOLLARD

7000BZUR	CRI/CCT	LENGTH	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
827	80 CRI, 2700K	30 30"	Z BRONZE	UN 120V-277V	A ADJUSTABLE	NONE
830	80 CRI, 3000K	42 42"	B BLACK	12 12V**		LF IN-LINE FUSE*
840	80 CRI, 4000K					

*IN-LINE FUSE FOR USE ONLY IN 120V-277V VERSION.
**12V TRANSFORMER ORDERED SEPARATELY.

ZUR PATH

7000AZUR	CRI/CCT	LENGTH	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	18 18"	Z BRONZE	12 12V*	A ADJUSTABLE	CONCRETE MOUNT
930	90 CRI, 3000K		B BLACK			ST STAKE MOUNTING KIT

*12V TRANSFORMER ORDERED SEPARATELY.

12V AC TRANSFORMERS* (OUTDOOR RATED)

ITEM	DESCRIPTION	HOUSING	DIMMING
7000T150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
7000T150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
7000T300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
7000T300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

*PATH ONLY.

ZUR
Bollard and Path



Zur Bollard shown in bronze





Zur Wall shown in bronze

As with Zur bollards and path lights, the Zur outdoor wall sconce features an innovative 240° pivot design that aims light precisely for way finding and general illumination. The refined, unadorned minimalism of the Zur wall sconce allows it to become an ideal complement to contemporary architecture.

SPECIFICATIONS

DELIVERED LUMENS	Zur 12: 880 Zur 18: 1400 Zur 24: 1400
WATTS	Zur 12: 12 Zur 18: 20 Zur 24: 20
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Adjustable
OPTICS	40° (2)
MOUNTING OPTIONS	Wall
ADJUSTABILITY	Head pivots 240°
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Compliant (Aimed down)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



Head pivots 240°

ZUR 12
shown in bronze



Head pivots 240°


ZUR 18
shown in bronze



Head pivots 240°

ZUR 24
shown in black

ZUR 12/18/24 WALL

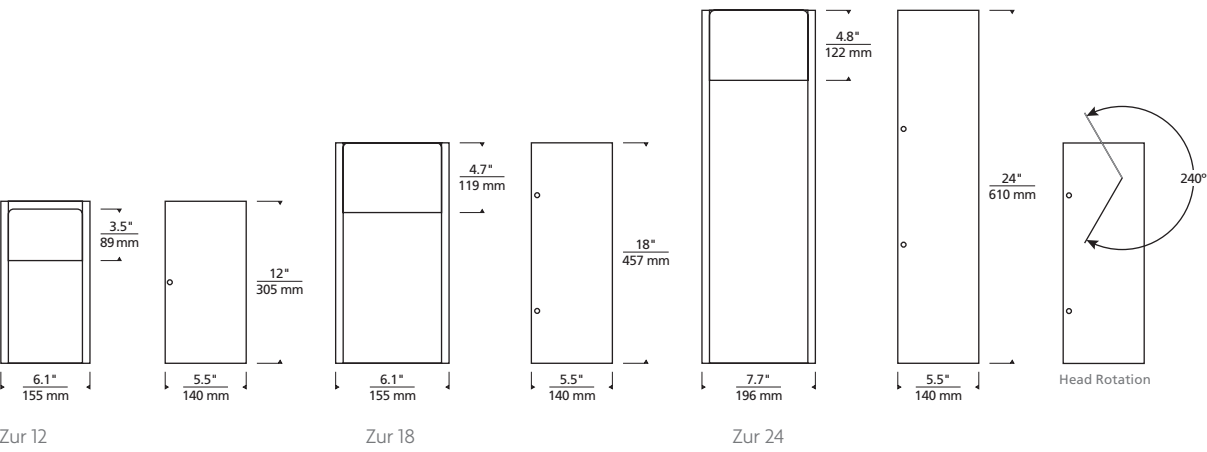

ZUR WALL

7000WZUR	CRI/CCT	LENGTH	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	12 12"	Z BRONZE	UNV 120V-277V	A ADJUSTABLE	NONE
930	90 CRI, 3000K	18 18"	B BLACK			PC BUTTON PHOTOCONTROL
940	90 CRI, 4000K	24 24"				LF IN-LINE FUSE
						PL BUTTON PHOTOCONTROL, IN-LINE FUSE

ZUR 12/18/24
Wall



ZUR Wall shown in bronze



Strut Path shown in charcoal

The Strut LED path exemplifies the epitome of modern, minimalist aesthetics. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. A singular line of LED down light with wide, Type II distribution is ideal for outdoor path and campus illumination.

SPECIFICATIONS


DELIVERED LUMENS	500
WATTS	10
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



STRUT PATH
shown in bronze

STRUT PATH
shown in charcoal

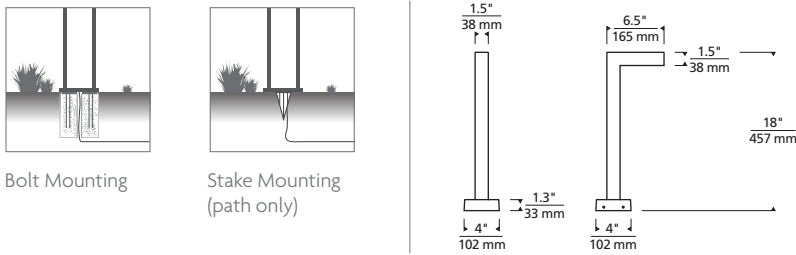

STRUT PATH

700OASTR	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	18 18"	D DIFFUSE	Z BRONZE	12 12V*	S SYMMETRIC	CONCRETE MOUNT
930	90 CRI, 3000K			H CHARCOAL			STAKE MOUNTING KIT
				B BLACK			

12V AC TRANSFORMERS (OUTDOOR RATED)

ITEM	DESCRIPTION	HOUSING	DIMMING
700OT150T	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
700OT150T277	MAGNETIC, 150W, 277V	STAINLESS STEEL	MAGNETIC
700OT300T	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC
700OT300T277	MAGNETIC, 300W, 277V	STAINLESS STEEL	MAGNETIC

*12V TRANSFORMER ORDERED SEPARATELY.




The Roton pendant makes an impressive design statement in the simplicity and scale of its cylindrical geometry. Featuring an aluminum body and subtle diffuser, the Roton pendant houses a powerful LED light source designed to deliver softly diffused down lighting for controlled and distinctive illumination.

SPECIFICATIONS

DELIVERED LUMENS	Roton 12: 1800 Roton 18: 2800
WATTS	Roton 12: 20 Roton 18: 35
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV, Triac
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.

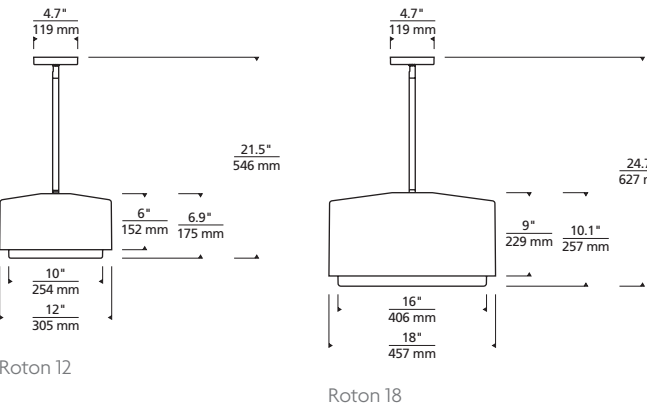

ROTON PENDANT				
7000PROT	CRI / CCT	WIDTH	FINISH	VOLTAGE
927	90 CRI, 2700K	12" 12"	Z BRONZE	UNV 120V-277V
930	90 CRI, 3000K	18" 18"	H CHARCOAL	
940	90 CRI, 4000K		B BLACK	

RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS).

Roton 18 Pendant shown in bronze



Ash Pendant shown in bronze

The Ash pendant and wall sconce are a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and either an acrylic diffuser that creates an intriguing column of light, or a clear lens hidden within the shade for beautifully even LED illumination with minimal uplight.

SPECIFICATIONS


DELIVERED LUMENS	619 or 1115 with clear cylinder 400 or 863 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



ASH PENDANT
shown in charcoal/clear cylinder

ASH PENDANT
shown in bronze/clear lens

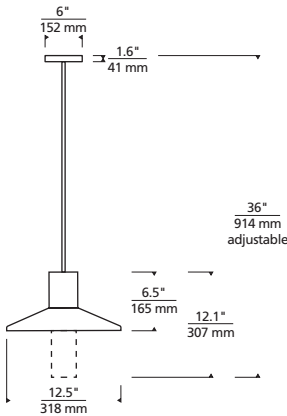

ASH PENDANT

7000PASH	CRI / CCT	LENS	FINISH	VOLTAGE
L927	LED LO-OUTPUT 90 CRI, 2700K	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL
H927	LED HI-OUTPUT 90 CRI, 2700K	D CLEAR LENS	H CHARCOAL	
L930	LED LO-OUTPUT 90 CRI, 3000K			
H930	LED HI-OUTPUT 90 CRI, 3000K			

RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS).



Ash Wall shown in bronze

SPECIFICATIONS

DELIVERED LUMENS	Ash 8: 515 or 1189 with clear cylinder 300 or 613 with clear lens
	Ash 10: 529 or 1114 with clear cylinder 381 or 675 with clear lens
	Ash 12: 619 or 1115 with clear cylinder 400 or 863 with clear lens
	Ash 16: 591 or 1255 with clear cylinder 567 or 1406 with clear lens
WATTS	8 or 18
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Lensed version only)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



ASH 8
shown in charcoal/clear cylinder




ASH 10
shown in bronze/clear lens



ASH 12
shown in charcoal/clear lens



ASH 16
shown in bronze/clear cylinder

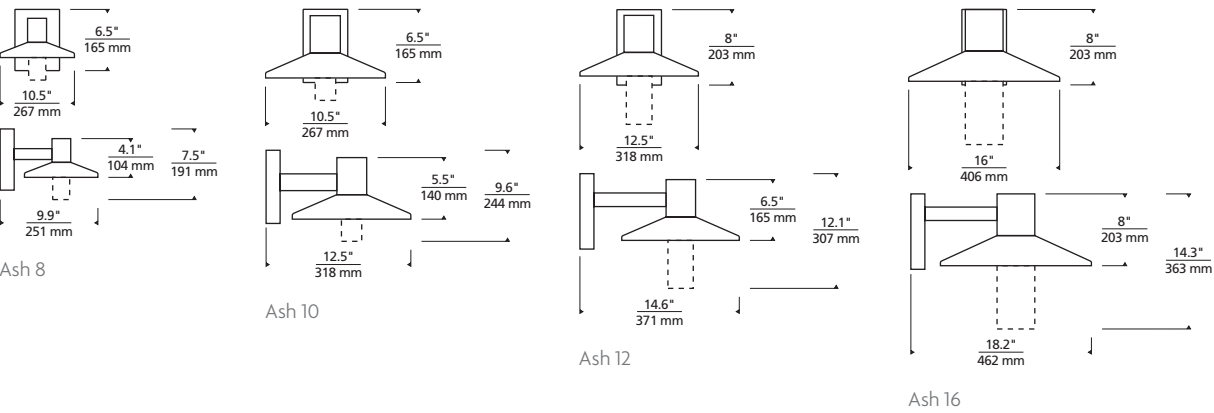

ASH WALL

7000WASH	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
L927	LED LO-OUTPUT 90 CRI, 2700K	8 8"	C CLEAR CYLINDER	Z BRONZE	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION
H927	LED HI-OUTPUT 90 CRI, 2700K	10 10"	D CLEAR LENS	H CHARCOAL			BUTTON PHOTOCONTROL & IN-LINE FUSE
L930	LED LO-OUTPUT 90 CRI, 3000K	12 12"					BUTTON PHOTOCONTROL & SURGE PROTECTION
H930	LED HI-OUTPUT 90 CRI, 3000K	16 16"					IN-LINE FUSE & SURGE PROTECTION BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION




Bowman 18 Pendant shown in bronze, 3" Adjustable Downlight with wood ceiling option by ELEMENT

The classic profile of the Bowman pendant makes a strong design statement in both residential and commercial outdoor environments. Featuring an aluminum body and subtle diffuser, the Bowman pendant houses a powerful LED light source designed to deliver softly diffused down lighting for controlled illumination.

SPECIFICATIONS

DELIVERED LUMENS	Bowman 12: 1800 Bowman 18: 2800
WATTS	Bowman 12: 20 Bowman 18: 35
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV, Triac
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Ceiling
ADJUSTABILITY	Adjustable stem length
CCT	2700K, 3000K or 4000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	N/A
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.

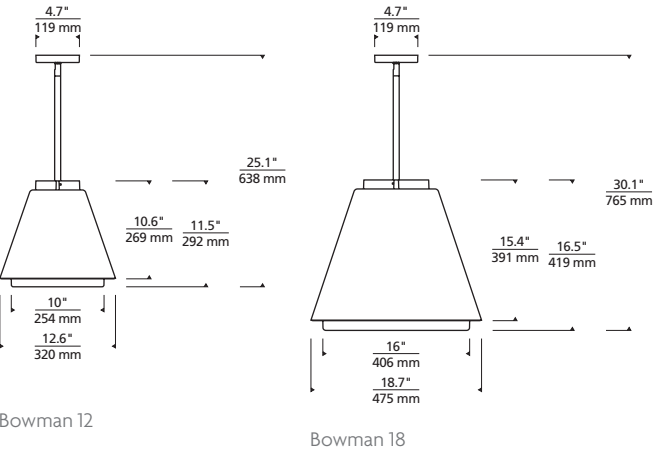

BOWMAN PENDANT

7000PBOW	CRI / CCT	WIDTH	FINISH	VOLTAGE
927	90 CRI, 2700K	12 12"	Z BRONZE	UNV 120V-277V
930	90 CRI, 3000K	18 18"	H CHARCOAL	
940	90 CRI, 4000K		B BLACK	

RIGID STEM ONLY (ADJUSTABLE 3", 6" AND 12" LENGTHS).




Aspen 26 Wall show in charcoal

The Aspen wall sconce creates an elegant column of beautifully diffused light. Light emerges from the minimalist rectilinear design giving off ample amounts of beautiful multi-directional illumination. The Aspen is available in four sizes to meet architectural scale; ideal for way-finding and general outdoor illumination.


SPECIFICATIONS

DELIVERED LUMENS	8: 390 15: 648 26: 1060 36: 1508
WATTS	8: 15 15: 22 26: 38 36: 48
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.

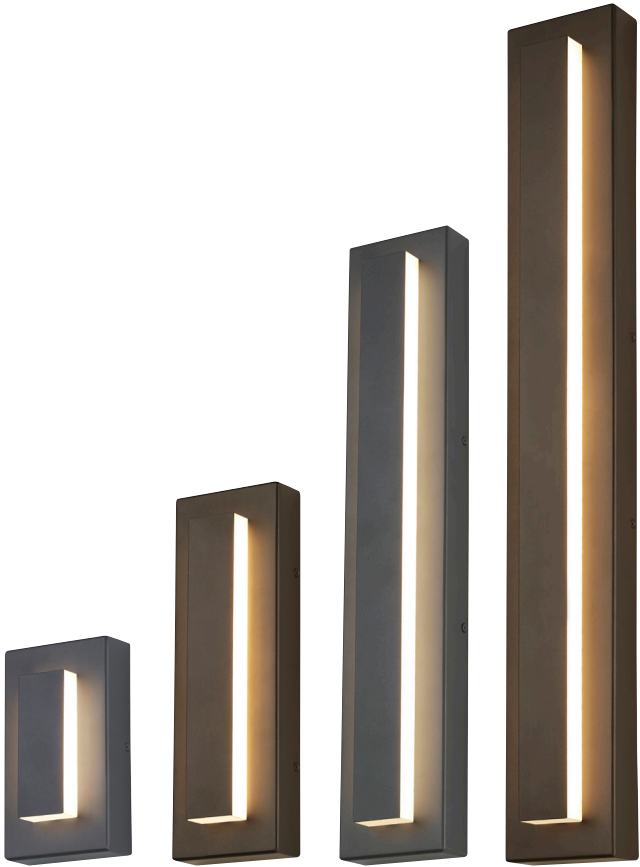

ASPEN 8 shown in charcoal ASPEN 15 shown in bronze ASPEN 26 shown in charcoal ASPEN 36 shown in bronze

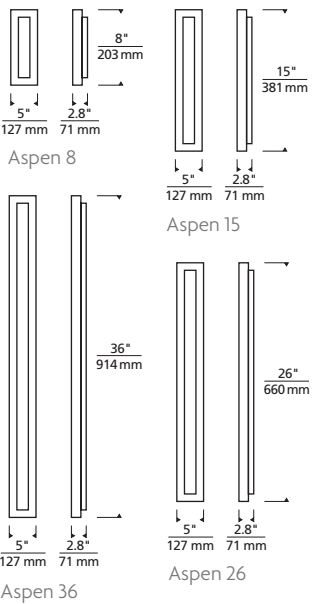

ASPEN WALL SCONCE

7000WASP	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	8" 8"	D DIFFUSE	Z BRONZE	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE
930	90 CRI, 3000K	15" 15"		H CHARCOAL			LF IN-LINE FUSE
		26" 26"					SP SURGE PROTECTION
		36" 36"					LFSP IN-LINE FUSE & SURGE PROTECTION



Aspen Wedge 26 shown in bronze

The Aspen Wedge creates an elegantly tapered rectilinear column of diffused light that can be mounted with the wedge angled up or down. Light emerges from the minimalist design giving off ample amounts of beautiful multi-directional illumination. The Aspen Wedge is ideal for way-finding and general outdoor illumination.


SPECIFICATIONS

DELIVERED LUMENS	8: 390 15: 648 26: 1060 36: 1508
WATTS	8: 15 15: 22 26: 38 36: 48
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.



ASPEN WEDGE 8 shown in bronze ASPEN WEDGE 15 shown in bronze ASPEN WEDGE 26 shown in charcoal ASPEN WEDGE 36 shown in charcoal

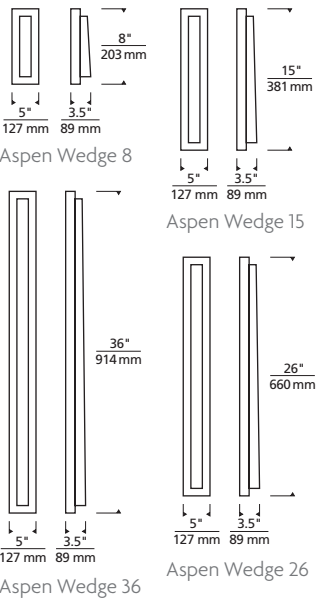

ASPEN WEDGE WALL SCONCE

7000WASPW	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
927	90 CRI, 2700K	8 8"	D DIFFUSE	Z BRONZE	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE
930	90 CRI, 3000K	15 15"		H CHARCOAL			IN-LINE FUSE
		26 26"					SURGE PROTECTION
		36 36"					IN-LINE FUSE & SURGE PROTECTION




Port 13 Round shown in charcoal, Hex chandelier by Tech Lighting

The simple square or circle designs of the Port wall sconce are completely backlit to create a soft glow of illumination enhancing the geometry of the fixture. For added style the Port round and square fixtures can be used individually or mixed to create intriguing outdoor lighting effects and both shapes come in two sizes to meet the architectural scale of their surroundings.

SPECIFICATIONS

DELIVERED LUMENS	Port 8: 743 Port 13: 662
WATTS	Port 8: 18 Port 13: 32
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV, TRIAC
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.

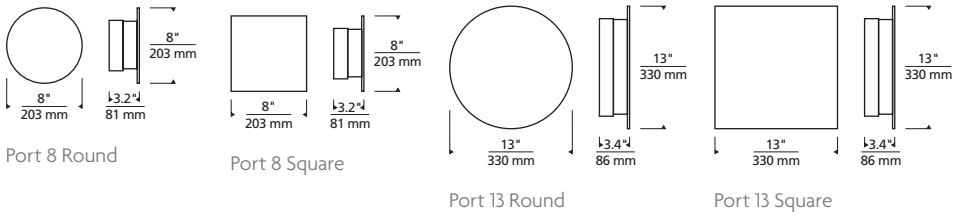

PORT WALL

7000WPRT	SHAPE	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	R ROUND S SQUARE	930 90 CRI, 3000K	8 8" 13 13"	F FROSTED	B BLACK Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE LF IN-LINE FUSE SP SURGE PROTECTION LFSP IN-LINE FUSE & SURGE PROTECTION



The Root wall sconce features a line of diffused LED light aimed for downward grazing of outdoor passageways or paths. The hexagonal shape and minimized style of the Root bring a very contemporary look and feel to any outdoor space. This geometrically inspired light fixture can be installed with an open aperture, optional weaved wire mesh or perforated metal diffuser for added visual interest.

SPECIFICATIONS


DELIVERED LUMENS	308
WATTS	15
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
optics	40°
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse / Surge Protector
CCT	3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years

* Visit techlighting.com for specific warranty limitations and details.




ROOT 15
shown in bronze
(open aperture)

ROOT 20
shown in charcoal
(wire mesh shown)



Root 15



Root 20

ROOT WALL

7000WROT	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	930 90 CRI, 3000K	15 15" 20 20"	C CLEAR	Z BRONZE H CHARCOAL	UNV 120V-277V UNIVERSAL	S SYMMETRIC	NONE BUTTON PHOTOCONTROL IN-LINE FUSE SURGE PROTECTION BUTTON PHOTOCONTROL & IN-LINE FUSE BUTTON PHOTOCONTROL & SURGE PROTECTION IN-LINE FUSE & SURGE PROTECTION BUTTON PHOTOCONTROL, IN-LINE FUSE & SURGE PROTECTION
							PC LF SP PCLF PCSP LFSP PCLFSP

Root Wall shown in charcoal



For over 25 years, Tech Lighting has been the industry leader in contemporary decorative fixtures and low-voltage lighting systems. Since inception, we have expanded well beyond our roots, and today our portfolio transcends any specific aesthetic or categorical definitions. Tech Lighting is rooted in innovative design, uncompromising quality, and cutting edge LED technology.

At Tech Lighting, we do not produce light fixtures by the thousands. They are individual works of art, specially crafted by incredibly dedicated and talented artisans. We strive for timeless yet original design with an obsessive focus on every detail to enable our lighting to make your project truly extraordinary.

Today, we have gained broad recognition on the architectural side of our business for balancing an absolute passion for every design detail with a deep concern for the way our fixtures illuminate a space. We never lose sight of the individuals that actually use our products, nor the professionals who specify them. We care about what you care about.

Visit techlighting.com to see the expansive breadth of our offering.



TECH LIGHTING®

7400 Linder Ave.
Skokie, IL 60077

T 847 410 4400

F 847 410 4500

W techlighting.com

921TLODBRO18